

## 40E Series - Endless Design Hot Food Case



Model No.	Description	Length	Depth	Height	Voltage	Amps	Power Cord	Est. Ship Weight
<b>CHS40E-4</b>	3 Wells	52.5"	39"	53"	120	4.4/11.6	NO	450
<b>CHS40E-6</b>	4 Wells	76.5"	39"	53"	120	5.8/17.6	NO	595
<b>CHS40E-8</b>	6 Wells	100.5"	39"	53"	120	8.7/23.1	NO	1025

MODEL NUMBER PREFIX - SC = Self Contained R = Remote  
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting  
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity  
 • Cases are equipped with drains; check your local building codes for connection requirements.  
 • Specification subject to change without notice  
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



## 40E Series - Endless Design Hot Food Case

### Standard Specifications and Optional Features

#### CONSTRUCTION

- Foamed in place CFC free foam
- Single pane tempered front safety glass
- Heavy gauge steel super structure
- ETL listed for safety and sanitation
- New extruded doors and door tracks

#### INTERIOR

- Stainless steel ends
- Stainless steel deck area around wells (for easy cleaning)
- 12x20 Wet or dry heated individual wells
- Individual thermostatically controlled wells
- Separate drain for each well
- Coated heat lamp over each well

#### EXTERIOR

- White, black, and stainless steel front and ends
- Stainless Steel exterior rear
- Stainless steel mirror trim
- Double pane rear removable doors
- Stainless steel heavy gauge top - 17" W
- Vented front minimizes moisture on glass
- 1" bumper

**THIS HOT CASE IS MADE TO MATCH THE 40E SERIES SERVICE CASES**

#### *Important Note:*

***Due to safety concerns - the end panels can not be removed nor can this be connected to any other 40E Series unit.***

#### Electrical Requirements

Model No.	Wells	Volts	Phase	AMPS
<b>CHS40E-4</b>	3	120V/208V	1	4.4A/17.3A
		120V/240V	1	4.4A/20.0A
		120V/208V	3	4.4A/10.0A
		120V/240V	3	4.4A/11.6A
<b>CHS40E-6</b>	4	120V/208V	1	5.8A/23.1A
		120V/240V	1	5.0A/26.7A
		120V/208V	3	5.8A/15.3A
		120V/240V	3	5.8A/17.6A
<b>CHS40E-8</b>	6	120V/208V	1	8.7A/34.6A
		120V/240V	1	8.7A/40.0A
		120V/208V	3	8.7A/20.0A
		120V/240V	3	8.7A/23.1A



## 40E Series - Endless Design Hot Food Case

### Technical Data

Model No.	CHS40E-4	CHS40E-6	CHS40E-8
Length	52.5"	76.5"	100.5"
Height	53"	53"	53"
Depth	39"	39"	39"
# of wells	3	4	6
(Dimensions are +/- 1/4")			
Voltage - standard	120/240	120/240	120/240
Phase	3	3	3
Amperage	4.4/11.6	5.8/17.6	8.7/23.1
Voltage - optional	120/208	120/208	120/208
Phase	1	1	1
Amperage	4.4/17.3	5.8/23.1	8.7/34.6
Voltage - optional	120/240	120/240	120/240
Phase	1	1	1
Amperage	4.4/20.0	5.8/26.7	8.7/40.0
Voltage - optional	120/208	120/208	120/208
Phase	3	3	3
Amperage	4.4/10.0	5.8/15.3	8.7/20.0
Exterior color	W, B, S	W, B, S	W, B, S
Interior color	S	S	S
Floors	S	S	S
# of top rear doors	2	2	4
Front viewing area	19.75"	19.75"	19.75"
Bottom Storage	NO	NO	NO
Door size	20.8" x 23.5"	31.3" x 32.62"	20.8" x 23.5"
<b>Shipping Info</b>			
Height	58"	58"	58"
Depth	45"	45"	45"
Length	61"	87"	109"
Gross weight	450	596	1025
Cubic feet	90	128	164

## 40E Series - Endless Design Hot Food Case

### Technical Data • Side View • Plan View

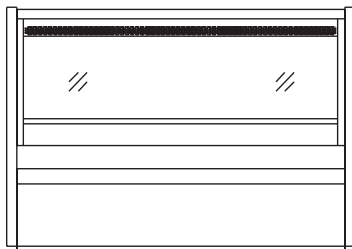
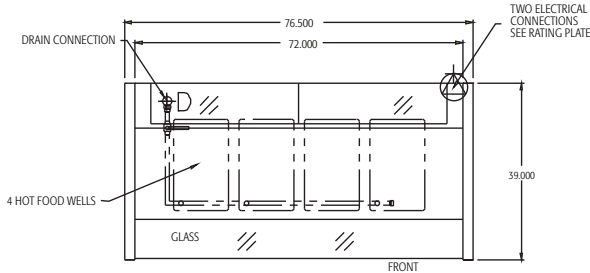


**CHS40E-6**

6' ELECTRICAL INFO

208/120V SINGLE PHASE 23.1/5.8 AMPS 30/15 FUSE  
240/120V SINGLE PHASE 26.7/5.8 AMPS 35/15 FUSE

208/120V 3PHASE 15.3/5.8 AMPS 20/15 FUSE  
240/120 3PHASE 17.6/5.8 AMPS 25/15 FUSE


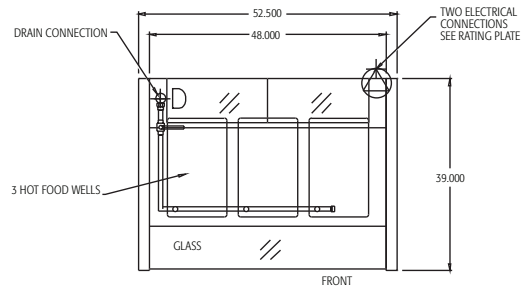


**CHS40E-4**

4' ELECTRICAL INFO

208/120V SINGLE PHASE 17.3/4.4 AMPS 25/15 FUSE  
240/120V SINGLE PHASE 20.0/4.4 AMPS 25/15 FUSE

208/120V 3PHASE 10.0/4.4 AMPS 15/15 FUSE  
240/120 3PHASE 11.6/4.4 AMPS 15/15 FUSE

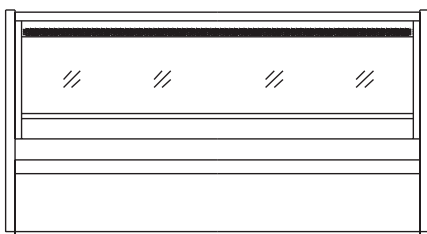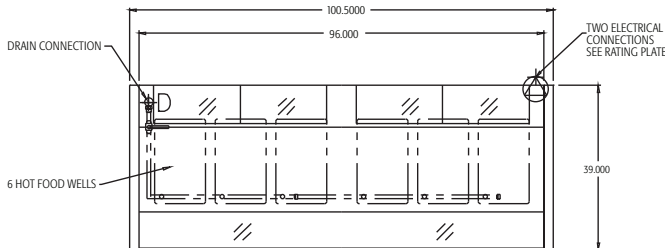

**CHS40E-8**

8' ELECTRICAL INFO

208/120V SINGLE PHASE 34.6/8.7 AMPS 40/15 FUSE  
240/120V SINGLE PHASE 40.0/8.7 AMPS 50/15 FUSE

208/120V 3PHASE 20.0/8.7 AMPS 25/15 FUSE  
240/120 3PHASE 23.1/8.7 AMPS 30/15 FUSE

