




Open Merchandisers

New Product

SC-OD40E-6S-B

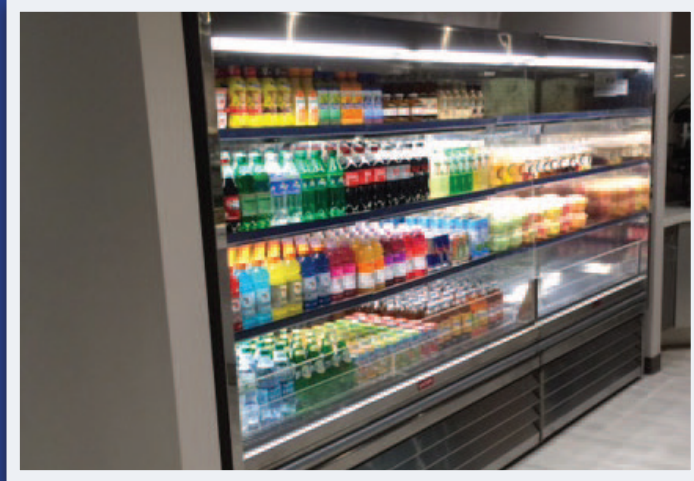

SC-OD40E-6L-C-B



SC-OD40E-4L-B

40E-C – Multi Purpose 53" High Curved Glass and Solid Endless Design Same Capacity

Features

Endless Design Allows for Line-Ups
Stylish End Panel Designs
Solid End Panel is Designed to Line Up with
40E CurvedGlass Service case Series
Solid End Panel for Endless Design or Stand Alone
Curved Plexi Ends for Endless Design or Stand Alone
12" Canopy for more product display
Choice of Colors –
Black, White or Stainless Steel (Depending on Model)
Choice of End Trim Color –
Gray or Black
Self Contained or Remote Refrigeration System

New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost to
Maintain Balanced Temperatures
2 Rows of LED Lit Shelves

Options

Optional Glass Shelving in Place of Standard Shelving
Optional Bumper Color and Sizes
Exterior Custom Paints or Laminates

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD40E-3L-LED	Self contained	40"	39"	53"	115	14.0	1/2	5-20P	655
SC-OD40E-4L-LED	Self contained	40"	51"	53"	115	15.0	1/2	5-20P	685
SC-OD40E-6L-LED	Self contained	40"	75"	53"	115/208-230	16.0	3/4	L14-20P	850

Curved Plexi Ends

SC-OD40E-3L-C-LED	Self contained	40"	39"	53"	115	14.0	1/2	5-20P	655
SC-OD40E-4L-C-LED	Self contained	40"	51"	53"	115	15.0	1/2	5-20P	685
SC-OD40E-6L-C-LED	Self contained	40"	75"	53"	115/208-230	16.0	3/4	L14-20P	850

Model No.

Model No.	Description	Depth	Length	Height	Voltage	Amps	BTUs	Power Cord	Est Ship Wt
R-OD40E-3L-LED	Remote	40"	39"	53"	115	2.0	3550	No	520
R-OD40E-4L-LED	Remote	40"	51"	53"	115	3.0	4733	No	550
R-OD40E-6L-LED	Remote	40"	75"	53"	115	4.0	7100	No	710

Curved Plexi Ends

R-OD40E-3L-C-LED	Remote	40"	39"	53"	115	2.0	3550	No	520
R-OD40E-4L-C-LED	Remote	40"	51"	53"	115	3.0	4733	No	550
R-OD40E-6L-C-LED	Remote	40"	75"	53"	115	4.0	7100	No	710

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel

MODEL NUMBER PREFIX: SC = Self Contained R = Remote
MODEL NUMBER SUFFIX: B = Black SS = Stainless Steel
• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.

- Specification subject to change without notice
- IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

REAR LOADING 30E & 35E Series Open Merchandisers.

Load from the Rear, not the front.

Designed for • Schools • Cafeterias • Convention Centers • Airports



New Product

MODEL NUMBER PREFIX: SC = Self Contained R = Remote
MODEL NUMBER SUFFIX: B = Black SS = Stainless Steel
• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.

- Specification subject to change without notice
- IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design

INTERIOR

- Black end panels
- Removable Black floor pans
- Black perforated rear wall for even air distribution (swing door only)
- Full length lighting at top of unit
- 3 or 4 levels of lit shelving
- 4 or 5 levels of product display
- Stylish tag molding on each shelf
- Mirrored customer view on slider models
- Sliding and Hinged Rear Access Doors
- Product stops on shelving

EXTERIOR

- Black ends and front and back
- Black rear doors (hinged units)
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels
- Laminate, and custom paints available

LIGHTING

- 1 row LED at inside top of unit
- 3 or 4 rows of LED lit shelving
- ELECTRICAL REQUIREMENTS
- Cord and plug (self contained only)
- UL/CUL listed
- Mirrored customer view on slider models
- Sliding and Hinged Rear Access Doors

REFRIGERATION

- Self Contained or Remote expansion valve systems
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology

OPTIONAL FEATURES

- Night covers
- Colored bumper
- Stainless steel, laminated or paint
- Product stops on shelving
- Digital thermometer
- Casters or legs
- Evaporator Pan

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP/BTUs	Power Cord	Est. Ship Weight
SC-OD30E-3-B-SW	Self contained	33.50"	39.00"	72.00"	115	12.0	1/2	5-15P	555
SC-OD30E-4-B-SW	Self contained	33.50"	51.00"	72.00"	115	13.7	1/2	5-20P	640
SC-OD30E-4-B-SL	Self contained	30.50"	51.00"	72.00"	115	13.7	1/2	5-20P	680
SC-OD30E-5-B-SL	Self contained	30.50"	63.00"	72.00"	115/208-230	13.1	1	L14-20P	810
SC-OD30E-6-B-SL	Self contained	30.50"	75.00"	72.00"	115/208-230	13.1	1	L14-20P	940
R-OD30E-3-B-SW	Remote	33.50"	39.00"	72.00"	115	1.4	3900	No	500
R-OD30E-4-B-SW	Remote	33.50"	51.00"	72.00"	115	2.2	5200	No	580
R-OD30E-4-B-SL	Remote	30.50"	51.00"	72.00"	115	2.2	5200	No	620
R-OD30E-5-B-SL	Remote	30.50"	63.00"	72.00"	115	2.8	6500	No	730
R-OD30E-6-B-SL	Remote	30.50"	75.00"	72.00"	115	2.8	7800	No	865
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP/BTUs	Power Cord	Est. Ship Weight
SC-OD35E-3-B-SW	Self contained	36.50"	39.00"	78.50"	115	16.0	1/2	5-20P	700
SC-OD35E-4-B-SW	Self contained	36.50"	51.00"	78.50"	115	13.0	3/4	L14-20P	965
SC-OD35E-4-B-SL	Self contained	34.50"	51.00"	78.50"	115	13.0	3/4	L14-20P	965
SC-OD35E-5-B-SL	Self contained	34.50"	63.00"	78.50"	115/208-230	16.0	1	L14-20P	1175
SC-OD35E-6-B-SL	Self contained	34.50"	75.00"	78.50"	115/208-230	16.0	1	L14-20P	1175
R-OD35E-3-B-SW	Remote	36.50"	39.00"	78.50"	115	1.4	4906	No	575
R-OD35E-4-B-SW	Remote	36.50"	51.00"	78.50"	115	2.2	6542	No	790
R-OD35E-4-B-SL	Remote	34.50"	51.00"	78.50"	115	2.2	6542	No	790
R-OD35E-5-B-SL	Remote	34.50"	63.00"	78.50"	115	2.8	8178	No	895
R-OD35E-6-B-SL	Remote	34.50"	75.00"	78.50"	115	2.8	9813	No	895
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP/BTUs	Power Cord	Est. Ship Weight
SC-OD35E-3S-B-SW	Self contained	36.50"	39.00"	78.50"	115	16.0	1/2	5-20P	700
SC-OD35E-4S-B-SW	Self contained	36.50"	51.00"	78.50"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-4S-B-SL	Self contained	34.50"	51.00"	78.50"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-5S-B-SL	Self contained	34.50"	63.00"	78.50"	115/208-230	16.0	1	L14-20P	1125
SC-OD35E-6S-B-SL	Self contained	34.50"	75.00"	78.50"	115/208-230	16.0	1	L14-20P	1155
R-OD35E-3S-B-SW	Remote	36.50"	39.00"	78.50"	115	1.4	4906	No	575
R-OD35E-4S-B-SW	Remote	36.50"	51.00"	78.50"	115	2.2	6542	No	790
R-OD35E-4S-B-SL	Remote	34.50"	51.00"	78.50"	115	2.2	6542	No	790
R-OD35E-5S-B-SL	Remote	34.50"	63.00"	78.50"	115	2.8	8178	No	915
R-OD35E-6S-B-SL	Remote	34.50"	75.00"	78.50"	115	2.8	9813	No	1000

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel

Howard McCRAY Announces the New LOW-BASE 35E Open Merchandiser

Increase your display with our Low Base models.



SC-OD35E-6-LB-HB*



R-OP35E-4-LB-B*



R-OM35E-4-LB-B*



SC-OP35E-4L-LB-B*



R-OD35E-4-LB-B*

*ARTIST RENDERING

STANDARD FEATURES

- NEW lower base, maximizes display space
- Self contained and remote
- Black exterior and interior
- Heavy gauge steel super structure
- Multi deck
- Endless design
- 1" bumper
- LED Lit Shelving
- Full length lighting at top of unit
- Electronic control system to maintain balanced temperatures (SC)
- Tag molding on each shelf

- Unit comes with cord and plug (SC)
- UL/CUL listed
- Self Contained or Remote Refrigeration Systems
- HB (Hybrid) Model condensing unit ships separately, not installed.

OPTIONAL FEATURES

- Wide view curved plexi end panels
- Night covers
- Product stops on shelving
- Digital thermometer
- Condensate pan and pump kit separately, not installed.

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-4L-LB-B	Self contained	34.50"	51.00"	74.00"	115/208-230	13.0	1/2	L14-20P	895
R-OD35E-4L-LB-B	Remote	34.50"	51.00"	60.00"	115	3.0	4733	No	585
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OM35E-4L-LB-B	Self contained	34.50"	51.00"	74.00"	115/208-230	13.0	1/2	L14-20P	965
R-OM35E-4L-LB-B	Remote	34.50"	51.00"	60.00"	115	3.0	4733	No	585
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OP35E-4L-LB-B	Self contained	34.50"	51.00"	74.00"	115/208-230	13.0	1/2	L14-20P	895
R-OP35E-4L-LB-B	Remote	34.50"	51.00"	60.00"	115	3.0	4733	No	550
Remote Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OD35E-4-LB-B	Remote	34.50"	51.00"	78.50"	115	3.0	7238	No	790
R-OD35E-6-LB-B	Remote	34.50"	75.00"	78.50"	115	4.0	10813	No	1040
R-OD35E-8-LB-B	Remote	34.50"	99.00"	78.50"	115	6.0	14083	No	1580
SC-OD35E-6-LB-HB (Hybrid)	Self Contained	34.50"	75.00"	91.00"	115/208-230	1/2	10813	L14-20P	1105
Remote Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OM35E-4-LB-B	Remote	34.50"	51.00"	78.50"	115	3.0	7238	No	831
R-OM35E-6-LB-B	Remote	34.50"	75.00"	78.50"	115	4.0	10813	No	1040
R-OM35E-8-LB-B	Remote	34.50"	99.00"	78.50"	115	4.0	14100	No	1580
Remote Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OP35E-4-LB-B	Remote	34.50"	51.00"	78.50"	115	3.0	7238	No	831
R-OP35E-6-LB-B	Remote	34.50"	75.00"	78.50"	115	4.0	10813	No	1040
R-OP35E-8-LB-B	Remote	34.50"	99.00"	78.50"	115	4.0	14100	No	1580

ISLAND CASE MERCHANDISER

Multi Purpose – 60"High

Features

- 3 Levels of Stainless Steel Shelving
- Shelves are Adjustable in 1" Increments
- Price Tag Molding
- LED Lit Top & 3 Shelves
- Electronically Controlled Refrigeration System
- Removable Deck Pans for Easy Access
- Black Interior And Exterior
- Black Laminated Top & Base
- Built In Product Stops at Deck Area
- All Steel Construction, Foamed in Place with CFC Free Foam
- Heavy Duty HP Condensing Unit (Self Contained Only)
- Electric Condensate Pan, Requires it's Own Receptacle
- Heavy Duty Plexiglas Front Rail
- Four Removable Bottom Grills for Easy Access
- Even Flo Air Discharge for Balanced Temperatures
- Night Covers

Options

- Optional Top Access Raceway (Electrical & Refrigeration Connections)
- Choice of Color On Interior – Stainless Steel
- Optional Laminates



Model No.	Description	Depth	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD42I-5-S-LED	Self Contained-Island Case	42.00"	60.00"	115/208-230	15	1 1/2	L14-20P	761
SC-OD42I-5-B-LED	Self Contained-Island Case	42.00"	60.00"	115/208-230	15	1 1/2	L14-20P	680
SC-OD42I-7-B-LED	Self Contained-Island Case	42.00"	84.00"	115/208-230	16	1 3/4	L14-20P	863
SC-OD42I-7-S-LED	Self Contained-Island Case	42.00"	84.00"	115/208-230	16	1 3/4	L14-20P	944
Model No.	Description	Depth	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OD42I-5-S-LED	Remote-Island Case	42.00"	60.00"	115/208-230	7	11200	No	761
R-OD42I-5-B-LED	Remote-Island Case	42.00"	60.00"	115/208-230	7	11200	No	680
R-OD42I-7-B-LED	Remote-Island Case	42.00"	84.00"	115/208-230	8	13200	No	944
R-OD42I-7-S-LED	Remote-Island Case	42.00"	84.00"	115/208-230	8	13200	No	863



SC-OD35E-33L

60"High, 34.5"Deep, 33.75"Length

Features

Interior

White, Black, or Stainless Steel End Panels
Removable White, Black, or Stainless Steel Floor Pans
White, Black, or Stainless Steel Perforated Rear Wall (For Even Air Distribution)
2 Rows of LED Lit Shelving
3 Levels of Product Display
Price Tag Molding on Each Shelf

Exterior

Removeable Front Grill Allows for Cleaning And Servicing
1" Bumper
Choice of End Panels
Laminate, and Custom Paints Available

Refrigeration

Expansion Valve System
Low Velocity Fan Located Below Deck Area (to Insure Even Flow of Air)
Electronic Control System with Automatic Air Defrost to Maintain Balanced Temperatures
Remotes Available

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-33L-B-LED	Self contained	34.5"	33.75	60"	115	14	1/2	5-20P	468

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel

GRAB-N-GO Open Merchandisers 44"High -Endless Design

Dairy, Deli, Multi-Purpose



SC-OS30E-4C-S-LED

SC-OS30E-4-B-LED



SC-OS35E-4-S-LED



SC-OS30E-4-LED

Shown with optional racks



Available in 30E & 35E Series

The 44" High x 30" or 34.5" Deep, Low Profile, Impulse Open Merchandisers, is an endless design with self-contained refrigeration, a removable step shelf, 1" high impact bumper, and your choice of designer white, glossy black aluminum or stainless steel exterior & interior.

Features

- Endless Design Allows for Line-Ups
- Choice of Colors – Black, White or Stainless Steel
- High Impact Bumper
- Choice of Straight or Curved Plexi Ends
- Self Contained or Remote Refrigeration Systems
- New High Efficiency Air Screen Technology
- Electronic Control System With Automatic Defrost to Maintain Balanced Temperatures
- Step Shelf Standard
- Condensate System
- Rear Protective Grille
- Night Cover

Options

- LED Lighting
- Shelving Packages
- Security Covers (Straight Plexi Only)
- Front Bumper, Color and Sizes
- Exterior Custom Paints or Laminates
- Balanced Temperatures
- Remotes Available

SC-OS30E-4C-S-LED

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OS30E-3-LED	Self contained	30"	39"	44"	115	12.0	1/2	5-15P	445
SC-OS30E-4-LED	Self contained	30"	51"	44"	115	13.1	1/2	5-20P	475
SC-OS30E-5-LED	Self contained	30"	63"	44"	115	16.0	3/4	5-20P	500
SC-OS30E-6-LED	Self contained	30"	75"	44"	115	16.0	3/4	5-20P	525
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OS35E-3-LED	Self contained	34.5"	39"	44"	115	12.0	1/2	5-15P	463
SC-OS35E-4-LED	Self contained	34.5"	51"	44"	115	13.1	1/2	5-20P	494
SC-OS35E-5-LED	Self contained	34.5"	63"	44"	115	16.0	3/4	5-20P	520
SC-OS35E-6-LED	Self contained	34.5"	75"	44"	115	16.0	3/4	5-20P	546

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number

30E Open Merchandisers 60" & 72" High Endless Design

Dairy, Packaged Meats, Produce or Multi-Purpose

Features

Available for Dairy, Packaged Meats, Produce or Multi-Purpose
Endless Design Allows for Line-Ups
Choice of Colors – Black, White or Stainless Steel
Available in 60" and 72" Heights
2 Rows of LED Lit Shelves on 60" High - (Dairy & Meat Only)
3 Rows of LED Lit Shelves on 72" High - (Dairy & Meat Only)
15" Mirror with 1 Lit Shelf on Produce Case
Price Tag Molding on Shelves
Choice of Different Style 1½" Thick End Panels
– Curved Plexi, Straight Plexi or Solid
Self Contained or Remote Refrigeration System
New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost to Maintain
Balanced Temperatures
Drain Is Required

Options

Back-To-Back Island Option Available on 60" Units
Night and Security Covers Available
Front Bumper, Color and Sizes
Exterior Custom Paints or Laminates
Remotes Available



SC-OD30E-5L-S-LED



SC-OD30E-4L-LED



SC-OM30E-4L-B-LED

Open Merchandisers



SC-OD30E-4-S-LED



SC-OD30E-4-LED

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD30E-3L-LED	Self contained	30"	39"	60"	115	11.9	1/2	5-15P	505
SC-OD30E-4L-LED	Self contained	30"	51"	60"	115	12.6	1/2	5-20P	585
SC-OD30E-5L-LED	Self contained	30"	63"	60"	115/208-230	11.3	3/4	L14-20P	698
SC-OD30E-6L-LED	Self contained	30"	75"	60"	115/208-230	11.3	3/4	L14-20P	810
SC-OD30E-8L-LED	Self contained	30"	99"	60"	115/208-230	14.3	1	L14-20P	1035
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD30E-3-LED	Self contained	30"	39"	72"	115	12	1/2	5-15P	535
SC-OD30E-4-LED	Self contained	30"	51"	72"	115	13.7	1/2	5-20P	615
SC-OD30E-5-LED	Self contained	30"	63"	72"	115/208-230	13.1	1	L14-20P	738
SC-OD30E-6-LED	Self contained	30"	75"	72"	115/208-230	13.1	1	L14-20P	860
SC-OD30E-8-LED	Self contained	30"	99"	72"	115/208-230	14.3	1	L14-20P	1085
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OD30E-3-LED	Remote	30"	39"	72"	115	1.4	3900	No	482
R-OD30E-4-LED	Remote	30"	51"	72"	115	2.2	5200	No	554
R-OD30E-5-LED	Remote	30"	63"	72"	115	2.8	6500	No	664
R-OD30E-6-LED	Remote	30"	75"	72"	115	2.8	7800	No	774
R-OD30E-8-LED	Remote	30"	99"	72"	115	4.3	10400	No	977
R-OD30E-10-LED	Remote	30"	123"	72"	115	7.0	13000	No	1328
R-OD30E-12-LED	Remote	30"	147"	72"	115	8.0	15600	No	1548

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number



SC-OM35E-4L-B-LED

35E Open Merchandisers, Endless Design

35E-L (low profile) 60" High

35E-S (sloped profile) 78.5" High

Features

Available for Dairy, Packaged Meats, Produce or Multi-Purpose
 Endless Design Allows for Line-Ups
 Fits Through Most Doorways
 2 Rows of LED Lit Shelves on 60"H (Dairy & Meat Only)
 4 Rows of LED Lit Shelves on 78.5"H (Dairy & Meat Only)
 Price Tag Molding on Shelves
 15" Mirror (with 1 lit shelf) on Produce Case
 Choice of Colors – Black, White or Stainless Steel
 Choice of 3 Different Style 1½" End Panels
 – Curved Plexi, Straight Plexi or Solid (60" High Units)
 Choice of 4 Different Style 1½" End Panels
 – Curved Plexi, Straight Plexi or Solid (78.5" High Units)
 Self Contained or Remote Refrigeration System
 New High Efficiency Air Screen Technology
 Electronic Control System With Automatic Defrost to Maintain
 Balanced Temperatures
 Drain is Required
 Exterior Custom Paints or Laminates

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-3L-LED	Self contained	34.5"	39"	60"	115	14.0	1/2	5-20P	655
SC-OD35E-4L-LED	Self contained	34.5"	51"	60"	115	15.0	1/2	5-20P	685
SC-OD35E-5L-LED	Self contained	34.5"	63"	60"	115/208-230	16.0	3/4	L14-20P	768
SC-OD35E-6L-LED	Self contained	34.5"	75"	60"	115/208-230	16.0	3/4	L14-20P	850
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
R-OD35E-3L-LED	Remote	34.5"	39"	60"	115	2.0	3550	No	520
R-OD35E-4L-LED	Remote	34.5"	51"	60"	115	3.0	4733	No	585
R-OD35E-5L-LED	Remote	34.5"	63"	60"	115	4.0	5917	No	728
R-OD35E-6L-LED	Remote	34.5"	75"	60"	115	4.0	7100	No	810
R-OD35E-8L-LED	Remote	34.5"	99"	60"	115	6.0	9466	No	1080
R-OD35E-10L-LED	Remote	34.5"	123"	60"	115	7.0	11833	No	1300
R-OD35E-12L-LED	Remote	34.5"	147"	60"	115	8.0	14200	No	1560

Recommended Operation Conditions – 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number

Open Merchandisers



R-OD35E-8S-LAM-LED



SC-OP35E-6S-LED

Options

Night and Security Covers
Peg Bars
Choice of End Panels
Stainless Steel, Laminated or Paint
Colored Bumpers

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-3S-LED	Self contained	34.5"	39"	78.5"	115	16.0	1/2	5-20P	700
SC-OD35E-4S-LED	Self contained	34.5"	51"	78.5"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-5S-LED	Self contained	34.5"	63"	78.5"	115/208-230	16.0	1	L14-20P	1125
SC-OD35E-6S-LED	Self contained	34.5"	75"	78.5"	115/208-230	16.0	1	L14-20P	1175
SC-OD35E-8S-LED	Self contained	36.5"	99"	78.5"	115/208-230	16.0	1 1/4	L14-20P	1580
Model No.	Description	Depth	Length	Height	Voltage	Amps	BTUs	Power Cord	Est Ship Wt
R-OD35E-3S-LED	Remote	34.5"	39"	78.5"	115	2.0	4906	No	575
R-OD35E-4S-LED	Remote	34.5"	51"	78.5"	115	3.0	6542	No	790
R-OD35E-5S-LED	Remote	34.5"	63"	78.5"	115	4.0	8176	No	915
R-OD35E-6S-LED	Remote	34.5"	75"	78.5"	115	4.0	9813	No	1000
R-OD35E-8S-LED	Remote	36.5"	99"	78.5"	115	6.0	13084	No	1580
R-OD35E-10S-LED	Remote	36.5"	123"	78.5"	115	7.0	16355	No	1790
R-OD35E-12S-LED	Remote	36.5"	147"	78.5"	115	8.0	19626	No	2000

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number

35E – 78.5" & 82.25" High – Multi Purpose Endless Design

Features

Multi-Purpose
Endless Design Allows for Line-Ups
Fits Through Most Doorways
Choice of Colors – Black, White or Stainless
78.5" High – Choice Of 4 Different Style 1½" End Panels
– Curved Plexi, Straight Plexi or Solid
82.25" High – LED Lit Canopy – Stand Alone Case
Self Contained or Remote Refrigeration System
New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost
to Maintain Balanced Temperatures
4 Rows of LED Lit Shelves
Drain is Required

Options

Night and Security Covers Available
Front Bumper, Color and Sizes
Exterior Custom Paints or Laminates



SC-OD35E-3-B-LED



SC-OD35E-5-S-LED-LC

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-3-LED	Self contained	34.5"	39"	78.5"	115	16.0	1/2	5-20P	700
SC-OD35E-4-LED	Self contained	34.5"	51"	78.5"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-5-LED	Self contained	34.5"	63"	78.5"	115/208-230	16.0	1	L14-20P	1175
SC-OD35E-6-LED	Self contained	34.5"	75"	78.5"	115/208-230	16.0	1	L14-20P	1175
Model No.	Description	Depth	Length	Height	Voltage	Amps	BTUs	Power Cord	Est Ship Wt
R-OD35E-3-LED	Remote	34.5"	39"	78.5"	115	2.0	4906	No	575
R-OD35E-4-LED	Remote	34.5"	51"	78.5"	115	3.0	6542	No	790
R-OD35E-5-LED	Remote	34.5"	63"	78.5"	115	4.0	8178	No	895
R-OD35E-6-LED	Remote	34.5"	75"	78.5"	115	4.0	9813	No	1000
R-OD35E-8-LED	Remote	36.5"	99"	78.5"	115	6.0	13082	No	1580
R-OD35E-10-LED	Remote	36.5"	123"	78.5"	115	7.0	16355	No	1790
R-OD35E-12-LED	Remote	36.5"	147"	78.5"	115	8.0	19626	No	2000
Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-3-LED-LC	Self contained	34.5"	39"	82.25"	115	16.0	1/2	5-20P	710
SC-OD35E-4-LED-LC	Self contained	34.5"	51"	82.25"	115/208-230	13.0	3/4	L14-20P	975
SC-OD35E-5-LED-LC	Self contained	34.5"	63"	82.25"	115/208-230	16.0	1	L14-20P	975
SC-OD35E-6-LED-LC	Self contained	34.5"	75"	82.25"	115/208-230	16.0	1	L14-20P	1185

Recommended Operation Conditions – 75°F @ 55% Relative Humidity

SC-OD35E-48-LED 35E Series

78.5"High, 34.5"Deep, 48"Wide Endless Design

Interior

White, Black or Stainless Steel
Removable Floor Pans
Black Rear Wall
Full Length LED Lit Top
4 Levels of LED Lit Shelving
5 Levels of Product Display
Stylish Price Tag Molding on Each Shelf

Exterior

White, Black or Stainless Steel
1" Bumper
Choice of End Panels

Refrigeration

Expansion Valve System
Low Velocity Fans Located Below
Deck Area (to Insure Even Flow of Air)
Electronic Control System with
Automatic Air Defrost to Maintain
Balanced Temperatures
New High Efficiency Air Screen
Technology
Remotes Available



SC-OD35E-48-B-LED

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est Ship Wt
SC-OD35E-48-LED	Self contained	34.5"	48"	78.5"	115/208-230	13.0	3/4	L14-20P	965


Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel

Howard McCray




www.howardmccray.com

Howard McCray

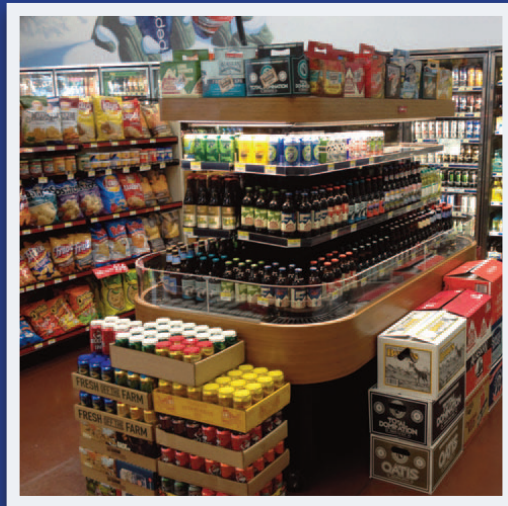

www.howardmccray.com

Howard McCray

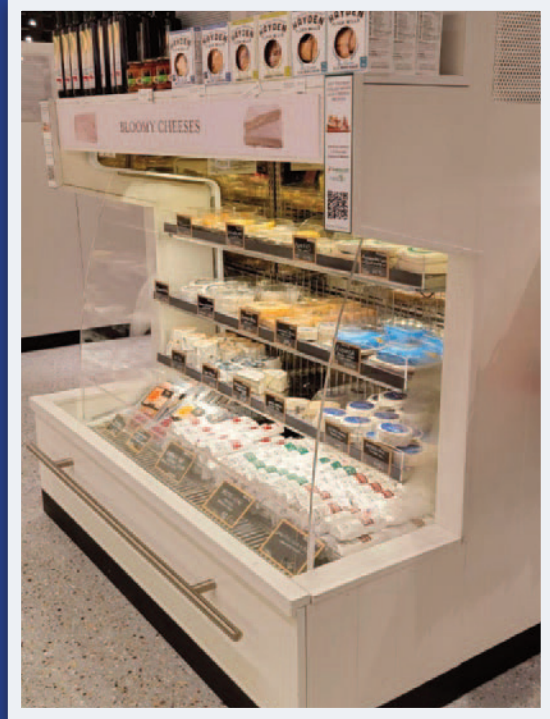

www.howardmccray.com

Howard McCray 831 East Cayuga Street, Philadelphia, PA 19124 • 1-800-344-8222