

Open Merchandisers

New Product

SC-OD40E-6S-B



SC-OD40E-6L-C-B



SC-OD40E-4L-B

40E-C – Multi Purpose 53" High Curved Glass and Solid Endless Design Same Capacity

Features

- Endless Design Allows for Line-Ups
- Stylish End Panel Designs
 - Solid End Panel is Designed to Line Up with 40E Curved Glass Service case Series
 - Solid End Panel for Endless Design or Stand Alone
 - Curved Plexi Ends for Endless Design or Stand Alone
 - 12" Canopy for more product display
- Choice of Colors –
 - Black, White or Stainless Steel (Depending on Model)
- Choice of End Trim Color –
 - Gray or Black
- Self Contained or Remote Refrigeration System

- New High Efficiency Air Screen Technology
- Electronic Control System with Automatic Defrost to Maintain Balanced Temperatures
- 2 Rows of LED Lit Shelves

Options

- Optional Glass Shelving in Place of Standard Shelving
- Optional Bumper Color and Sizes
- Exterior Custom Paints or Laminates

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|--------------------------|----------------|-------|--------|--------|-------------|------|-----|------------|-------------|
| SC-OD40E-3L-LED | Self contained | 40" | 39" | 53" | 115 | 14.0 | 1/2 | 5-20P | 655 |
| SC-OD40E-4L-LED | Self contained | 40" | 51" | 53" | 115 | 15.0 | 1/2 | 5-20P | 685 |
| SC-OD40E-6L-LED | Self contained | 40" | 75" | 53" | 115/208-230 | 16.0 | 3/4 | L14-20P | 850 |
| Curved Plexi Ends | | | | | | | | | |
| SC-OD40E-3L-C-LED | Self contained | 40" | 39" | 53" | 115 | 14.0 | 1/2 | 5-20P | 655 |
| SC-OD40E-4L-C-LED | Self contained | 40" | 51" | 53" | 115 | 15.0 | 1/2 | 5-20P | 685 |
| SC-OD40E-6L-C-LED | Self contained | 40" | 75" | 53" | 115/208-230 | 16.0 | 3/4 | L14-20P | 850 |

| Model No. | Description | Depth | Length | Height | Voltage | Amps | BTUs | Power Cord | Est Ship Wt |
|--------------------------|-------------|-------|--------|--------|---------|------|------|------------|-------------|
| R-OD40E-3L-LED | Remote | 40" | 39" | 53" | 115 | 2.0 | 3550 | No | 520 |
| R-OD40E-4L-LED | Remote | 40" | 51" | 53" | 115 | 3.0 | 4733 | No | 550 |
| R-OD40E-6L-LED | Remote | 40" | 75" | 53" | 115 | 4.0 | 7100 | No | 710 |
| Curved Plexi Ends | | | | | | | | | |
| R-OD40E-3L-C-LED | Remote | 40" | 39" | 53" | 115 | 2.0 | 3550 | No | 520 |
| R-OD40E-4L-C-LED | Remote | 40" | 51" | 53" | 115 | 3.0 | 4733 | No | 550 |
| R-OD40E-6L-C-LED | Remote | 40" | 75" | 53" | 115 | 4.0 | 7100 | No | 710 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel

MODEL NUMBER PREFIX: SC = Self Contained R = Remote
 MODEL NUMBER SUFFIX: B = Black SS = Stainless Steel
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.

- Specification subject to change without notice
- IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

REAR LOADING 30E & 35E Series Open Merchandisers.

Load from the Rear, not the front.

Designed for • Schools • Cafeterias • Convention Centers • Airports



New Product

MODEL NUMBER PREFIX: SC = Self Contained R = Remote
MODEL NUMBER SUFFIX: B = Black SS = Stainless Steel
• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.

- Specification subject to change without notice
- IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design

INTERIOR

- Black end panels
- Removable Black floor pans
- Black perforated rear wall for even air distribution (swing door only)
- Full length lighting at top of unit
- 3 or 4 levels of lit shelving
- 4 or 5 levels of product display
- Stylish tag molding on each shelf
- Mirrored customer view on slider models
- Sliding and Hinged Rear Access Doors
- Product stops on shelving

EXTERIOR

- Black ends and front and back
- Black rear doors (hinged units)
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels
- Laminate, and custom paints available

LIGHTING

- 1 row LED at inside top of unit
 - 3 or 4 rows of LED lit shelving
- ### ELECTRICAL REQUIREMENTS
- Cord and plug (self contained only)
 - UL/CUL listed
 - Mirrored customer view on slider models
 - Sliding and Hinged Rear Access Doors

REFRIGERATION

- Self Contained or Remote expansion valve systems
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology

OPTIONAL FEATURES

- Night covers
- Colored bumper
- Stainless steel, laminated or paint
- Product stops on shelving
- Digital thermometer
- Casters or legs
- Evaporator Pan

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP/BTUs | Power Cord | Est. Ship Weight |
|------------------|----------------|--------|--------|--------|-------------|------|---------|------------|------------------|
| SC-OD30E-3-B-SW | Self contained | 33.50" | 39.00" | 72.00" | 115 | 12.0 | 1/2 | 5-15P | 555 |
| SC-OD30E-4-B-SW | Self contained | 33.50" | 51.00" | 72.00" | 115 | 13.7 | 1/2 | 5-20P | 640 |
| SC-OD30E-4-B-SL | Self contained | 30.50" | 51.00" | 72.00" | 115 | 13.7 | 1/2 | 5-20P | 680 |
| SC-OD30E-5-B-SL | Self contained | 30.50" | 63.00" | 72.00" | 115/208-230 | 13.1 | 1 | L14-20P | 810 |
| SC-OD30E-6-B-SL | Self contained | 30.50" | 75.00" | 72.00" | 115/208-230 | 13.1 | 1 | L14-20P | 940 |
| R-OD30E-3-B-SW | Remote | 33.50" | 39.00" | 72.00" | 115 | 1.4 | 3900 | No | 500 |
| R-OD30E-4-B-SW | Remote | 33.50" | 51.00" | 72.00" | 115 | 2.2 | 5200 | No | 580 |
| R-OD30E-4-B-SL | Remote | 30.50" | 51.00" | 72.00" | 115 | 2.2 | 5200 | No | 620 |
| R-OD30E-5-B-SL | Remote | 30.50" | 63.00" | 72.00" | 115 | 2.8 | 6500 | No | 730 |
| R-OD30E-6-B-SL | Remote | 30.50" | 75.00" | 72.00" | 115 | 2.8 | 7800 | No | 865 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP/BTUs | Power Cord | Est. Ship Weight |
| SC-OD35E-3-B-SW | Self contained | 36.50" | 39.00" | 78.50" | 115 | 16.0 | 1/2 | 5-20P | 700 |
| SC-OD35E-4-B-SW | Self contained | 36.50" | 51.00" | 78.50" | 115 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-4-B-SL | Self contained | 34.50" | 51.00" | 78.50" | 115 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-5-B-SL | Self contained | 34.50" | 63.00" | 78.50" | 115/208-230 | 16.0 | 1 | L14-20P | 1175 |
| SC-OD35E-6-B-SL | Self contained | 34.50" | 75.00" | 78.50" | 115/208-230 | 16.0 | 1 | L14-20P | 1175 |
| R-OD35E-3-B-SW | Remote | 36.50" | 39.00" | 78.50" | 115 | 1.4 | 4906 | No | 575 |
| R-OD35E-4-B-SW | Remote | 36.50" | 51.00" | 78.50" | 115 | 2.2 | 6542 | No | 790 |
| R-OD35E-4-B-SL | Remote | 34.50" | 51.00" | 78.50" | 115 | 2.2 | 6542 | No | 790 |
| R-OD35E-5-B-SL | Remote | 34.50" | 63.00" | 78.50" | 115 | 2.8 | 8178 | No | 895 |
| R-OD35E-6-B-SL | Remote | 34.50" | 75.00" | 78.50" | 115 | 2.8 | 9813 | No | 895 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP/BTUs | Power Cord | Est. Ship Weight |
| SC-OD35E-3S-B-SW | Self contained | 36.50" | 39.00" | 78.50" | 115 | 16.0 | 1/2 | 5-20P | 700 |
| SC-OD35E-4S-B-SW | Self contained | 36.50" | 51.00" | 78.50" | 115/208-230 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-4S-B-SL | Self contained | 34.50" | 51.00" | 78.50" | 115/208-230 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-5S-B-SL | Self contained | 34.50" | 63.00" | 78.50" | 115/208-230 | 16.0 | 1 | L14-20P | 1125 |
| SC-OD35E-6S-B-SL | Self contained | 34.50" | 75.00" | 78.50" | 115/208-230 | 16.0 | 1 | L14-20P | 1155 |
| R-OD35E-3S-B-SW | Remote | 36.50" | 39.00" | 78.50" | 115 | 1.4 | 4906 | No | 575 |
| R-OD35E-4S-B-SW | Remote | 36.50" | 51.00" | 78.50" | 115 | 2.2 | 6542 | No | 790 |
| R-OD35E-4S-B-SL | Remote | 34.50" | 51.00" | 78.50" | 115 | 2.2 | 6542 | No | 790 |
| R-OD35E-5S-B-SL | Remote | 34.50" | 63.00" | 78.50" | 115 | 2.8 | 8178 | No | 915 |
| R-OD35E-6S-B-SL | Remote | 34.50" | 75.00" | 78.50" | 115 | 2.8 | 9813 | No | 1000 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel

Howard McCRAY Announces the New LOW-BASE 35E Open Merchandiser

Increase your display with our Low Base models.



SC-OD35E-6-LB-HB*



R-OP35E-4-LB-B*



R-OM35E-4-LB-B*



SC-OP35E-4L-LB-B*



R-OD35E-4-LB-B*

*ARTIST RENDERING

STANDARD FEATURES

- NEW lower base, maximizes display space
- Self contained and remote
- Black exterior and interior
- Heavy gauge steel super structure
- Multi deck
- Endless design
- 1" bumper
- LED Lit Shelving
- Full length lighting at top of unit
- Electronic control system to maintain balanced temperatures (SC)
- Tag molding on each shelf

- Unit comes with cord and plug (SC)
- UL/CUL listed
- Self Contained or Remote Refrigeration Systems
- HB (Hybrid) Model condensing unit ships separately, not installed.

OPTIONAL FEATURES

- Wide view curved plexi end panels
- Night covers
- Product stops on shelving
- Digital thermometer
- Condensate pan and pump kit separately, not installed.

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|---------------------------|----------------|--------|--------|--------|-------------|------|-------|------------|-------------|
| SC-OD35E-4L-LB-B | Self contained | 34.50" | 51.00" | 74.00" | 115/208-230 | 13.0 | 1/2 | L14-20P | 895 |
| R-OD35E-4L-LB-B | Remote | 34.50" | 51.00" | 60.00" | 115 | 3.0 | 4733 | No | 585 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| SC-OM35E-4L-LB-B | Self contained | 34.50" | 51.00" | 74.00" | 115/208-230 | 13.0 | 1/2 | L14-20P | 965 |
| R-OM35E-4L-LB-B | Remote | 34.50" | 51.00" | 60.00" | 115 | 3.0 | 4733 | No | 585 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| SC-OP35E-4L-LB-B | Self contained | 34.50" | 51.00" | 74.00" | 115/208-230 | 13.0 | 1/2 | L14-20P | 895 |
| R-OP35E-4L-LB-B | Remote | 34.50" | 51.00" | 60.00" | 115 | 3.0 | 4733 | No | 550 |
| Remote Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| R-OD35E-4-LB-B | Remote | 34.50" | 51.00" | 78.50" | 115 | 3.0 | 7238 | No | 790 |
| R-OD35E-6-LB-B | Remote | 34.50" | 75.00" | 78.50" | 115 | 4.0 | 10813 | No | 1040 |
| R-OD35E-8-LB-B | Remote | 34.50" | 99.00" | 78.50" | 115 | 6.0 | 14083 | No | 1580 |
| SC-OD35E-6-LB-HB (Hybrid) | Self Contained | 34.50" | 75.00" | 91.00" | 115/208-230 | 1/2 | 10813 | L14-20P | 1105 |
| Remote Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| R-OM35E-4-LB-B | Remote | 34.50" | 51.00" | 78.50" | 115 | 3.0 | 7238 | No | 831 |
| R-OM35E-6-LB-B | Remote | 34.50" | 75.00" | 78.50" | 115 | 4.0 | 10813 | No | 1040 |
| R-OM35E-8-LB-B | Remote | 34.50" | 99.00" | 78.50" | 115 | 4.0 | 14100 | No | 1580 |
| Remote Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| R-OP35E-4-LB-B | Remote | 34.50" | 51.00" | 78.50" | 115 | 3.0 | 7238 | No | 831 |
| R-OP35E-6-LB-B | Remote | 34.50" | 75.00" | 78.50" | 115 | 4.0 | 10813 | No | 1040 |
| R-OP35E-8-LB-B | Remote | 34.50" | 99.00" | 78.50" | 115 | 4.0 | 14100 | No | 1580 |

ISLAND CASE MERCHANDISER

Multi Purpose – 60"High

Features

- 3 Levels of Stainless Steel Shelving
- Shelves are Adjustable in 1" Increments
- Price Tag Molding
- LED Lit Top & 3 Shelves
- Electronically Controlled Refrigeration System
- Removable Deck Pans for Easy Access
- Black Interior And Exterior
- Black Laminated Top & Base
- Built In Product Stops at Deck Area
- All Steel Construction, Foamed in Place with CFC Free Foam
- Heavy Duty HP Condensing Unit (Self Contained Only)
- Electric Condensate Pan, Requires it's Own Receptacle
- Heavy Duty Plexiglas Front Rail
- Four Removable Bottom Grills for Easy Access
- Even Flo Air Discharge for Balanced Temperatures
- Night Covers

Options

- Optional Top Access Raceway (Electrical & Refrigeration Connections)
- Choice of Color On Interior – Stainless Steel
- Optional Laminates



| Model No. | Description | Depth | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|------------------|----------------------------|--------|--------|-------------|------|-------|------------|-------------|
| SC-OD421-5-S-LED | Self Contained-Island Case | 42.00" | 60.00" | 115/208-230 | 15 | 1 1/2 | L14-20P | 761 |
| SC-OD421-5-B-LED | Self Contained-Island Case | 42.00" | 60.00" | 115/208-230 | 15 | 1 1/2 | L14-20P | 680 |
| SC-OD421-7-B-LED | Self Contained-Island Case | 42.00" | 84.00" | 115/208-230 | 16 | 1 3/4 | L14-20P | 863 |
| SC-OD421-7-S-LED | Self Contained-Island Case | 42.00" | 84.00" | 115/208-230 | 16 | 1 3/4 | L14-20P | 944 |
| Model No. | Description | Depth | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| R-OD421-5-S-LED | Remote-Island Case | 42.00" | 60.00" | 115/208-230 | 7 | 11200 | No | 761 |
| R-OD421-5-B-LED | Remote-Island Case | 42.00" | 60.00" | 115/208-230 | 7 | 11200 | No | 680 |
| R-OD421-7-B-LED | Remote-Island Case | 42.00" | 84.00" | 115/208-230 | 8 | 13200 | No | 944 |
| R-OD421-7-S-LED | Remote-Island Case | 42.00" | 84.00" | 115/208-230 | 8 | 13200 | No | 863 |



SC-OD35E-33L 60"High, 34.5"Deep, 33.75"Length

Features

Interior

- White, Black, or Stainless Steel End Panels
- Removable White, Black, or Stainless Steel Floor Pans
- White, Black, or Stainless Steel Perforated Rear Wall (For Even Air Distribution)
- 2 Rows of LED Lit Shelving
- 3 Levels of Product Display
- Price Tag Molding on Each Shelf

Exterior

- Removeable Front Grill Allows for Cleaning And Servicing
- 1" Bumper
- Choice of End Panels
- Laminate, and Custom Paints Available

Refrigeration

- Expansion Valve System
- Low Velocity Fan Located Below Deck Area (to Insure Even Flow of Air)
- Electronic Control System with Automatic Air Defrost to Maintain Balanced Temperatures
- Remotes Available

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|--------------------|----------------|-------|--------|--------|---------|------|-----|------------|-------------|
| SC-OD35E-33L-B-LED | Self contained | 34.5" | 33.75 | 60" | 115 | 14 | 1/2 | 5-20P | 468 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel

GRAB-N-GO Open Merchandisers 44"High - Endless Design

Dairy, Deli, Multi-Purpose



SC-OS30E-4C-S-LED

SC-OS30E-4-B-LED



SC-OS35E-4-S-LED



SC-OS30E-4-LED
Shown with optional racks



Available in 30E & 35E Series

The 44" High x 30" or 34.5" Deep, Low Profile, Impulse Open Merchandisers, is an endless design with self-contained refrigeration, a removable step shelf, 1" high impact bumper, and your choice of designer white, glossy black aluminum or stainless steel exterior & interior.

Features

- Endless Design Allows for Line-Ups
- Choice of Colors – Black, White or Stainless Steel
- High Impact Bumper
- Choice of Straight or Curved Plexi Ends
- Self Contained or Remote Refrigeration Systems
- New High Efficiency Air Screen Technology
- Electronic Control System With Automatic Defrost to Maintain Balanced Temperatures
- Step Shelf Standard
- Condensate System
- Rear Protective Grille
- Night Cover

Options

- LED Lighting
- Shelving Packages
- Security Covers (Straight Plexi Only)
- Front Bumper, Color and Sizes
- Exterior Custom Paints or Laminates
- Balanced Temperatures
- Remotes Available

SC-OS30E-4C-S-LED

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|----------------|----------------|-------|--------|--------|---------|------|-----|------------|-------------|
| SC-OS30E-3-LED | Self contained | 30" | 39" | 44" | 115 | 12.0 | 1/2 | 5-15P | 445 |
| SC-OS30E-4-LED | Self contained | 30" | 51" | 44" | 115 | 13.1 | 1/2 | 5-20P | 475 |
| SC-OS30E-5-LED | Self contained | 30" | 63" | 44" | 115 | 16.0 | 3/4 | 5-20P | 500 |
| SC-OS30E-6-LED | Self contained | 30" | 75" | 44" | 115 | 16.0 | 3/4 | 5-20P | 525 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| SC-OS35E-3-LED | Self contained | 34.5" | 39" | 44" | 115 | 12.0 | 1/2 | 5-15P | 463 |
| SC-OS35E-4-LED | Self contained | 34.5" | 51" | 44" | 115 | 13.1 | 1/2 | 5-20P | 494 |
| SC-OS35E-5-LED | Self contained | 34.5" | 63" | 44" | 115 | 16.0 | 3/4 | 5-20P | 520 |
| SC-OS35E-6-LED | Self contained | 34.5" | 75" | 44" | 115 | 16.0 | 3/4 | 5-20P | 546 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number

30E Open Merchandisers 60" & 72" High Endless Design

Dairy, Packaged Meats, Produce
or Multi-Purpose

Features

Available for Dairy, Packaged Meats, Produce or Multi-Purpose
Endless Design Allows for Line-Ups
Choice of Colors – Black, White or Stainless Steel
Available in 60" and 72" Heights
2 Rows of LED Lit Shelves on 60" High - (Dairy & Meat Only)
3 Rows of LED Lit Shelves on 72" High - (Dairy & Meat Only)
15" Mirror with 1 Lit Shelf on Produce Case
Price Tag Molding on Shelves
Choice of Different Style 1½" Thick End Panels
– Curved Plexi, Straight Plexi or Solid
Self Contained or Remote Refrigeration System
New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost to Maintain
Balanced Temperatures
Drain Is Required

Options

Back-To-Back Island Option Available on 60" Units
Night and Security Covers Available
Front Bumper, Color and Sizes
Exterior Custom Paints or Laminates
Remotes Available



SC-OD30E-5L-S-LED



SC-OD30E-4L-LED



SC-OM30E-4L-B-LED



SC-OD30E-4-S-LED



SC-OD30E-4-LED

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|-----------------|----------------|-------|--------|--------|-------------|------|-----|------------|-------------|
| SC-OD30E-3L-LED | Self contained | 30" | 39" | 60" | 115 | 11.9 | 1/2 | 5-15P | 505 |
| SC-OD30E-4L-LED | Self contained | 30" | 51" | 60" | 115 | 12.6 | 1/2 | 5-20P | 585 |
| SC-OD30E-5L-LED | Self contained | 30" | 63" | 60" | 115/208-230 | 11.3 | 3/4 | L14-20P | 698 |
| SC-OD30E-6L-LED | Self contained | 30" | 75" | 60" | 115/208-230 | 11.3 | 3/4 | L14-20P | 810 |
| SC-OD30E-8L-LED | Self contained | 30" | 99" | 60" | 115/208-230 | 14.3 | 1 | L14-20P | 1035 |

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|----------------|----------------|-------|--------|--------|-------------|------|-----|------------|-------------|
| SC-OD30E-3-LED | Self contained | 30" | 39" | 72" | 115 | 12 | 1/2 | 5-15P | 535 |
| SC-OD30E-4-LED | Self contained | 30" | 51" | 72" | 115 | 13.7 | 1/2 | 5-20P | 615 |
| SC-OD30E-5-LED | Self contained | 30" | 63" | 72" | 115/208-230 | 13.1 | 1 | L14-20P | 738 |
| SC-OD30E-6-LED | Self contained | 30" | 75" | 72" | 115/208-230 | 13.1 | 1 | L14-20P | 860 |
| SC-OD30E-8-LED | Self contained | 30" | 99" | 72" | 115/208-230 | 14.3 | 1 | L14-20P | 1085 |

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|----------------|-------------|-------|--------|--------|---------|------|-------|------------|-------------|
| R-OD30E-3-LED | Remote | 30" | 39" | 72" | 115 | 1.4 | 3900 | No | 482 |
| R-OD30E-4-LED | Remote | 30" | 51" | 72" | 115 | 2.2 | 5200 | No | 554 |
| R-OD30E-5-LED | Remote | 30" | 63" | 72" | 115 | 2.8 | 6500 | No | 664 |
| R-OD30E-6-LED | Remote | 30" | 75" | 72" | 115 | 2.8 | 7800 | No | 774 |
| R-OD30E-8-LED | Remote | 30" | 99" | 72" | 115 | 4.3 | 10400 | No | 977 |
| R-OD30E-10-LED | Remote | 30" | 123" | 72" | 115 | 7.0 | 13000 | No | 1328 |
| R-OD30E-12-LED | Remote | 30" | 147" | 72" | 115 | 8.0 | 15600 | No | 1548 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number



SC-OM35E-4L-B-LED

35E Open Merchandisers, Endless Design

35E-L (low profile) 60" High

35E-S (sloped profile) 78.5" High

Features

- Available for Dairy, Packaged Meats, Produce or Multi-Purpose
- Endless Design Allows for Line-Ups
- Fits Through Most Doorways
- 2 Rows of LED Lit Shelves on 60"H (Dairy & Meat Only)
- 4 Rows of LED Lit Shelves on 78.5"H (Dairy & Meat Only)
- Price Tag Molding on Shelves
- 15" Mirror (with 1 lit shelf) on Produce Case
- Choice of Colors – Black, White or Stainless Steel
- Choice of 3 Different Style 1½" End Panels
 - Curved Plexi, Straight Plexi or Solid (60" High Units)
- Choice of 4 Different Style 1½" End Panels
 - Curved Plexi, Straight Plexi or Solid (78.5" High Units)
- Self Contained or Remote Refrigeration System
- New High Efficiency Air Screen Technology
- Electronic Control System With Automatic Defrost to Maintain Balanced Temperatures
- Drain is Required
- Exterior Custom Paints or Laminates

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|-----------------|----------------|-------|--------|--------|-------------|------|-------|------------|-------------|
| SC-OD35E-3L-LED | Self contained | 34.5" | 39" | 60" | 115 | 14.0 | 1/2 | 5-20P | 655 |
| SC-OD35E-4L-LED | Self contained | 34.5" | 51" | 60" | 115 | 15.0 | 1/2 | 5-20P | 685 |
| SC-OD35E-5L-LED | Self contained | 34.5" | 63" | 60" | 115/208-230 | 16.0 | 3/4 | L14-20P | 768 |
| SC-OD35E-6L-LED | Self contained | 34.5" | 75" | 60" | 115/208-230 | 16.0 | 3/4 | L14-20P | 850 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| R-OD35E-3L-LED | Remote | 34.5" | 39" | 60" | 115 | 2.0 | 3550 | No | 520 |
| R-OD35E-4L-LED | Remote | 34.5" | 51" | 60" | 115 | 3.0 | 4733 | No | 585 |
| R-OD35E-5L-LED | Remote | 34.5" | 63" | 60" | 115 | 4.0 | 5917 | No | 728 |
| R-OD35E-6L-LED | Remote | 34.5" | 75" | 60" | 115 | 4.0 | 7100 | No | 810 |
| R-OD35E-8L-LED | Remote | 34.5" | 99" | 60" | 115 | 6.0 | 9466 | No | 1080 |
| R-OD35E-10L-LED | Remote | 34.5" | 123" | 60" | 115 | 7.0 | 11833 | No | 1300 |
| R-OD35E-12L-LED | Remote | 34.5" | 147" | 60" | 115 | 8.0 | 14200 | No | 1560 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number





R-OD35E-8S-LAM-LED



SC-OP35E-6S-LED

Options

- Night and Security Covers
- Peg Bars
- Choice of End Panels
- Stainless Steel, Laminated or Paint
- Colored Bumpers

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|-----------------|----------------|-------|--------|--------|-------------|------|-------|------------|-------------|
| SC-OD35E-3S-LED | Self contained | 34.5" | 39" | 78.5" | 115 | 16.0 | 1/2 | 5-20P | 700 |
| SC-OD35E-4S-LED | Self contained | 34.5" | 51" | 78.5" | 115/208-230 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-5S-LED | Self contained | 34.5" | 63" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 1125 |
| SC-OD35E-6S-LED | Self contained | 34.5" | 75" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 1175 |
| SC-OD35E-8S-LED | Self contained | 36.5" | 99" | 78.5" | 115/208-230 | 16.0 | 1 1/4 | L14-20P | 1580 |

| Model No. | Description | Depth | Length | Height | Voltage | Amps | BTUs | Power Cord | Est Ship Wt |
|-----------------|-------------|-------|--------|--------|---------|------|-------|------------|-------------|
| R-OD35E-3S-LED | Remote | 34.5" | 39" | 78.5" | 115 | 2.0 | 4906 | No | 575 |
| R-OD35E-4S-LED | Remote | 34.5" | 51" | 78.5" | 115 | 3.0 | 6542 | No | 790 |
| R-OD35E-5S-LED | Remote | 34.5" | 63" | 78.5" | 115 | 4.0 | 8176 | No | 915 |
| R-OD35E-6S-LED | Remote | 34.5" | 75" | 78.5" | 115 | 4.0 | 9813 | No | 1000 |
| R-OD35E-8S-LED | Remote | 36.5" | 99" | 78.5" | 115 | 6.0 | 13084 | No | 1580 |
| R-OD35E-10S-LED | Remote | 36.5" | 123" | 78.5" | 115 | 7.0 | 16355 | No | 1790 |
| R-OD35E-12S-LED | Remote | 36.5" | 147" | 78.5" | 115 | 8.0 | 19626 | No | 2000 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number



35E – 78.5" & 82.25" High – Multi Purpose Endless Design

Features

- Multi-Purpose
- Endless Design Allows for Line-Ups
- Fits Through Most Doorways
- Choice of Colors – Black, White or Stainless
- 78.5" High - Choice Of 4 Different Style 1½" End Panels – Curved Plexi, Straight Plexi or Solid**
- 82.25" High - LED Lit Canopy - Stand Alone Case**
- Self Contained or Remote Refrigeration System
- New High Efficiency Air Screen Technology
- Electronic Control System with Automatic Defrost to Maintain Balanced Temperatures
- 4 Rows of LED Lit Shelves
- Drain is Required

Options

- Night and Security Covers Available
- Front Bumper, Color and Sizes
- Exterior Custom Paints or Laminates



SC-OD35E-3-B-LED



SC-OD35E-5-S-LED-LC

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|-------------------|----------------|-------|--------|--------|-------------|------|-------|------------|-------------|
| SC-OD35E-3-LED | Self contained | 34.5" | 39" | 78.5" | 115 | 16.0 | 1/2 | 5-20P | 700 |
| SC-OD35E-4-LED | Self contained | 34.5" | 51" | 78.5" | 115/208-230 | 13.0 | 3/4 | L14-20P | 965 |
| SC-OD35E-5-LED | Self contained | 34.5" | 63" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 1175 |
| SC-OD35E-6-LED | Self contained | 34.5" | 75" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 1175 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | BTUs | Power Cord | Est Ship Wt |
| R-OD35E-3-LED | Remote | 34.5" | 39" | 78.5" | 115 | 2.0 | 4906 | No | 575 |
| R-OD35E-4-LED | Remote | 34.5" | 51" | 78.5" | 115 | 3.0 | 6542 | No | 790 |
| R-OD35E-5-LED | Remote | 34.5" | 63" | 78.5" | 115 | 4.0 | 8178 | No | 895 |
| R-OD35E-6-LED | Remote | 34.5" | 75" | 78.5" | 115 | 4.0 | 9813 | No | 1000 |
| R-OD35E-8-LED | Remote | 36.5" | 99" | 78.5" | 115 | 6.0 | 13082 | No | 1580 |
| R-OD35E-10-LED | Remote | 36.5" | 123" | 78.5" | 115 | 7.0 | 16355 | No | 1790 |
| R-OD35E-12-LED | Remote | 36.5" | 147" | 78.5" | 115 | 8.0 | 19626 | No | 2000 |
| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
| SC-OD35E-3-LED-LC | Self contained | 34.5" | 39" | 82.25" | 115 | 16.0 | 1/2 | 5-20P | 710 |
| SC-OD35E-4-LED-LC | Self contained | 34.5" | 51" | 82.25" | 115/208-230 | 13.0 | 3/4 | L14-20P | 975 |
| SC-OD35E-5-LED-LC | Self contained | 34.5" | 63" | 82.25" | 115/208-230 | 16.0 | 1 | L14-20P | 975 |
| SC-OD35E-6-LED-LC | Self contained | 34.5" | 75" | 82.25" | 115/208-230 | 16.0 | 1 | L14-20P | 1185 |

Recommended Operation Conditions - 75°F @ 55% Relative Humidity

SC-OD35E-48-LED 35E Series

78.5"High, 34.5"Deep, 48"Wide Endless Design

Interior

White, Black or Stainless Steel
 Removable Floor Pans
 Black Rear Wall
 Full Length LED Lit Top
 4 Levels of LED Lit Shelving
 5 Levels of Product Display
 Stylish Price Tag Molding on Each Shelf

Exterior

White, Black or Stainless Steel
 1" Bumper
 Choice of End Panels

Refrigeration

Expansion Valve System
 Low Velocity Fans Located Below
 Deck Area (to Insure Even Flow of Air)
 Electronic Control System with
 Automatic Air Defrost to Maintain
 Balanced Temperatures
 New High Efficiency Air Screen
 Technology
 Remotes Available




SC-OD35E-48-B-LED

| Model No. | Description | Depth | Length | Height | Voltage | Amps | HP | Power Cord | Est Ship Wt |
|-----------------|----------------|-------|--------|--------|-------------|------|-----|------------|-------------|
| SC-OD35E-48-LED | Self contained | 34.5" | 48" | 78.5" | 115/208-230 | 13.0 | 3/4 | L14-20P | 965 |


Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel



Howard McCray

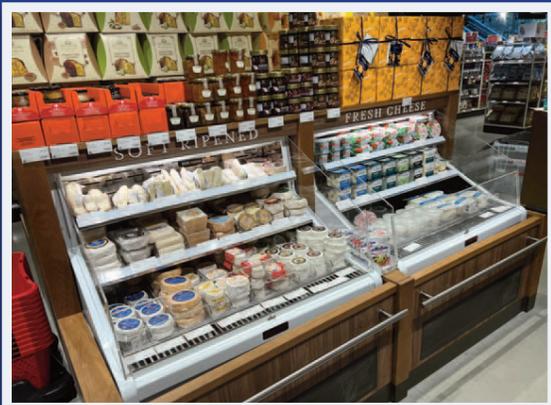

Howard McCray

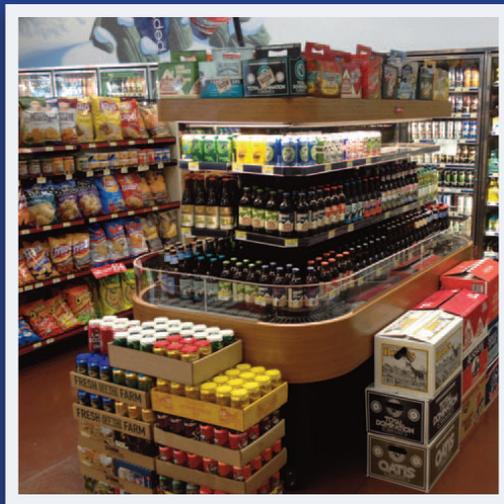

Howard McCray

