

32E SERIES

ENDLESS DESIGN - CURVED GLASS
SINGLE DUTY - DELI

Howard
McCray



SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-CDS32E-4C-LED	50"	30.421"	50.5"	115	12	1/4	5-15 P	500
SC-CDS32E-6C-LED	74"	30.421"	50.5"	115	12	1/3	5-15 P	710

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-CDS32E-4C-LED	50"	30.421"	50.5"	115	0.8	1400	NO	460
R-CDS32E-6C-LED	74"	30.421"	50.5"	115	1.6	2100	NO	660

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

If no color is specified, white is the default color

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com



32E SERIES

ENDLESS DESIGN - CURVED GLASS

SINGLE DUTY - DELI



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Stainless steel mirrored upper ends
- Stainless steel heavy gauge lighted mezzanine shelf (1 row)
- White aluminum floor-main deck shelf
- Air insulated baffle (prevents moisture from dripping into display area)

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Thermal insulated curved glass
- Heavy gauge steel super structure
- Single duty display
- Endless design allows for continuous line up
- Drain is included for cleaning

EXTERIOR

- Double pane rear removable doors
- Rear compression door jamb
- Removable front grille allows for cleaning
- Removable rear grille for easy servicing
- 1" Removable end panels
- 1" Front bumper

REFRIGERATION

Self contained:

- Copevap system (eliminates need for condensate pan)
- Automatic defrost electronically controlled

Remote:

- Solenoid valve (Required)
- Temp. control (Required)

Both:

- Gravity coil located at inside top of unit
- Electronic control maintains constant temperatures
- Humidity coil located at main deck (provides extra humidity)

LIGHTING

- 1 Rows of LED lighting at top of unit

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed
- 115V-5AMP General purpose receptacle

FINISHES

- White, black, and stainless steel front and ends
- Stainless steel mirror trim
- Stainless steel heavy gauge top - 16" W
- Rear of unit is stainless steel brush finish at top
- Bottom rear is designer white or glossy black

OPTIONAL ACCESSORIES

- ☐ Stainless steel main deck pans
- ☐ Stainless steel, laminate, or paint exterior
- ☐ Mirrored doors
- ☐ 1" Special color front bumper
- ☐ Complete stainless steel interior
- ☐ Stainless steel interior upper ends
- ☐ Solid doors
- ☐ Digital thermometer
- ☐ LED shelf lighting, up 2 rows
- ☐ Door locks
- ☐ Coated coil top
- ☐ Meat platters

32E SERIES

ENDLESS DESIGN - CURVED GLASS
SINGLE DUTY - DELI



TECHNICAL DATA

Model No.	SC (Self contained) R (Remote)	SC-CDS32E-4C-LED R-CDS32E-4C-LED	SC-CDS32E-6C-LED R-CDS32E-6C-LED
Length with (2) ends		50.5"	74"
Length without ends		48"	72"
Height with ends		50.5"	50.5"
Height without ends		50"	50"
Depth		30.423"	30.423"
Endless design (Dimensions are +/- 1/4")		YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/4	1/3
Defrost per day (24 hours)	Air Defrost	2 per day	2 per day
BTU's at +20°F Evap. Temp.	R	1400	2100
Voltage	SC	115	115
Amperage	SC	12	12
Remote Voltage	R	115	115
Amperage, lights only	R	0.8	1.6
Cord and plug	SC	5-15P	5-15P
Cord and plug	R	NO (hardwired)	NO (hardwired)
Exterior color		W, B, S	W, B, S
Interior color		W, S	W, S
# of top doors		2	2
Door size		20.8" x 23.5"	31.3" x 23.5"
# of coils		1	1
Bottom storage		NO	NO
Front glass size		29.8" x 46.6875"	29.8" x 70.6875"
# of main deck shelves		2	3
Main deck size		23.625" x 24"	23.625" x 24"
Mezzanine shelf, 1 row		47.00" x 12.00"	69.25" x 12.00"

ALL WHITE OR ALL BLACK, NO EXTRA CHARGE - IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice



32E SERIES


ENDLESS DESIGN - CURVED GLASS

SINGLE DUTY - DELI




DRAWINGS

SIDE VIEW

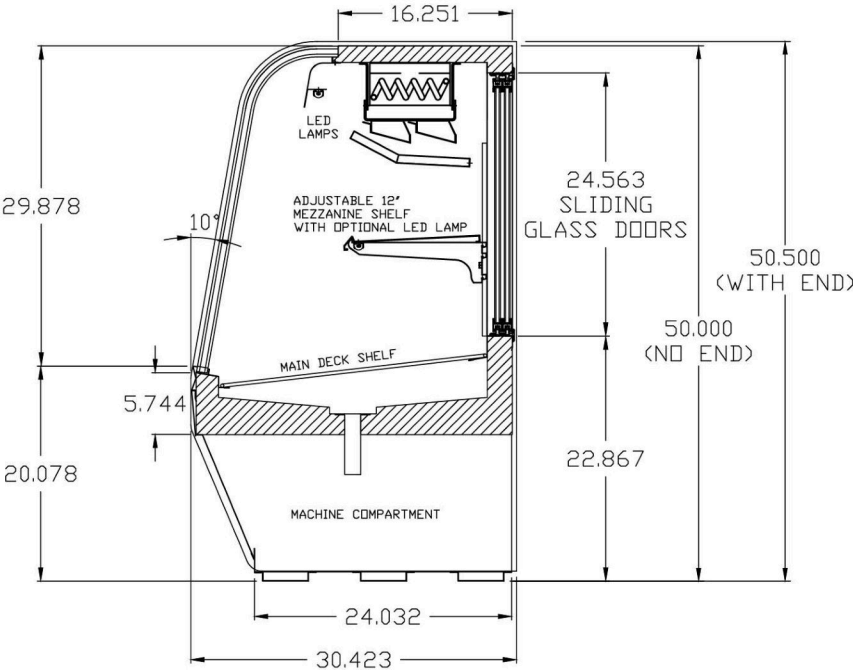


PLAN VIEW


4 FOOT CASE 50"

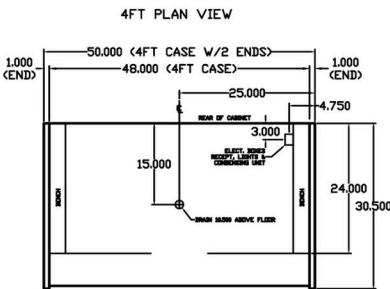


6 FOOT CASE 74"

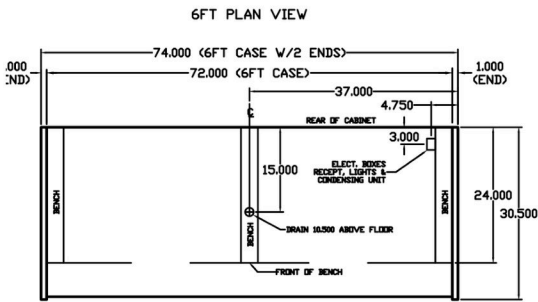

JUNCTION BOX

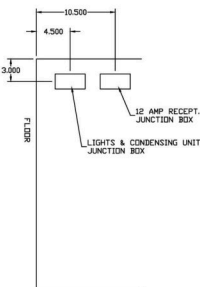

8 FOOT CASE 98"

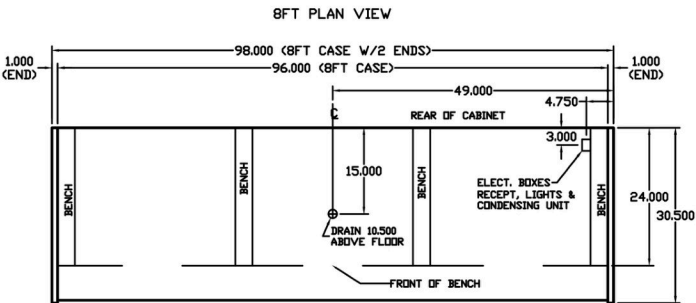

32E SERIES



ENDLESS DESIGN - CURVED GLASS
SINGLE DUTY - DELI





DRAWINGS

FRONT & BACK VIEW



SC-CDS,CMS,CFS32-4C



SC-CDS,CMS,CFS32-6C

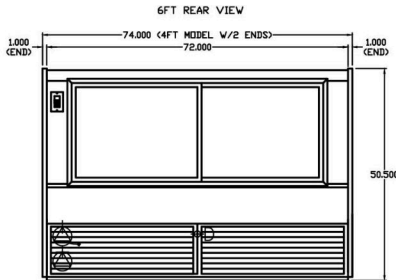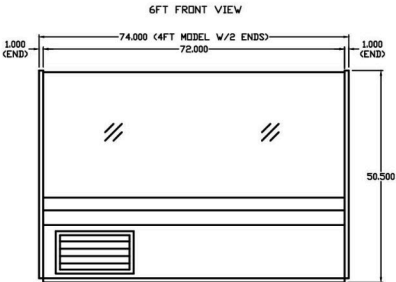

SC-CDS,CMS,CFS32-8C

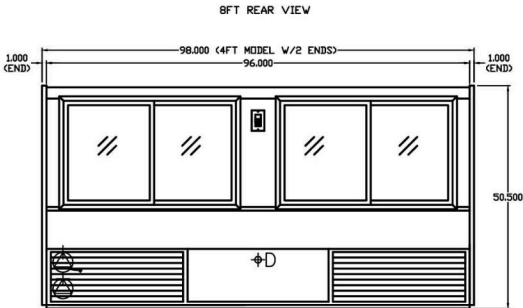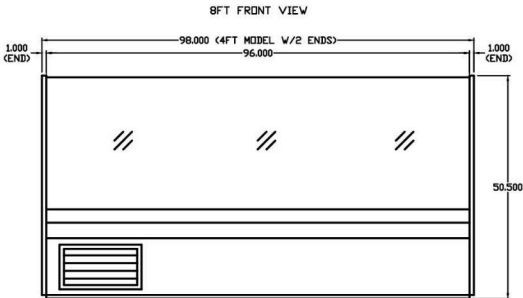

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

