

32E SERIES

ENDLESS DESIGN - SINGLE DUTY - RED MEAT

Howard
McCray



SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-CMS32E-4-LED	50"	30.5"	50.2"	115	12	1/4	5-15 P	446
SC-CMS32E-6-LED	74"	30.5"	50.2"	115	12	1/3	5-15 P	606
SC-CMS32E-8-LED	98"	30.5"	50.2"	115	16	1/2	5-20 P	755

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-CMS32E-4-LED	50"	30.5"	50.2"	115	0.8	1400	NO	408
R-CMS32E-6-LED	74"	30.5"	50.2"	115	1.6	2100	NO	564
R-CMS32E-8-LED	98"	30.5"	50.2"	115	1.6	2800	NO	697

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

If no color is specified, white is the default color

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com



32E SERIES

ENDLESS DESIGN - SINGLE DUTY - RED MEAT



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- White interior
- White and stainless steel ends
- Air insulated baffle (prevents moisture from dripping into display area)

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Thermal insulated front glass - 28" H
- Heavy gauge steel super structure
- Single duty display
- Endless design allows for continuous line up
- Drain is included for cleaning

EXTERIOR

- Double pane rear removable doors
- Removable front grille allows for cleaning
- Removable rear grille for easy servicing
- 1" Removable end panels
- 1" Front bumper

REFRIGERATION

Self contained:

- Copevap system (eliminates need for condensate pan)
- Automatic defrost electronically controlled

Remote:

- Solenoid value (Required)
- Temp. control (Required)

Both:

- Gravity coil located at inside top of unit
- Electronic control maintains constant temperatures
- Humidity coil located at main deck (provides extra humidity)

LIGHTING

- 2 Rows of LED lighting at top of unit

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed
- 115V-5AMP General purpose receptacle

FINISHES

- White, black, and stainless steel front and ends
- Stainless steel mirror trim
- Stainless steel heavy gauge top - 19.75" W
- Rear of unit is stainless steel brush finish at top
- Bottom rear is designer white or glossy black

OPTIONAL ACCESSORIES

- ☐ Door locks
- ☐ Stainless steel, laminate, or paint exterior
- ☐ Mirrored doors
- ☐ 1" Special color front bumper

- ☐ Scale stand with paper cutter
- ☐ Complete stainless steel interior
- ☐ Stainless steel interior upper ends
- ☐ Solid doors
- ☐ Digital thermometer

- ☐ Stainless steel main deck pans
- ☐ Mezzanine shelves (up to 2)
- ☐ Mezzanine lights with shelves
- ☐ Coated coil top/bottom
- ☐ Meat platters



32E SERIES

ENDLESS DESIGN - SINGLE DUTY - RED MEAT



TECHNICAL DATA

Model No.	SC (Self contained) R (Remote)	SC-CMS32E-4-LED R-CMS32E-4-LED	SC-CMS32E-6-LED R-CMS32E-6-LED	SC-CMS32E-8-LED R-CMS32E-8-LED
Length with (2) ends		50"	74"	98"
Length without ends		48"	72"	96"
Height with ends		50.2"	50.2"	50.2"
Height without ends		50"	50"	50"
Depth with ends		30.5"	30.5"	30.5"
Depth without ends		30"	30"	30"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/4	1/3	1/2
Defrost per day (24 hours)	Air Defrost	2 per day	2 per day	2 per day
BTU's at +20°F Evap. Temp.	R	1400	2100	2800
Voltage	SC	115	115	115
Amperage	SC	12	12	16
Remote Voltage	R	115	115	115
Amperage, lights only	R	0.8	1.6	1.6
Cord and plug	SC	5-15P	5-15P	5-20P
Cord and plug	R	NO (hardwired)	NO (hardwired)	NO (hardwired)
Exterior color		W, B, S	W, B, S	W, B, S
Interior color		W, S	W, S	W, S
# of top doors		2	2	4
Door size		20.8" x 23.5"	31.3" x 23.5"	20.8" x 23.5"
# of coils		1	1	1
Bottom storage		NO	NO	NO
Front glass size		28" x 46.6875"	28" x 70.6875"	28" x 94.6875"
# of main deck shelves		2	3	4
Main deck size		23.625" x 25"	23.625" x 25"	23.625" x 25"
Cubic capacity		23	34.5	46

ALL WHITE OR ALL BLACK, NO EXTRA CHARGE - IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
 - Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
 - Specification subject to change without notice




32E SERIES

ENDLESS DESIGN - SINGLE DUTY - RED MEAT




DRAWINGS

SIDE VIEW

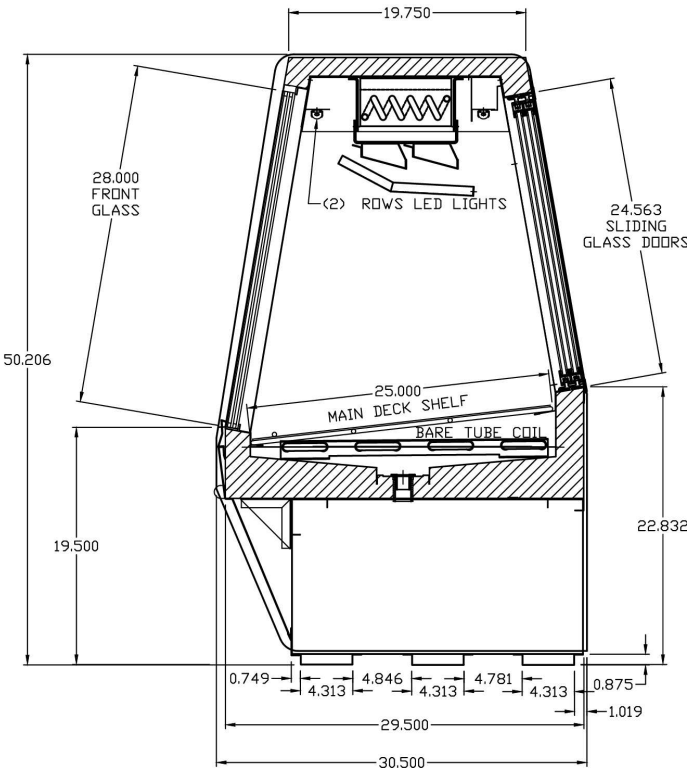


PLAN VIEW


4 FOOT CASE 50"

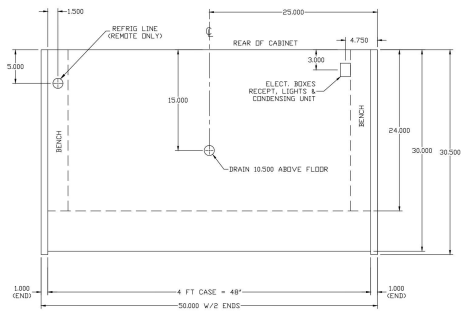


6 FOOT CASE 74"

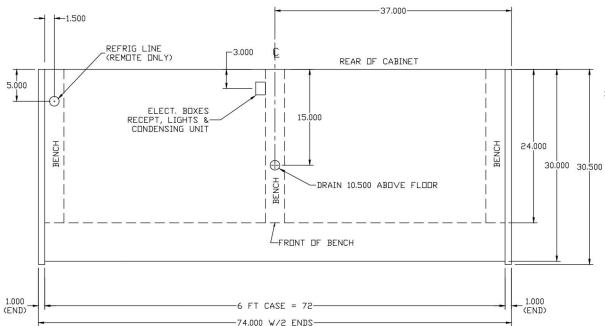

JUNCTION BOX

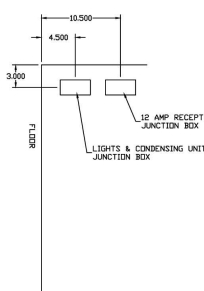

8 FOOT CASE 98"

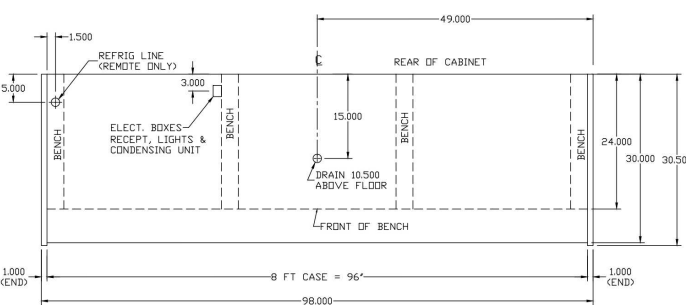

32E SERIES


ENDLESS DESIGN - SINGLE DUTY - RED MEAT




DRAWINGS

FRONT & BACK VIEW


SC-CDS,CMS,CFS32-4

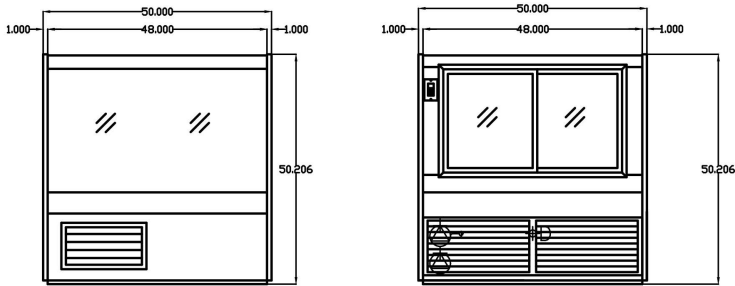

SC-CDS,CMS,CFS32-6

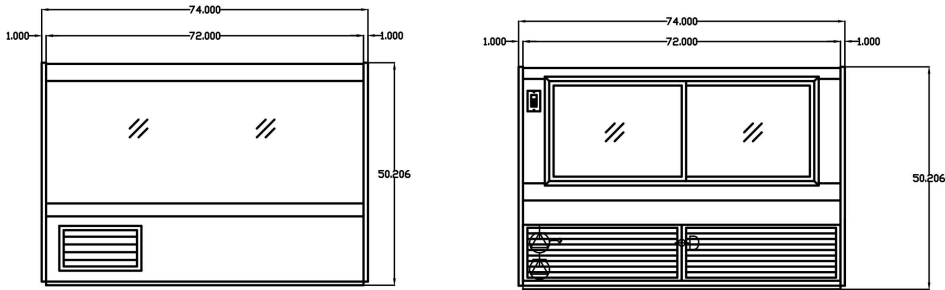

SC-CDS,CMS,CFS32-8

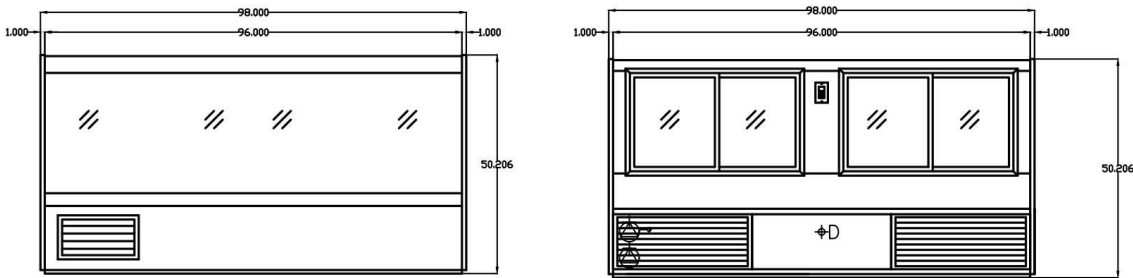

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

