

REACH-INS SERIES ★

Howard
McCray

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375" H



MODEL NO.	DESCRIPTION	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUS	POWER CORD	EST. SHIP WEIGHT
GR19BM	1 Door	26.5"	33.0"*	78.375"	115	10.2	1/3	5-15 P	330
GR42BM	2 Doors	52.25"	33.0"*	78.375"	115	11.9	1/3	5-15 P	520
GR65BM	3 Doors	78.0"	33.0"*	78.375"	115	13.4	1/2	5-20 P	720
GR88BM	4 Doors	103.75"	33.0"*	78.375"	115/208-230	6.40/7.10	3/4	L14-20 P	1074

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

*Depth without Handle

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com

REACH-INS SERIES



GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375"

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- White aluminum ends and rear (optional black and SS)
- White Aluminum floors (optional black and SS)
- Aluminum evaporator fan housing
- Aluminum evaporator fan housing
- 4 Heavy duty epoxy coated shelves per door

EXTERIOR

- White aluminum ends and front (optional black and SS)
- Triple pane glass doors 23-3/4" x 58-1/4"
- Doors - chrome finish (white and stainless steel)
- Doors - black finish (black)

LIGHTING

- Vertical LED light strips - standard
- 1 Dr = 2 LED light strips
- 2 Dr = 3 LED light strips
- 3 Dr = 4 LED light strips
- 4Dr = 5 LED light strips

REFRIGERATION

- Bottom mounted condensing unit
- Electronically controlled with audio alarm
- Automatic electric defrost
- ECM evaporator fan motors
- Condensate pan packed in case
- Remote: Solenoid valve (Required)
- Remote: Temp. control (Required)

CONSTRUCTION

- CUL/UL Classified to NSF/ANSI 7
- Heavy Duty Construction
- Foamed in place CFC free foam
- Removable front grille for easy servicing
- 1, 2, 3, 4 Door models available
- Heavy duty edge mounted hinges

ELECTRICAL REQUIREMENTS

- 10' Cord and plug
- (Self Contained only)
- CUL/UL listed
- 1, 2, 3 Door units 115V
- 4 Door units 115V/208-230V

OPTIONAL ACCESSORIES

- | | | |
|---|---|--|
| ☐ Door swing change (left or right) | ☐ Door locks | ☐ Digital thermometer |
| ☐ Custom, laminate, or paint interior and exterior | ☐ Extra cantilever shelves | ☐ Price tag molding |



REACH-INS SERIES



GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375"

TECHNICAL DATA

Model No.	SC (Self contained) R (Remote)	GR19BM R-GR19BM	GR42BM R-GR42BM	GR65BM R-GR65BM	GR88BM R-GR88BM
Length		26.5"	52.25"	78.0"	103.75"
Height		78.375"	78.375"	78.375"	78.375"
Depth without handle (Dimensions are +/- 1/4")		33.0"	33.0"	33.0"	33.0"
Operating temperature		35°F to 39°F	35°F to 39°F	35°F to 39°F	35°F to 39°F
System type		Expansion valve	Expansion valve	Expansion valve	Expansion valve
Compressor size HP	SC	1/3	1/3	1/2	3/4
Refrigration system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 2 per day	Electronic controlled 2 per day	Electronic controlled 2 per day	Electronic controlled 2 per day
BTU's at +20°F Evap. Temp.	R	1300	1900	2600	3000
Voltage	SC	115	115	115	115/208-230
Amperage	SC	10.2	11.9	13.4	6.40/7.10
Voltage	R	115	115	115	115
Amperage, lights, fans	R	2.6	3.4	4.1	6.4
Cord and plug	SC R	5-15P NO	5-15P NO	5-20P NO	L14-20P NO
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S
Doors size		(1) 23.75" x 58.25"	(2) 23.75" x 58.25"	(3) 23.75" x 58.25"	(3) 23.75" x 58.25"
Total shelves		4	8	12	16
Shelf size		(4) 21.25" x 22.5"	(8) 22.75" x 21.50"	(8) 22.75" x 21.50" (4) 25.00" x 21.50"	(8) 22.75" x 21.50" (8) 25.00" x 21.50"

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice



REACH-INS SERIES




GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375"


DRAWINGS

TOP VIEW


1 DOOR

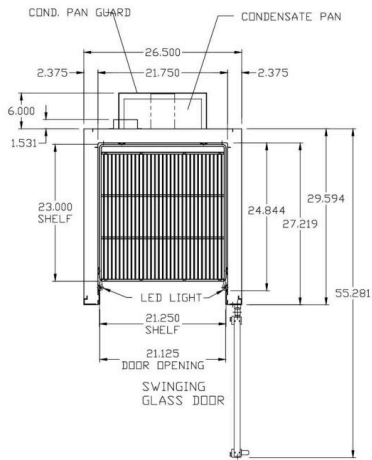


2 DOORS

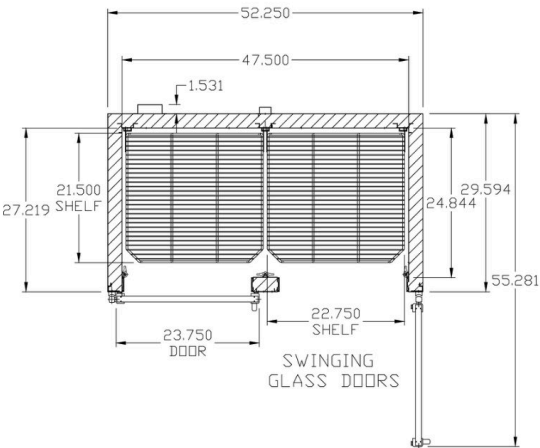

3 DOORS

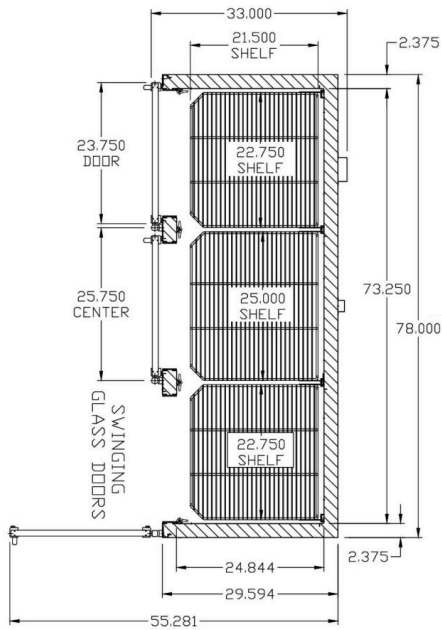

4 DOORS

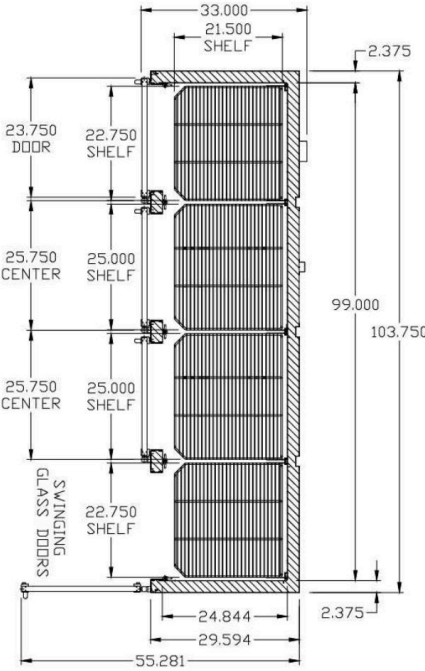

REACH-INS SERIES


GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375"




DRAWINGS

FRONT VIEW


SWINGING GLASS DOORS

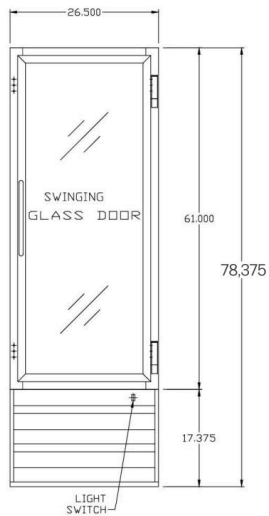


1 DOOR

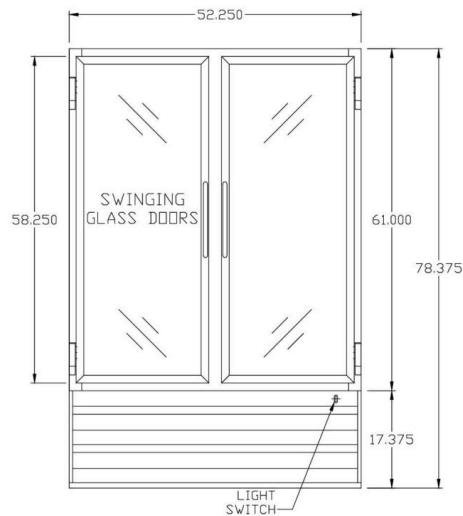

2 DOORS

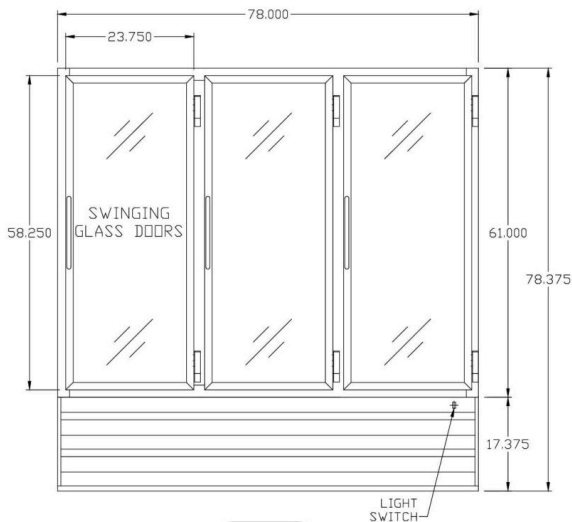


3 DOORS

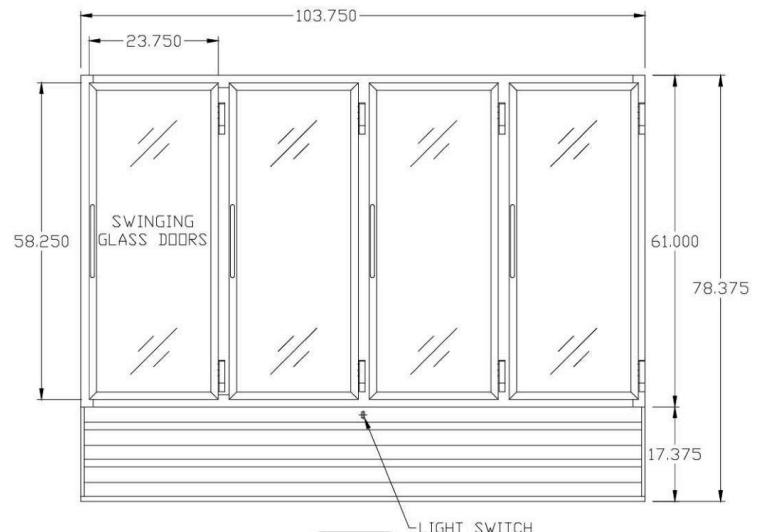

4 DOORS

SIDE VIEW

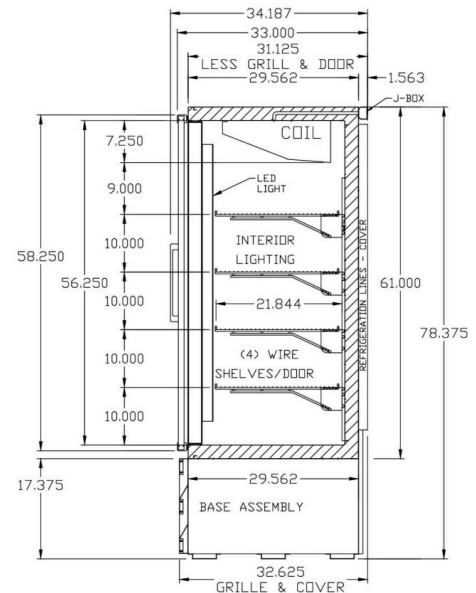

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

