

Open Merchandisers

Howard McCray



Chill With Confidence

2025



40E-C – Multi Purpose 53" High Curved Glass and Solid Endless Design Same Capacity 3 Different Designs

Features

- Endless Design Allows for Line-Ups
- 3 Stylish 1½" End Panel Designs
 - Solid End Panel is Designed to Line Up with 40E CurvedGlass Service case Series
 - Solid End Panel for Endless Design or Stand Alone
 - Curved Plexi Ends for Endless Design or Stand Alone
- Choice of Colors –
 - Black, White or Stainless Steel
- Choice of End Trim Color
 - Gray or Black
- Self Contained or Remote Refrigeration System

New High Efficiency Air Screen Technology

Electronic Control System with Automatic Defrost to Maintain Balanced Temperatures

2 Rows of LED Lit Shelves

Options

Various Shelving Packages Available

Optional Bumper Color and Sizes

Exterior Custom Paints or Laminates

Model No.	Description	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD40E-3L-LED	Self contained	40"	39"	115	14.0	1/2	5-20P	655
SC-OD40E-4L-LED	Self contained	40"	51"	115	15.0	1/2	5-20P	685
SC-OD40E-6L-LED	Self contained	40"	75"	115	16.0	3/4	L14-20P	850
Curved Plexi Ends								
SC-OD40E-3L-C-LED	Self contained	40"	39"	115	14.0	1/2	5-20P	655
SC-OD40E-4L-C-LED	Self contained	40"	51"	115	15.0	1/2	5-20P	685
SC-OD40E-6L-C-LED	Self contained	40"	75"	115/208-230	16.0	3/4	L14-20P	850

Model No.	Description	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD40E-3L-LED	Remote	40"	39"	115	2.0	3550	No	520
R-OD40E-4L-LED	Remote	40"	51"	115	3.0	4733	No	550
R-OD40E-6L-LED	Remote	40"	75"	115	4.0	7100	No	710
Curved Plexi Ends								
R-OD40E-3L-C-LED	Remote	40"	39"	115	2.0	3550	No	520
R-OD40E-4L-C-LED	Remote	40"	51"	115	3.0	4733	No	550
R-OD40E-6L-C-LED	Remote	40"	75"	115	4.0	7100	No	710

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel

MODEL NUMBER PREFIX: SC = Self Contained R = Remote

MODEL NUMBER SUFFIX: B = Black .SS = Stainless Steel

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.
- Specification subject to change without notice
- IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

NEW PRODUCT

NEW BY
**Howard
McCray**



SC-OD40E-6L-C-B




SC-OD40E-4L-B



SC-OD40E-4L-Laminated Line-up
Shown with optional glass shelves



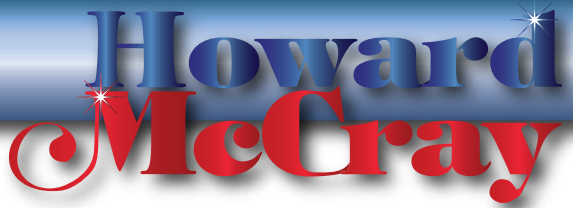

REAR LOADING 30E & 35E Series Open Merchandisers.

Load from the Rear, not the front.

Designed for • Schools • Cafeterias • Convention Centers • Airports •

NEW PRODUCT



SC-OD30E-4-B-SW*



MODEL NUMBER PREFIX: SC = Self Contained R = Remote

MODEL NUMBER SUFFIX: SW = Swinging Door, SL = Sliding Door

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity.
- Specification subject to change without notice

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



Open Merchandisers

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design

INTERIOR

- Black end panels
- Removable Black floor pans
- Black perforated rear wall for even air distribution (swing door only)
- Full length lighting at top of unit
- 3 or 4 levels of lit shelving
- 4 or 5 levels of product display
- Stylish tag molding on each shelf
- Mirrored customer view on slider models
- Sliding and Hinged Rear Access Doors

EXTERIOR

- Black ends and front and back
- Black rear doors (hinged units)
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels
- Laminate, and custom paints available

LIGHTING

- 1 row LED at inside top of unit
 - 3 or 4 rows of LED lit shelving
- ## ELECTRICAL REQUIREMENTS
- Unit comes with cord and plug
 - UL/CUL listed

REFRIGERATION

- Self Contained or Remote expansion valve systems
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology

OPTIONAL FEATURES

- Night covers
- Colored bumper
- Stainless steel, laminated or paint
- Product stops on shelving
- Digital thermometer
- Casters or legs
- Evaporator Pan

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OD30E-3-B-SW	Self Contained	39.00"	33.50"	72.00"	115	12.0	1/2	5-15P	555
SC-OD30E-4-B-SW	Self Contained	51.00"	33.50"	72.00"	115	13.7	1/2	5-20P	640
SC-OD30E-4-B-SL	Self Contained	51.00"	30.50"	72.00"	115	13.7	1/2	5-20P	680
SC-OD30E-5-B-SL	Self Contained	63.00"	30.50"	72.00"	115/208-230	13.1	1	L14-20P	810
SC-OD30E-6-B-SL	Self Contained	75.00"	30.50"	72.00"	115/208-230	13.1	1	L14-20P	940

R-OD30E-3-B-SW	Remote	39.00"	33.50"	72.00"	115	1.4	3900	NO	500
R-OD30E-4-B-SW	Remote	51.00"	33.50"	72.00"	115	2.2	5200	NO	580
R-OD30E-4-B-SL	Remote	51.00"	30.00"	72.00"	115	2.2	5200	NO	620
R-OD30E-5-B-SL	Remote	63.00"	30.00"	72.00"	115	2.8	6500	NO	730
R-OD30E-6-B-SL	Remote	75.00"	30.00"	72.00"	115	2.8	7800	NO	865

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OD35E-3-B-SW	Self Contained	39.00"	36.50"	78.50"	115	16.0	1/2	5-15P	700
SC-OD35E-4-B-SW	Self Contained	51.00"	36.50"	78.50"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-4-B-SL	Self Contained	51.00"	34.50"	78.50"	115/208-230	14.0	3/4	L14-20P	965
SC-OD35E-5-B-SL	Self Contained	63.00"	34.50"	78.50"	115/208-230	16.0	1	L14-20P	1175
SC-OD35E-6-B-SL	Self Contained	75.00"	34.50"	78.50"	115/208-230	16.0	1	L14-20P	1175

R-OD35E-3-B-SW	Remote	39.00"	36.50"	78.50"	115	1.4	4906	NO	575
R-OD35E-4-B-SW	Remote	51.00"	36.50"	78.50"	115	2.2	6542	NO	790
R-OD35E-4-B-SL	Remote	51.00"	34.50"	78.50"	115	2.2	6542	NO	790
R-OD35E-5-B-SL	Remote	63.00"	34.50"	78.50"	115	2.8	8178	NO	895
R-OD35E-6-B-SL	Remote	75.00"	34.50"	78.50"	115	2.8	9813	NO	895

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OD35E-3S-B-SW	Self Contained	39.00"	36.50"	78.50"	115	16.0	1/2	5-15P	700
SC-OD35E-4S-B-SW	Self Contained	51.00"	36.50"	78.50"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-4S-B-SL	Self Contained	51.00"	34.50"	78.50"	115/208-230	14.0	3/4	L14-20P	965
SC-OD35E-5S-B-SL	Self Contained	63.00"	34.50"	78.50"	115/208-230	16.0	1	L14-20P	1125
SC-OD35E-6S-B-SL	Self Contained	75.00"	34.50"	78.50"	115/208-230	16.0	1	L14-20P	1155

R-OD35E-3S-B-SW	Remote	39.00"	36.50"	78.50"	115	1.4	4906	NO	575
R-OD35E-4S-B-SW	Remote	51.00"	36.50"	78.50"	115	2.2	6542	NO	790
R-OD35E-4S-B-SL	Remote	51.00"	34.50"	78.50"	115	2.2	6542	NO	790
R-OD35E-5S-B-SL	Remote	63.00"	34.50"	78.50"	115	2.8	8178	NO	915
R-OD35E-6S-B-SL	Remote	75.00"	34.50"	78.50"	115	2.8	9813	NO	1000



Howard McCRAY Announces the New LOW-BASE 35E Open Merchandiser

Increase your display with our Low Base models.



SC-OD35E-6-LB-HB*



R-OM35E-4-LB-B*



R-OP35E-4-LB-B*



SC-OP35E-4L-LB-B*



R-OD35E-4-LB-B*

*ARTIST RENDERING

Open Merchandisers

STANDARD FEATURES

- NEW lower base, maximizes display space
- Self contained and remote
- Black exterior and interior
- Heavy gauge steel super structure
- Multi deck
- Endless design
- 1" bumper
- LED lighting
- Full length lighting at top of unit
- Electronic control system to maintain balanced temperatures (SC)
- Tag molding on each shelf

- Unit comes with cord and plug (SC)
- UL/CUL listed
- Self Contained or Remote Refrigeration Systems
- HB (Hybrid) Model condensing unit ships separately, not installed.

OPTIONAL FEATURES

- Wide view curved plexi end panels
- Night covers
- Product stops on shelving
- Digital thermometer
- Condensate pan and pump kit

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OD35E-4L-LB-B	Self Contained	51.00"	34.50"	74.00"	115/208-230	13.0	1/2	L14-20P	895
R-OD35E-4L-LB-B	Remote	51.00"	34.50"	60.00"	115	3.0	4733	No	585

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OM35E-4L-LB-B	Self Contained	51.00"	34.50"	74.00"	115/208-230	13.0	1/2	L14-20P	965
R-OM35E-4L-LB-B	Remote	51.00"	34.50"	60.00"	115	3.0	4733	No	585

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/ BTUs	Power Cord	Est. Ship Weight
SC-OP35E-4L-LB-B	Self Contained	51.00"	34.50"	74.00"	115/208-230	13.0	1/2	L14-20P	895
R-OP35E-4L-LB-B	Remote	51.00"	34.50"	60.00"	115	3.0	4733	No	550

Remote Model No.	Description	Length	Depth	Height	Voltage	Amps	BTUs	Power Cord	Est. Ship Weight
R-OD35E-4-LB-B	Remote	51.00"	34.50"	78.50"	115	3.0	7238	NO	790
R-OD35E-6-LB-B	Remote	75.00"	34.50"	78.50"	115	4.0	10813	NO	1040
R-OD35E-8-LB-B	Remote	99.00"	34.50"	78.50"	115	6.0	14083	NO	1580
SC-OD35E-6-LB-HB (Hybrid)	Self Contained	75.00"	34.50"	91.00"	115/208-230	16.0	1/2	L14-20P	1105

Remote Model No.	Description	Length	Depth	Height	Voltage	Amps	BTUs	Power Cord	Est. Ship Weight
R-OM35E-4-LB-B	Remote	51.00"	34.50"	78.50"	115	3.0	7238	NO	831
R-OM35E-6-LB-B	Remote	75.00"	34.50"	78.50"	115	4.0	10,813	NO	1040
R-OM35E-8-LB-B	Remote	99.00"	34.50"	78.50"	115	4.0	14100	NO	1580

Remote Model No.	Description	Length	Depth	Height	Voltage	Amps	BTUs	Power Cord	Est. Ship Weight
R-OP35E-4-LB-B	Remote	51.00"	34.50"	78.50"	115	3.0	7238	NO	831
R-OP35E-6-LB-B	Remote	75.00"	34.50"	78.50"	115	4.0	10,813	NO	1040
R-OP35E-8-LB-B	Remote	99.00"	34.50"	78.50"	115	4.0	14100	NO	1580

Recommended Operation Conditions - 75°F @ 55% Relative Humidity Add (-B) for Black or (-SS) for Stainless Steel



ISLAND CASE MERCHANDISER

Multi Purpose – 60" High

Features

- 3 Levels of Stainless Steel Shelving
- Shelves are Adjustable in 1" Increments
- Price Tag Molding
- LED Lit Top & 3 Shelves
- Electronically Controlled Refrigeration System
- Removable Deck Pans for Easy Access
- Black Interior And Exterior
- Black Laminated Top & Base
- Built In Product Stops at Deck Area
- All Steel Construction, Foamed in Place with CFC Free Foam
- Heavy Duty HP Condensing Unit
- Electric Condensate Pan, Separate Plug
- Heavy Duty Plexiglas Front Rail
- Four Removable Bottom Grills for Easy Access
- Even Flo Air Discharge for Balanced Temperatures
- Night Covers

Options

- Optional Top Access Raceway
(Electrical & Refrigeration Connections)
- Choice of Color On Interior – Stainless Steel
- Optional Laminates

Model No.	Description	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD42I-5-LED	Self Contained-Island Case	42.00"	60.00"	115/208-230	15	1 1/2	L14-20P	680
SC-OD42I-7-LED	Self Contained-Island Case	42.00"	84.00"	115/208-230	16	1 3/4	L14-20P	863

Model No.	Description	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD42I-5-LED	Remote-Island Case	42.00"	60.00"	115/208-230	7	11200	No	530
R-OD42I-7-LED	Remote-Island Case	42.00"	84.00"	115/208-230	8	13200	No	663

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel

Open Merchandisers

SC-OD35E-33L

60" High, 34.5" Deep, 33.75" Length

**Howard
McCray**



Features

Interior

White, Black, or Stainless Steel End Panels
Removable White, Black, or Stainless Steel Floor Pans
White, Black, or Stainless Steel Perforated
Rear Wall (For Even Air Distribution)
2 Rows of LED Lit Shelving
3 Levels of Product Display
Price Tag Molding on Each Shelf

Exterior

Removeable Front Grill Allows
for Cleaning And Servicing
1" Bumper
Choice of End Panels
Laminate, and Custom Paints
Available

Refrigeration

Expansion Valve System
Low Velocity Fan Located Below
Deck Area (to Insure Even Flow of Air)
Electronic Control System with
Automatic Air Defrost to Maintain
Balanced Temperatures
Remotes Available

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-33L-B-LED	Self contained	33.75	34.5"	60"	115	16.0	1/2	5-20P	700

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel



GRAB-N-GO Open Merchandisers 44" High -Endless Design

Dairy, Deli, Multi-Purpose



SC-OS35E-4C-S-LED



SC-OS30E-4-B-LED



SC-OS30E-4-LED
Shown with optional racks



SC-OS35E-4-S-LED

Open Merchandisers

Available in 30E & 35E Series

The 44" High x 30" or 34.5" Deep, Low Profile, Impulse Open Merchandisers, is an endless design with self-contained refrigeration, a removable step shelf, 1" high impact bumper, and your choice of designer white, glossy black aluminum or stainless steel exterior & interior.

Features

- Endless Design Allows for Line-Ups
- Choice of Colors – Black, White or Stainless Steel
- High Impact Bumper
- Choice of Straight or Curved Plexi Ends
- Self Contained or Remote Refrigeration Systems
- New High Efficiency Air Screen Technology
- Electronic Control System With Automatic Defrost to Maintain Balanced Temperatures
- Step Shelf Standard
- Condensate System
- Rear Protective Grille
- Night Cover

Options

- LED Lighting
- Shelving Packages
- Security Covers
- Front Bumper, Color and Sizes
- Exterior Custom Paints or Laminates



SC-OS30E-4C-S-LED

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OS30E-3-LED	Self contained	30"	39"	44"	115	12.0	1/2	5-15P	445
SC-OS30E-4-LED	Self contained	30"	51"	44"	115	13.1	1/2	5-20P	475
SC-OS30E-5-LED	Self contained	30"	63"	44"	115	16.0	3/4	5-20P	500
SC-OS30E-6-LED	Self contained	30"	75"	44"	115	16.0	3/4	5-20P	525

Model No.	Description	Depth	Length	Height	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OS35E-3-LED	Self Contained	34.5"	39"	44"	115	12.0	1/2	5-15P	463
SC-OS35E-4-LED	Self Contained	34.5"	51"	44"	115	13.1	1/2	5-20P	494
SC-OS35E-5-LED	Self Contained	34.5"	63"	44"	115	16.0	3/4	5-20P	520
SC-OS35E-6-LED	Self Contained	34.5"	75"	44"	115	16.0	3/4	5-20P	546

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel, (LED) for LED lit; to model number



SC-OD30E-5L-S-LED

30E Open Merchandisers 60" & 72" High Endless Design

Dairy, Packaged Meats, Produce
or Multi-Purpose

Features

Available for Dairy, Packaged Meats, Produce or Multi-Purpose
Endless Design Allows for Line-Ups
Choice of Colors – Black, White or Stainless Steel
Available in 60" and 72" Heights
2 Rows of LED Lit Shelves on 60" High
3 Rows of LED Lit Shelves on 72" High
15" Mirror with 1 Lit Shelf on Produce Case
Price Tag Molding on Shelves
Choice of Different Style 1½" Thick End Panels
– Curved Plexi, Straight Plexi or Solid
Self Contained or Remote Refrigeration System
New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost to Maintain
Balanced Temperatures
Drain Is Required

Options

Back-To-Back Island Option
Available on 60" Units
Night and Security Covers
Available
Front Bumper, Color and Sizes
Exterior Custom Paints or
Laminates
Remotes Available



SC-OD30E-4L-LED



SC-OD30E-4L-LED

Open Merchandisers



SC-OD30E-4-S-LED



SC-OD30E-4-LED

Model No.	Description	Height	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD30E-3L-LED	Self contained	60"	30"	39"	115	11.9	1/2	5-15P	505
SC-OD30E-4L-LED	Self contained	60"	30"	51"	115	12.6	1/2	5-20P	585
SC-OD30E-5L-LED	Self contained	60"	30"	63"	115/208-230	11.3	3/4	L14-20P	698
SC-OD30E-6L-LED	Self contained	60"	30"	75"	115/208-230	11.3	3/4	L14-20P	810
SC-OD30E-8L-LED	Self contained	60"	30"	99"	115/208-230	14.3	1	L14-20P	1035
Model No.	Description	Height	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD30E-3-LED	Self contained	72"	30"	39"	115	12	1/2	5-15P	535
SC-OD30E-4-LED	Self contained	72"	30"	51"	115	13.7	1/2	5-20P	615
SC-OD30E-5-LED	Self contained	72"	30"	63"	115/208-230	13.1	1	L14-20P	738
SC-OD30E-6-LED	Self contained	72"	30"	75"	115/208-230	13.1	1	L14-20P	860
SC-OD30E-8-LED	Self contained	72"	30"	99"	115/208-230	14.3	1	L14-20P	1085
Model No.	Description	Height	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD30E-3-LED	Remote	72"	30"	39"	115	1.4	3900	No	482
R-OD30E-4-LED	Remote	72"	30"	51"	115	2.2	5200	No	554
R-OD30E-5-LED	Remote	72"	30"	63"	115	2.8	6500	No	664
R-OD30E-6-LED	Remote	72"	30"	75"	115	2.8	7800	No	774
R-OD30E-8-LED	Remote	72"	30"	99"	115	4.3	8320	No	977
R-OD30E-10-LED	Remote	72"	30"	123"	115	7.0	10400	No	1328
R-OD30E-12-LED	Remote	72"	30"	147"	115	8.0	12480	No	1548

Recommended Operation Conditions - 75°F @ 55% Relative Humidity

Add (-B) for Black or (-SS) for Stainless Steel, OP30E - Produce model, OM30E - Packaged meat model





35E Open Merchandisers, Endless Design

35E-L (low profile) 60" High

35E-S (sloped profile) 78.5" High



SC-OM35E-4-B-LED

Features

Available for Dairy, Packaged Meats, Produce or Multi-Purpose
 Endless Design Allows for Line-Ups
 Fits Through Most Doorways
 2 Rows of LED Lit Shelves on 60" H
 4 Rows of LED Lit Shelves on 78.5" H
 Price Tag Molding on Shelves
 15" Mirror on Produce Case
 Choice of Colors – Black, White or Stainless Steel
 Choice of 3 Different Style 1½" End Panels
 – Curved Plexi, Straight Plexi or Solid (60" High Units)
 Choice of 4 Different Style 1½" End Panels
 – Curved Plexi, Straight Plexi or Solid (78.5" High Units)
 Self Contained or Remote Refrigeration System
 New High Efficiency Air Screen Technology
 Electronic Control System With Automatic Defrost to Maintain
 Balanced Temperatures
 Drain is Required
 Exterior Custom Paints or Laminates

Model No.	Description	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-3L-LED	Self contained	34.5"	39"	115	14.0	1/2	5-20P	655
SC-OD35E-4L-LED	Self contained	34.5"	51"	115	15.0	1/2	5-20P	685
SC-OD35E-5L-LED	Self contained	34.5"	63"	115/208-230	16.0	3/4	L14-20P	768
SC-OD35E-6L-LED	Self contained	34.5"	75"	115/208-230	16.0	3/4	L14-20P	850
Model No.	Description	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD35E-3-LED	Remote	34.5"	39"	115	2.0	3550	No	520
R-OD35E-4L-LED	Remote	34.5"	51"	115	3.0	4733	No	585
R-OD35E-5L-LED	Remote	34.5"	63"	115	4.0	5917	No	728
R-OD35E-6L-LED	Remote	34.5"	75"	115	4.0	7100	No	810
R-OD35E-8L-LED	Remote	34.5"	99"	115	6.0	9466	No	1080
R-OD35E-10L-LED	Remote	34.5"	123"	115	7.0	11833	No	1300
R-OD35E-12L-LED	Remote	34.5"	147"	115	8.0	14200	No	1560

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
 Add (-B) for Black or (-SS) for Stainless Steel, (OP35E - Produce model, OM35E - Packaged meat model

Open Merchandisers



R-OD35E-8S-LAM-LED

Options

Night and Security Covers
Peg Bars
Choice of End Panels
Stainless Steel, Laminated or Paint
Colored Bumpers



SC-OP35E-6S-LED

Model No.	Description	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-3S-LED	Self contained	34.5"	39"	115	16.0	1/2	5-20P	700
SC-OD35E-4S-LED	Self contained	34.5"	48"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-4S-LED	Self contained	34.5"	51"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-5S-LED	Self contained	34.5"	63"	115/208-230	15.0	1	L14-20P	1125
SC-OD35E-6S-LED	Self contained	34.5"	75"	115/208-230	16.0	1	L14-20P	1755
Model No.	Description	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD35E-3S-LED	Remote	34.5"	39"	115	2.0	4906	No	575
R-OD35E-4S-LED	Remote	34.5"	51"	115	3.0	6542	No	790
R-OD35E-5S-LED	Remote	34.5"	63"	115	4.0	7100	No	915
R-OD35E-6S-LED	Remote	34.5"	75"	115	4.0	9813	No	1000
R-OD35E-8S-LED	Remote	34.5"	99"	115	6.0	13084	No	1580
R-OD35E-10S-LED	Remote	34.5"	123"	115	7.0	16355	No	1790
R-OD35E-12S-LED	Remote	34.5"	147"	115	8.0	19626	No	2000

Recommended Operation Conditions - 75°F @ 55% Relative Humidity

Add (-B) for Black or (-SS) for Stainless Steel, OP35E - Produce model, OM35E - Packaged meat model





35E – 78.5" & 82.25" High - Multi Purpose Endless Design



SC-OD35E-5-S-LED-LC



SC-OD35E-3-S-LED

Features

Multi-Purpose
Endless Design Allows for Line-Ups
Fits Through Most Doorways
Choice of Colors – Black, White or Stainless
78.5" High - Choice Of 4 Different Style 1½" End Panels
– Curved Plexi, Straight Plexi or Solid
82.25" High - LED Lit Canopy - Stand Alone Case
Self Contained or Remote Refrigeration System
New High Efficiency Air Screen Technology
Electronic Control System with Automatic Defrost
to Maintain Balanced Temperatures
4 Rows of LED Lit Shelves with Product Stops
Drain is Required

Options

Night and Security Covers Available
Front Bumper, Color and Sizes
Exterior Custom Paints or Laminates
Roll Lock Cover on Solid End Units

Model No.	Description	Height	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-3-LED	Self contained	78.5"	34.5"	39"	115	16.0	1/2	5-20P	700
SC-OD35E-4-LED	Self contained	78.5"	34.5"	51"	115/208-230	13.0	3/4	L14-20P	965
SC-OD35E-5-LED	Self contained	78.5"	34.5"	63"	115/208-230	16.0	1	L14-20P	1175
SC-OD35E-6-LED	Self contained	78.5"	34.5"	75"	115/208-230	16.0	1	L14-20P	1175
Model No.	Description	Height	Depth	Length	Voltage	Amps	BTUs	Power Cord	Est. Ship Wt
R-OD35E-3-LED	Remote	78.5"	34.5"	39"	115	2.0	4906	No	575
R-OD35E-4-LED	Remote	78.5"	34.5"	51"	115	3.0	6542	No	790
R-OD35E-5-LED	Remote	78.5"	34.5"	63"	115	4.0	8178	No	895
R-OD35E-6-LED	Remote	78.5"	34.5"	75"	115	4.0	9813	No	1000
R-OD35E-8-LED	Remote	78.5"	36.5"	99"	115	6.0	13082	No	1580
R-OD35E-10-LED	Remote	78.5"	36.5"	123"	115	7.0	16355	No	1790
R-OD35E-12-LED	Remote	78.5"	36.5"	147"	115	8.0	19626	No	2000
Model No.	Description	Height	Depth	Length	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-3-LED-LC	Self contained	82.25	34.5"	39"	115	16.0	1/2	5-20P	710
SC-OD35E-4-LED-LC	Self contained	82.25	34.5"	51"	115/208-230	13.0	3/4	L14-20P	975
SC-OD35E-5-LED-LC	Self contained	82.25	34.5"	63"	115/208-230	16.0	1	L14-20P	975
SC-OD35E-6-LED-LC	Self contained	82.25	34.5"	75"	115/208-230	16.0	1	L14-20P	1185

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel,

Open Merchandisers

SC-OD35E-48-LED 35E Series

78.5" High, 34.5" Deep, 48" Wide Endless Design



Interior

White, Black or Stainless Steel

Removable Floor Pans

Black Rear Wall

Full Length LED Lit Top

3 Levels of LED Lit Shelving

4 Levels of Product Display

Full Length Mirror to Enhance
Product Display

Stylish Price Tag Molding on Each Shelf

Product Stop on Each Shelf

Exterior

White, Black or Stainless Steel

1" Bumper

Choice of End Panels

Refrigeration

Expansion Valve System

Low Velocity Fans Located Below
Deck Area (to Insure Even Flow of Air)

Electronic Control System with
Automatic Air Defrost to Maintain
Balanced Temperatures

New High Efficiency Air Screen
Technology

Remotes Available

Model No.	Description	Length	Depth	Height	Voltage	Amps	HP	Power Cord	Est. Ship Wt
SC-OD35E-48-LED	Self contained	48"	34.5"	78.5"	115/208-230	13.0	3/4	L14-20P	965

Recommended Operation Conditions - 75°F @ 55% Relative Humidity
Add (-B) for Black or (-SS) for Stainless Steel






INSTALLATIONS

**Howard
McCray**



Contact us at: sales@howardmccray.com • Website: www.HowardMcCray.com

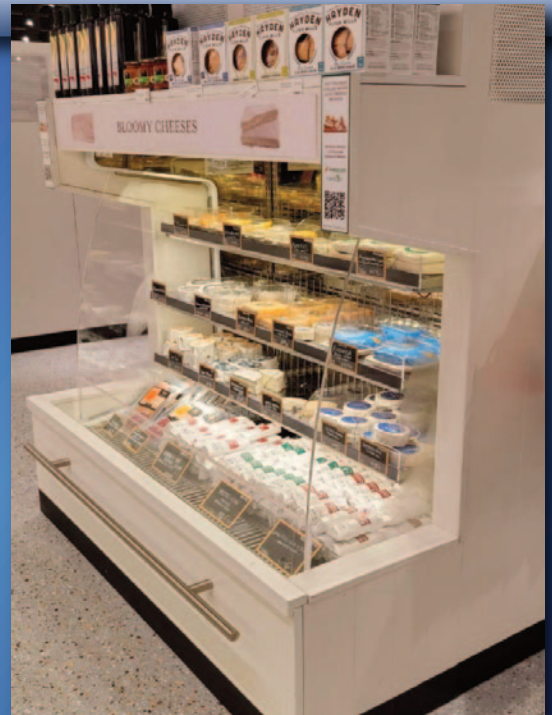

**Howard
McCray**

