

40E SERIES - HOT FOOD CASE



THIS HOT CASE IS MADE TO MATCH THE 40E SERIES SERVICE CASES

IMPORTANT NOTE:

Due to safety concerns - the end panels cannot be removed and this unit cannot be connected to any other 40E Series unit.

MODEL NO.	DESCRIPTION	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	POWER CORD	EST. SHIP WEIGHT
CHS40E-4	3 Wells	52.5"	39"	53"	120	4.4/11.6	NO	450
CHS40E-6	4 Wells	76.5"	39"	53"	120	5.8/17.6	NO	595
CHS40E-8	6 Wells	100.5"	39"	53"	120	8.7/23.1	NO	1025

MODEL NUMBER PREFIX - SC = Self Contained R = Remote
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
 • Cases are equipped with drains; check your local building codes for connection requirements.
 • Specification subject to change without notice
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800
 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

40E SERIES - HOT FOOD CASE

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

CONSTRUCTION

- Foamed in place CFC free foam
- Single pane tempered front safety glass
- Heavy gauge steel super structure
- ETL listed for safety and sanitation
- New extruded doors and door tracks

INTERIOR

- Stainless steel ends
- Stainless steel deck area around wells (for easy cleaning)
- 12x20 Wet or dry heated individual wells
- Individual thermostatically controlled wells
- Separate drain for each well
- Coated heat lamp over each well

EXTERIOR

- White, black, and stainless steel front and ends
- Stainless Steel exterior rear
- Stainless steel mirror trim
- Double pane rear removable doors
- Stainless steel heavy gauge top - 17" W
- Vented front minimizes moisture on glass
- 1" bumper

THIS HOT CASE IS MADE TO MATCH THE 40E SERIES SERVICE CASES**IMPORTANT NOTE:**

Due to safety concerns - the end panels cannot be removed nor can this be connected to any other 40E Series unit.

Electrical Requirements

Model No.	Wells	Volts	Phase	AMPS
CHS40E-4	3	120V/208V	1	4.4A/17.3A
		120V/240V	1	4.4A/20.0A
		120V/208V	3	4.4A/10.0A
		120V/240V	3	4.4A/11.6A
CHS40E-6	4	120V/208V	1	5.8A/23.1A
		120V/240V	1	5.0A/26.7A
		120V/208V	3	5.8A/15.3A
		120V/240V	3	5.8A/17.6A
CHS40E-8	6	120V/208V	1	8.7A/34.6A
		120V/240V	1	8.7A/40.0A
		120V/208V	3	8.7A/20.0A
		120V/240V	3	8.7A/23.1A

DRAIN IS REQUIRED



40E SERIES - HOT FOOD CASE



TECHNICAL DATA

Model No.	CHS40E-4	CHS40E-6	CHS40E-8
Length	52.5"	76.5"	100.5"
Height	53"	53"	53"
Depth	39"	39"	39"
# of wells (Dimensions are +/- 1/4")	3	4	6
Voltage - standard	120/240	120/240	120/240
Phase	3	3	3
Amperage	4.4/11.6	5.8/17.6	8.7/23.1
Voltage - optional	120/208	120/208	120/208
Phase	1	1	1
Amperage	4.4/17.3	5.8/23.1	8.7/34.6
Voltage - optional	120/240	120/240	120/240
Phase	1	1	1
Amperage	4.4/20.0	5.8/26.7	8.7/40.0
Voltage - optional	120/208	120/208	120/208
Phase	3	3	3
Amperage	4.4/10.0	5.8/15.3	8.7/20.0
Exterior color	W, B, S	W, B, S	W, B, S
Interior color	S	S	S
Floors	S	S	S
# of top rear doors	2	2	4
Front viewing area	19.75"	19.75"	19.75"
Bottom Storage	NO	NO	NO
Door size	20.8" x 23.5"	31.3" x 32.62"	20.8" x 23.5"
Shipping Info			
Height	63"	63"	63"
Depth	47"	47"	47"
Length	61"	87"	109"
Gross weight	450	596	1025
Cubic feet	90	128	164



40E SERIES - HOT FOOD CASE

DRAWINGS • SIDE VIEW • PLAN VIEW


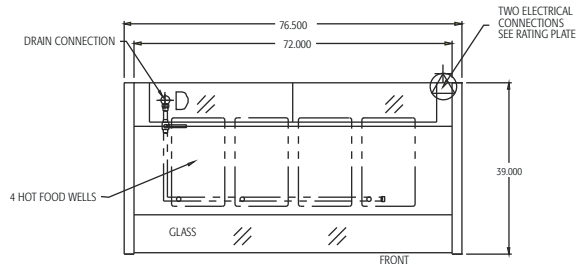


CHS40E-6

6' ELECTRICAL INFO

208/120V SINGLE PHASE 23.1/5.8 AMPS 30/15 FUSE
240/120V SINGLE PHASE 26.7/5.8 AMPS 35/15 FUSE

208/120V 3PHASE 15.3/5.8 AMPS 20/15 FUSE
240/120 3PHASE 17.6/5.8 AMPS 25/15 FUSE

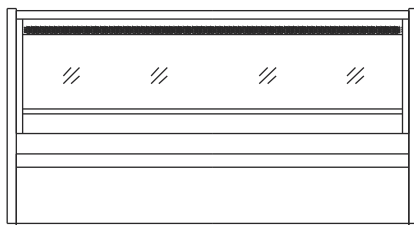
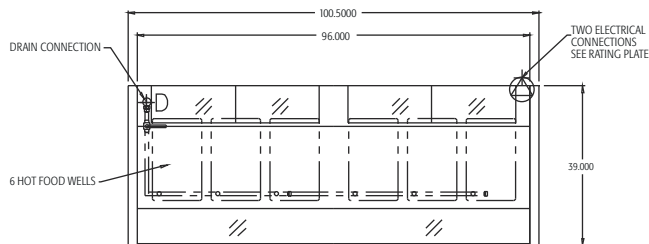


CHS40E-8

8' ELECTRICAL INFO

208/120V SINGLE PHASE 34.6/8.7 AMPS 40/15 FUSE
240/120V SINGLE PHASE 40.0/8.7 AMPS 50/15 FUSE

208/120V 3PHASE 20.0/8.7 AMPS 25/15 FUSE
240/120 3PHASE 23.1/8.7 AMPS 30/15 FUSE

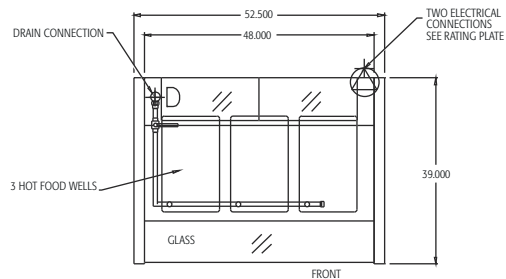

CHS40E-4

4' ELECTRICAL INFO

208/120V SINGLE PHASE 17.3/4.4 AMPS 25/15 FUSE
240/120V SINGLE PHASE 20.0/4.4 AMPS 25/15 FUSE

208/120V 3PHASE 10.0/4.4 AMPS 15/15 FUSE
240/120 3PHASE 11.6/4.4 AMPS 15/15 FUSE

