

35E SERIES ★

Howard
McCray

OPEN MERCHANDISERS - 78" HIGH
REAR LOADING - DAIRY



SLIDING REAR DOOR



SWINGING REAR DOOR



SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-OD35E-3S-B-SW	39"	38"	78"	115	16	1/2	5-20P	498
SC-OD35E-4S-B-SW	51"	38"	78"	115/208-230	13	3/4	L14-20P	630
SC-OD35E-4S-B-SL	51"	35"	78"	115/208-230	13	3/4	L14-20P	630
SC-OD35E-5S-B-SL	63"	35"	78"	115/208-230	16	1	L14-20P	686
SC-OD35E-6S-B-SL	75"	35"	78"	115/208-230	16	1	L14-20P	786

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-OD35E-3S-B-SW	39"	38"	78"	115	2.0	4906	NO	430
R-OD35E-4S-B-SW	51"	38"	78"	115	3.0	6542	NO	552
R-OD35E-4S-B-SL	51"	35"	78"	115	3.0	6542	NO	552
R-OD35E-5S-B-SL	63"	35"	78"	115	4.0	8178	NO	608
R-OD35E-6S-B-SL	75"	35"	78"	115	4.0	9813	NO	708

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

SL = Sliding Rear Door SW = Swinging Rear Door

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com



35E SERIES

OPEN MERCHANDISERS - 78" HIGH

REAR LOADING - ENDLESS DESIGN - DAIRY



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Removable black or stainless steel floor pans
- Black or stainless steel end panels
- Black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 4 levels of lighted shelving
- 5 levels of product display
- Price tag molding on each shelf

EXTERIOR

- Black or stainless steel ends and front and back
- Removable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Endless design allows for continuous line up

REFRIGERATION

Self contained:

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Copeland hermetic unit

Remote:

- Solenoid valve (Required)
- Temp. control (Required)

LIGHTING

- 1 row at inside top of unit
- 4 rows of lighted shelving

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed

FINISHES

- Black or stainless steel front rail
- Black or stainless steel end trim
- Laminate and custom paints available (additional charge)
- Black, or stainless steel end panels
- Black or stainless steel rear panels

OPTIONAL ACCESSORIES

- ☐ Extra row of shelves
- ☐ Night covers
- ☐ Casters - Legs
- ☐ Peg bars
- ☐ Plexiglas insulated divider for line ups
- ☐ Stainless steel, laminated or paint
- ☐ Product stops on shelving
- ☐ Digital thermometer
- ☐ Electric condensate pan
- ☐ Special color bumper

35E SERIES

OPEN MERCHANDISERS - 78" HIGH

REAR LOADING - ENDLESS DESIGN - DAIRY



TECHNICAL DATA

Model No.	SC R	SC-OD35E-3S-SW R-OD35E-3S-SW	SC-OD35E-4S-SW R-OD35E-4S-SW	SC-OD35E-4S-SL R-OD35E-4S-SL	SC-OD35E-5S-SL R-OD35E-5S-SL	SC-OD35E-6S-SL R-OD35E-6S-SL
Length with (2) ends		39"	51"	51"	63"	75"
Length without ends		36"	48"	48"	60"	72"
Height with ends		78"	78"	78"	78"	78"
Depth with ends		38"	38"	35"	35"	35"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES	YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/2	3/4	3/4	1	1
Refrigation system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day
BTU's at +20°F Evap. Temp.	R	4906	6542	6542	8178	9813
Voltage	SC	115	115/208-230	115/208-230	115/208-230	115/208-230
Amperage	SC	16	13	13	16	16
Voltage	R	115	115	115	115	115
Amperage, lights only	R	2.0	3.0	3.0	4.0	4.0
Cord and plug	SC R	5-20P N/A	L14-20P N/A	L14-20P N/A	L14-20P N/A	L14-20P N/A
Exterior color		B, S	B, S	B, S	B, S	B, S
Interior color		B, S	B, S	B, S	B, S	B, S
# of rows/ shelves		4/4	4/4	4/4	4/4	4/8
Shelf size		(1) 12" (2) 14" (1) 16"	(1) 12" (2) 14" (1) 16"	(1) 12" (2) 14" (1) 16"	(1) 12" (2) 14" (1) 16"	(2) 12" (4) 14" (2) 16"

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice




REAR LOADING - ENDLESS DESIGN - DAIRY




DRAWINGS

SIDE VIEW

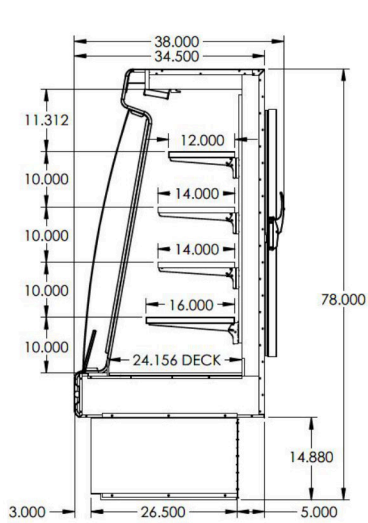


SWINGING DOOR

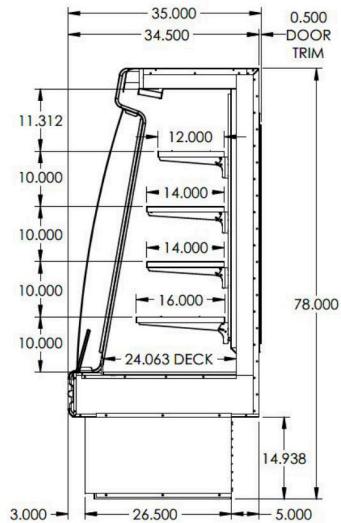


SLIDING DOOR


FRONT VIEW

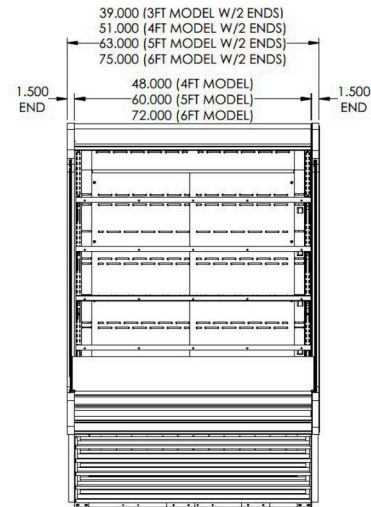

PLAN VIEW

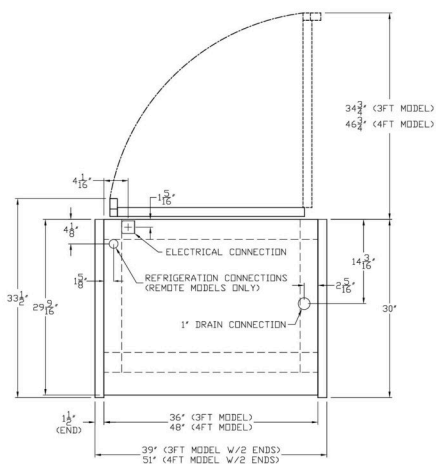

SWINGING DOOR

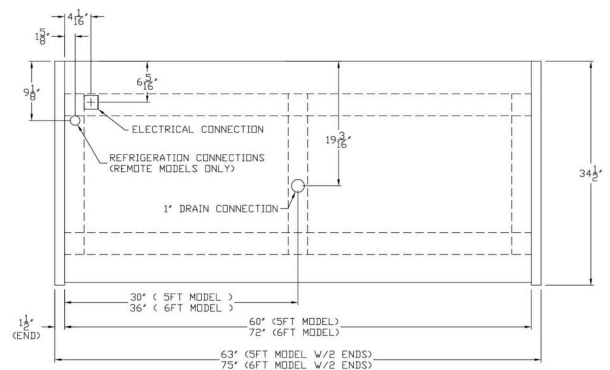

SLIDING DOOR

Data code: 09.2026

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

