

ISLAND SERIES ★

ISLAND MERCHANDISERS - 60" HIGH

Howard
McCray



SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-OD42I-5-B-LED	60"	42"	60"	115/208-230	16	1 1/2	L14-20P	652
SC-OD42I-5-S-LED	60"	42"	60"	115/208-230	16	1 1/2	L14-20P	716
SC-OD42I-7-B-LED	84"	42"	60"	115/208-230	16	1 3/4	L14-20P	860
SC-OD42I-7-S-LED	84"	42"	60"	115/208-230	16	1 3/4	L14-20P	944

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-OD42I-5-B-LED	60"	42"	60"	115/208-230	16	10200	Hardwired	549
R-OD42I-5-S-LED	60"	42"	60"	115/208-230	16	10200	Hardwired	613
R-OD42I-7-B-LED	84"	42"	60"	115/208-230	16	13200	Hardwired	747
R-OD42I-7-S-LED	84"	42"	60"	115/208-230	16	13200	Hardwired	831

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com



ISLAND SERIES

ISLAND MERCHANDISERS - 60" HIGH



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Removable deck pans for easy access
- Black or stainless steel end panels
- Black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 3 levels of lighted shelving
- 4 levels of product display
- Price tag molding on each shelf
- Heavy duty plexiglas front rail

EXTERIOR

- Black or stainless steel
- Removable front grill allows for cleaning and servicing
- Night cover only use at night & when premises is closed

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure

REFRIGERATION

- Electric condensate pan, separate plug
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Heavy duty condensing unit
- Remote: Solenoid valve (Required)
- Remote: Temp. control (Required)
- Only refrigerated products (34°F to 38°F) should be loaded into the unit

LIGHTING

- 1 row at inside top of unit
- 3 rows of lighted shelving

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed

FINISHES

- Black or stainless steel
- Laminate available

OPTIONAL ACCESSORIES

- ☐ Stainless steel, laminated
- ☐ 1" bumper
- ☐ Special color bumper
- ☐ Top access raceway for electric & refrigerators hook ups



ISLAND SERIES

ISLAND MERCHANDISERS - 60" HIGH



TECHNICAL DATA

Model No.	SC R	SC-OD42I-5-LED R-OD42I-5-LED	SC-OD42I-7-LED R-OD42I-7-LED
Length		60"	84"
Height		60"	60"
Depth		42"	42"
Operating temperature		36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1-1/2	1-3/4
Refrigation system		Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 6 per day	Electronic controlled 6 per day
BTU's at +20°F Evap. Temp.	R	10200	13200
Voltage	SC	115/208-230	115/208-230
Amperage	SC	16	16
Voltage	R	115/208-230	115/208-230
Amperage	R	16	16
Cord and plug	SC R	L14-20P N/A	L14-20P N/A
Exterior color		B, S	B, S
Interior color		B, S	B, S
# of rows/ shelves		3	3
Shelf size		6"	8"

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice



ISLAND SERIES


ISLAND MERCHANDISERS - 60" HIGH




DRAWINGS

FRONT VIEW

OD42I-5

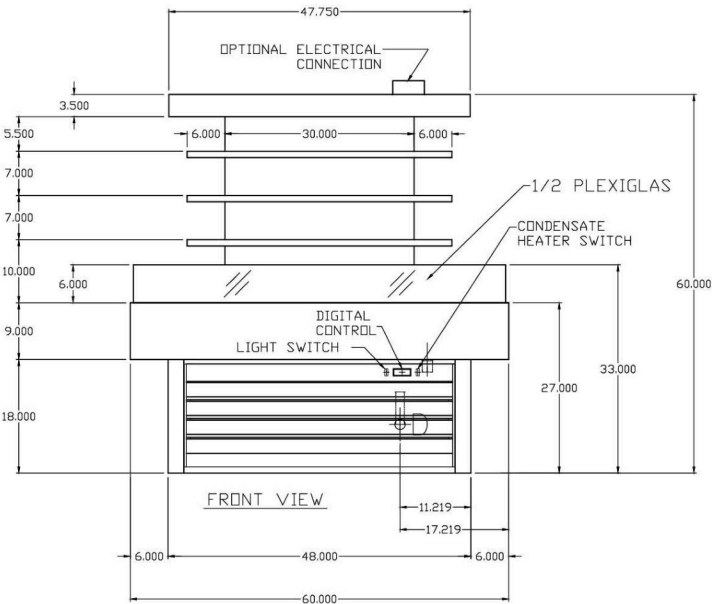

OD42I-7

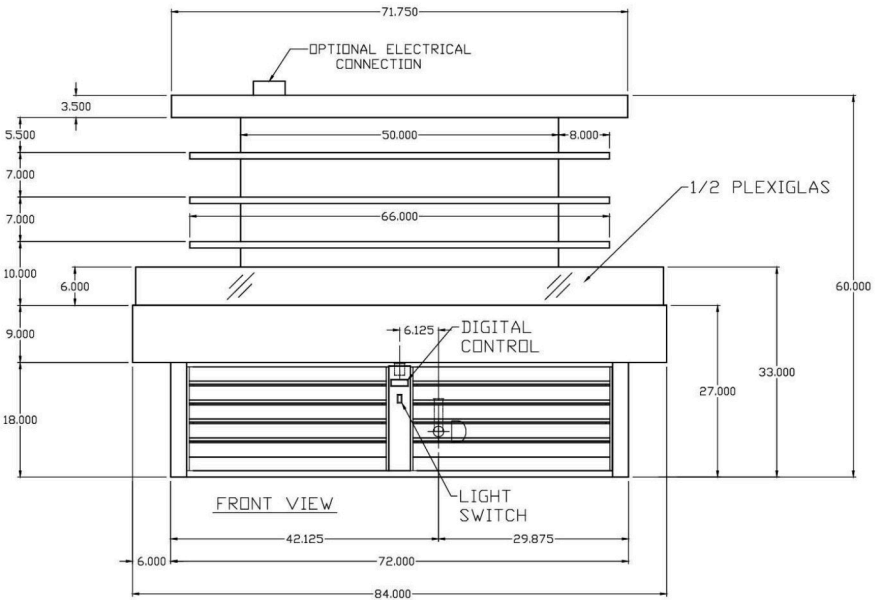


ISLAND SERIES

ISLAND MERCHANDISERS - 60" HIGH




SIDE VIEW

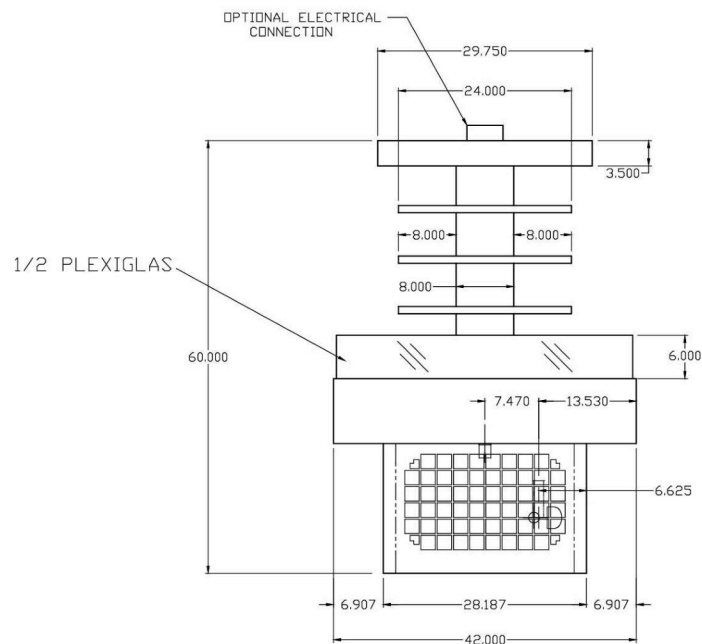


PLAN VIEW

OD42I-5

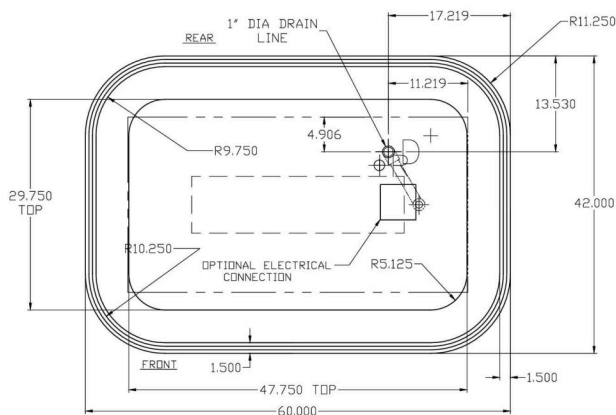

OD42I-7

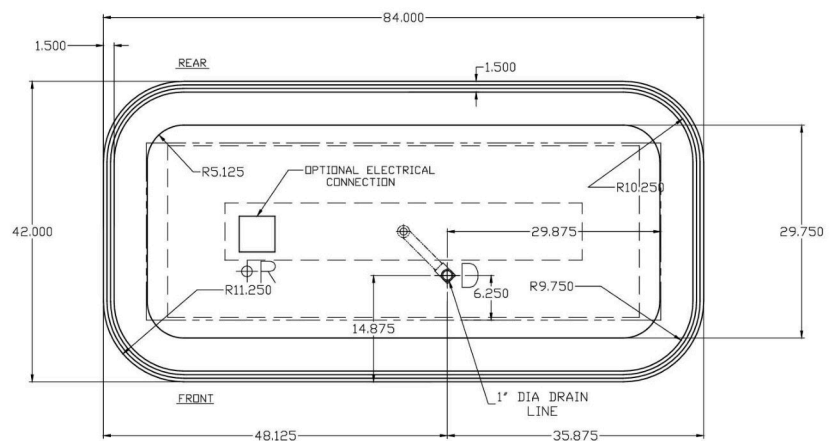

Data code: 09.2026

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

