# OPEN MERCHANDISERS
# 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT



| MODEL NO. | DESCRIPTION | LENGTH | DEPTH | HEIGHT | VOLTAGE | AMPS | HP/BTUS | POWER CORD | EST. SHIP WEIGHT |
|---|---|---|---|---|---|---|---|---|---|
| SC-OM35E-3S-LED | Self Contained | 39" | 34.5" | 78.5" | 115 | 16.0 | 1/2 | 5-20P | 498 |
| SC-OM35E-4S-LED | Self Contained | 51" | 34.5" | 78.5" | 115/208-230 | 13.0 | 3/4 | L14-20P | 578 |
| SC-OM35E-5S-LED | Self Contained | 63" | 34.5" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 668 |
| SC-OM35E-6S-LED | Self Contained | 75" | 34.5" | 78.5" | 115/208-230 | 16.0 | 1 | L14-20P | 776 |
| R-OM35E-3S-LED | Remote | 39" | 34.5" | 78.5" | 115 | 2.0 | 4906 | No | 575 |
| R-OM35E-4S-LED | Remote | 51" | 34.5" | 78.5" | 115 | 3.0 | 6542 | No | 790 |
| R-OM35E-5S-LED | Remote | 63" | 34.5" | 78.5" | 115 | 4.0 | 8176 | No | 895 |
| R-OM35E-6S-LED | Remote | 75" | 34.5" | 78.5" | 115 | 4.0 | 9813 | No | 1000 |
| R-OM35E-8S-LED | Remote | 99" | 36.5" | 78.5" | 115 | 6.0 | 13084 | No | 1580 |
| R-OM35E-10S-LED | Remote | 123" | 36.5" | 78.5" | 115 | 7.0 | 16355 | No | 1790 |
| R-OM35E-12S-LED | Remote | 147" | 36.5" | 78.5" | 115 | 8.0 | 19626 | No | 2000 |

**(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)**

| Prefix | Suffix |
|---|---|
| SC = Self Contained | B = Black |
| R = Remote | W = White |
| | S = Stainless Steel |
| | LED = LED lighting |

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800
1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

# OPEN MERCHANDISERS
# 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT

## STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

### CONSTRUCTION
- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

### INTERIOR
- White, black, or stainless steel end panels
- Removable white, black, or stainless steel floor pans
- White, black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 4 levels of lighted shelving
- 5 levels of product display
- Stylish price tag molding on each shelf
- 3" Product stop on each shelf

### EXTERIOR
- White, black, or stainless steel ends and front
- Removeable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels

### FINISHES
- White, black, or stainless steel front rail
- White, black, or stainless steel end trim
- Laminate, and custom paints available
- Coated galvanized rear
- White, black, or stainless steel end panels
- White, black, or stainless steel rear panels

**IMPORTANT NOTE:**

**ALL REFRIGERATED CASES ARE DESIGNED TO OPERATE IN AN ENVIRONMENT OF 75 DEGREES AND 55% RELATIVE HUMIDITY.**

**PRODUCT MUST BE COOLED BEFORE BEING DISPLAYED WITHIN THE CASE.**


**DRAIN IS REQUIRED**

### LIGHTING
- 1 row at inside top of unit
- 4 rows of lighted shelving

### ELECTRICAL REQUIREMENTS
- Self contained unit comes with cord and plug
- UL/CUL listed
- See Tech page for details on voltage

### REFRIGERATION
- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remotes available

### OPTIONAL FEATURES
- Solid state lighting
- Night covers
- Security cover
- Peg bars
- Insulated divider for line ups
- Plexiglas divider for line ups
- Stainless steel, laminated or paint
- 3 different end panel choices
- Digital thermometer

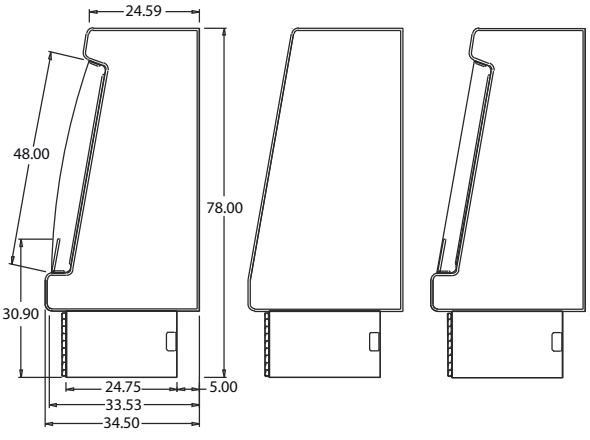


STANDARD 35ES-SOLID 35ES-4PLX

Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800
1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

# OPEN MERCHANDISERS
# 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT

## TECHNICAL DATA


| MODEL NO. | SC<br>R | SC-OM35E-3S-LED<br>R-OM35E-3S-LED | SC-OM35E-4S-LED<br>R-OM35E-4S-LED | SC-OM35E-5S-LED<br>R-OM35E-5S-LED | SC-OM35E-6S-LED<br>R-OM35E-6S-LED | R-OM35E-8S-LED | R-OM35E-10S-LED | R-OM35E-12S-LED |
|---|---|---|---|---|---|---|---|---|
| Length with (2) ends | | 39" | 51" | 63" | 75" | 99" | 123" | 147" |
| Length without ends | | 36" | 48" | 60" | 72" | 96" | 120" | 144" |
| Height with ends | | 78.5" | 78.5" | 78.5" | 78.5" | 78.5" | 78.5" | 78.5" |
| Height without ends | | 78" | 78" | 78" | 78" | 79.5" | 79.5" | 79.5" |
| Depth with ends | | 34.5" | 34.5" | 34.5" | 34.5" | 35.25" | 35.25" | 35.25" |
| Depth without ends | | 34" | 34" | 34" | 34" | 35.25" | 35.25" | 35.25" |
| Endless design | | YES | YES | YES | YES | YES | YES | YES |
| (Dimensions are +/- 1/4") | | | | | | | | |
| Operating temperature | | 34°F to 38°F | 34°F to 38°F | 34°F to 38°F | 34°F to 38°F | 34°F to 38°F | 34°F to 38°F | 34°F to 38°F |
| Compressor size HP | SC | 1/2 | 3/4 | 1 | 1 | N/A | N/A | N/A |
| Defrost per day (24 hours) | Air Defrost | 6 per day. | 6 per day. | 6 per day | 6 per day | 6 per day | 6 per day | 6 per day |
| BTU's at +20°F Evap. Temp. | R | 4906 | 6542 | 8177 | 9813 | 13100 | 16353 | 19626 |
| Voltage | SC | 115 | 115/208-230 | 115/208-230 | 115/208-230 | | | |
| Amperage | SC | 16.0 | 13.0 | 16.0 | 16.0 | | | |
| Remote Voltage | R | 115 | 115 | 115 | 115 | 115 | 115 | 115 |
| Amperage, lights only | R | 2.0 | 3.0 | 4.0 | 4.0 | 6.0 | 7.0 | 8.0 |
| Cord and plug | SC | 5-20P | L14-20P | L14-20P | L14-20P | | | |
| | R | NO | NO | NO | NO | NO | NO | NO |
| Exterior color | | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S |
| Interior color | | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S | W, B, S |
| # of rows / shelves | | 4/4 | 4/4 | 4/4 | 4/8 | 4/8 | 4/12 | 4/12 |
| Shelf Size | | (1) 14", (1) 16" | (1) 14", (1) 16" | (1) 14", (1) 16" | (2) 14", (2) 16" | (2) 14", (2) 16" | (3) 14", (3) 16" | (4) 14", (4) 16" |
| | | (2) 18" | (2) 18" | (2) 18" | (4) 18" | 4) 18" | (6) 18" | (8) 18" |
| Shipping Info | | | | | | | | |
| Height | | 86" | 86" | 86" | 86" | 86" | 86" | 86" |
| Depth | | 44" | 44" | 44" | 44" | 44" | 44" | 44" |
| Length | | 61" | 61" | 72" | 86" | 109 | 135 | 157 |
| Gross weight (SC/R) | | 700/575 | 965/790 | 1070/895 | 1175/1000 | 1580 | 1790 | 2000 |
| Cubic feet | | 100 | 130 | Call for Info | 184 | 233 | 288 | 336 |

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

# OPEN MERCHANDISERS
# 35E SERIES – SLOPED – 78.5"H – ENDLESS DESIGN - MEAT


## DRAWINGS • SIDE VIEW • PLAN VIEWS

SIDE VIEW

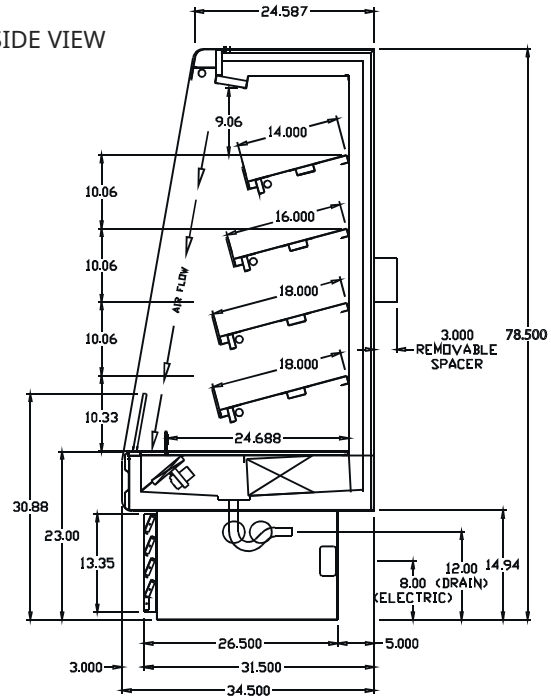



FLOOR PLAN VIEWS


8' PLAN VIEW

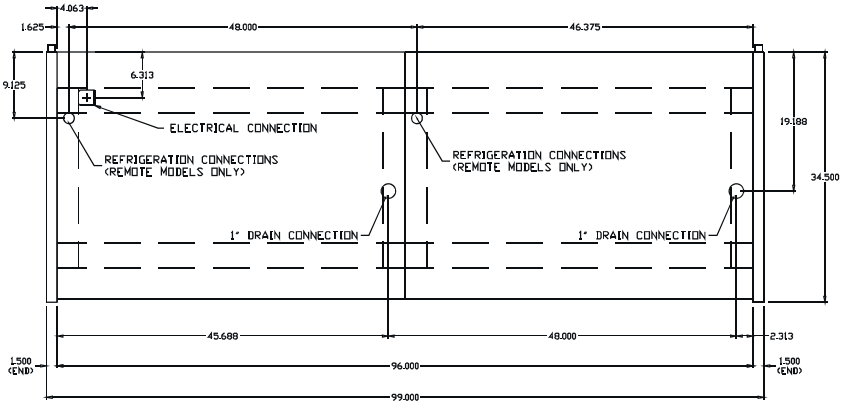



3' & 4' PLAN VIEWS

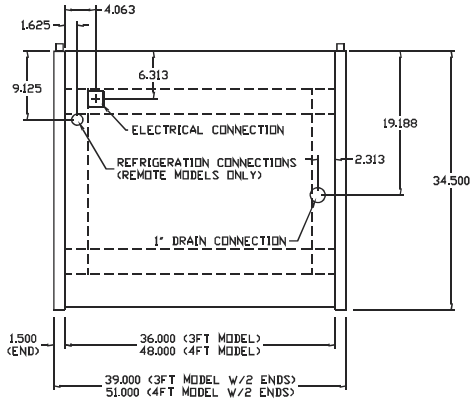



10' PLAN VIEW

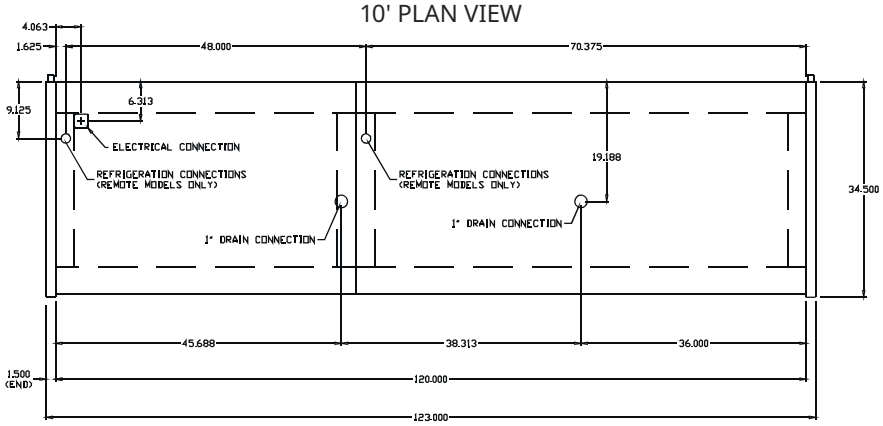


5' & 6' PLAN VIEWS

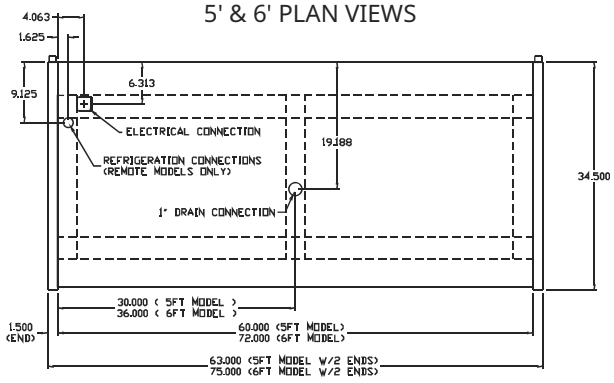


12' PLAN VIEW

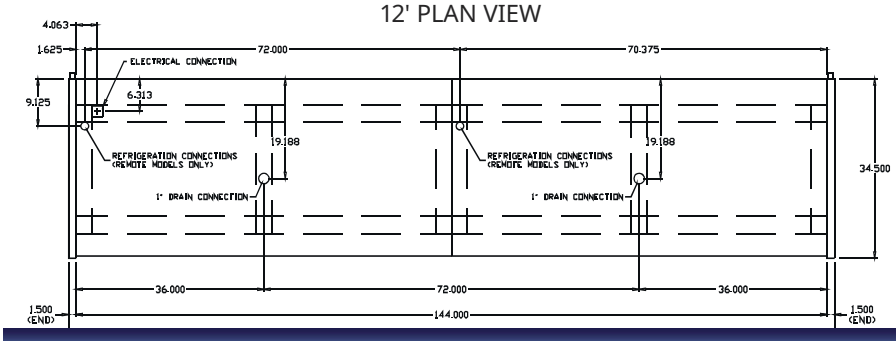


Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800
1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com