

35E SERIES ★

Howard
McCray

OPEN MERCHANDISERS - 78" H

BOX SOLID ENDS - ENDLESS DESIGN - MEAT



SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-OM35E-3-LED	39"	34.5"	78"	115	16	1/2	5-20P	498
SC-OM35E-4-LED	51"	34.5"	78"	115/208-230	13	3/4	L14-20P	630
SC-OM35E-5-LED	63"	34.5"	78"	115/208-230	16	1	L14-20P	686
SC-OM35E-6-LED	75"	34.5"	78"	115/208-230	16	1	L14-20P	804
SC-OM35E-8-LED	99"	34.5"	78"	115/208-230	16	1	L14-20P	892

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-OM35E-3-LED	39"	34.5"	78"	115	2.0	4906	NO	430
R-OM35E-4-LED	51"	34.5"	78"	115	3.0	6542	NO	552
R-OM35E-5-LED	63"	34.5"	78"	115	4.0	8176	NO	608
R-OM35E-6-LED	75"	34.5"	78"	115	4.0	9813	NO	708
R-OM35E-8-LED	99"	36.5"	78"	115	6.0	13084	NO	796
R-OM35E-10-LED	123"	36.5"	78"	115	7.0	16355	NO	1216
R-OM35E-12-LED	147"	36.5"	78"	115	8.0	19626	NO	1416

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

If no color is specified, white is the default color

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222 Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com



35E SERIES

OPEN MERCHANDISERS - 78" H

BOX SOLID ENDS - ENDLESS DESIGN - MEAT



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Removable white, black, or stainless steel floor pans
- White, black, or stainless steel end panels
- White, black, or stainless steel perforated rear wall (for even air distribution)
- Full length lighting at top of unit
- 4 levels of lighted shelving
- 5 levels of product display
- Price tag molding on each shelf
- Product stops on shelving

EXTERIOR

- White, black, or stainless steel ends and front
- Removable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Endless design allows for continuous line up

REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remote: Solenoid valve (Required)
- Remote: Temp. control (Required)

LIGHTING

- 1 row at inside top of unit
- 4 rows of lighted shelving

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed

FINISHES

- White, black, or stainless steel front rail
- White, black, or stainless steel end trim
- Laminate, and custom paints available
- White, black, or stainless steel end panels
- White, black, or stainless steel rear panels

OPTIONAL ACCESSORIES

- ☐ Extra row of shelves
- ☐ Night covers
- ☐ Security cover
- ☐ Peg bars
- ☐ Plexiglas insulated divider for line ups
- ☐ Stainless steel, laminated or paint
- ☐ Casters - Legs
- ☐ Digital thermometer
- ☐ Electric condensate pan
- ☐ Special color bumper



35E SERIES

OPEN MERCHANDISERS - 78" H

BOX SOLID ENDS - ENDLESS DESIGN - MEAT



TECHNICAL DATA

Model No.	SC R	SC-OM35E-3-LED R-OM35E-3-LED	SC-OM35E-4-LED R-OM35E-4-LED	SC-OM35E-5-LED R-OM35E-5-LED	SC-OM35E-6-LED R-OM35E-6-LED	SC-OM35E-8-LED R-OM35E-8-LED	R-OM35E-10- LED	R-OM35E-12-LED
Length with (2) ends		39"	51"	63"	75"	99"	123"	147"
Length without ends		36"	48"	60"	72"	96"	120"	143"
Height with ends		78"	78"	78"	78"	78"	78"	78"
Depth with ends		34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES	YES	YES	YES	YES
Operating temperature		34°F to 38°F	34°F to 38°F	34°F to 38°F	34°F to 38°F	34°F to 38°F	34°F to 38°F	34°F to 38°F
Compressor size HP	SC	1/2	3/4	1	1	1/4	Not included	Not included
Refrigeration system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day
BTU's at +20°F Evap. Temp.	R	4906	6542	8176	9813	13084	16355	19626
Voltage	SC	115	115/208-230	115/208-230	115/208-230	115/208-230	N/A	N/A
Amperage	SC	16	13	16	16	16	N/A	N/A
Voltage	R	115	115	115	115	115	115	115
Amperage, lights only	R	2.0	3.0	4.0	4.0	6.0	7.0	8.0
Cord and plug	SC R	5-20P N/A	L14-20P N/A	L14-20P N/A	L14-20P N/A	L14-20P N/A	N/A N/A	N/A N/A
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S	W, B, S	W, B, S	W, B, S
# of rows/ shelves		4/4	4/4	4/4	4/8	4/8	4/12	4/16
Shelf size		(4) 18"	(4) 18"	(4) 18"	(8) 18"	(8) 18"	(12) 18"	(16) 18"

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE


- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice



BOX SOLID ENDS - ENDLESS DESIGN - MEAT



FRONT VIEW

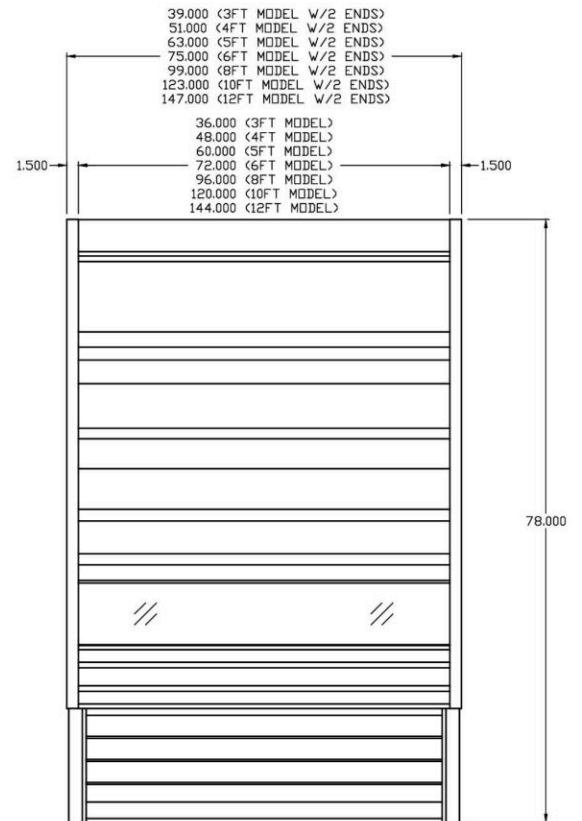

35E-SOLID 78,000 3,000 26,500 5,000 34,500 30,969 STANDARD

35E-CUR 78,000 3,000 26,500 5,000 34,500 30,969 OPTIONAL

35E-4PLX 78,000 3,000 26,500 5,000 34,500 30,969 OPTIONAL

35E-10PLX 78,000 3,000 26,500 5,000 34,500 30,969 OPTIONAL

35E-DTR 82,000 3,000 26,500 5,000 34,500 30,969 OPTIONAL



35E SERIES


OPEN MERCHANDISERS - 78" H

BOX SOLID ENDS - ENDLESS DESIGN - MEAT




PLAN VIEW


3/4 FOOT MODEL

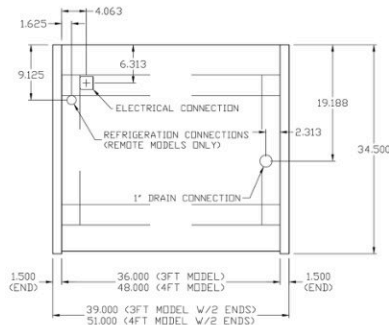


5/6/8 FOOT MODEL

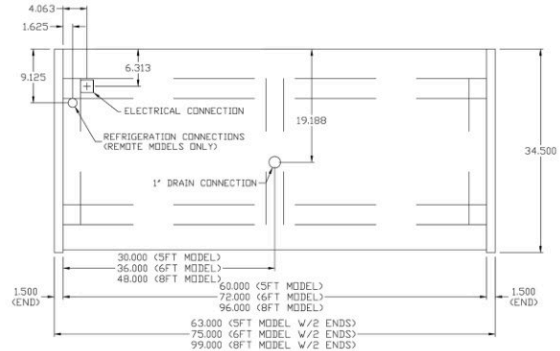

10 FOOT MODEL

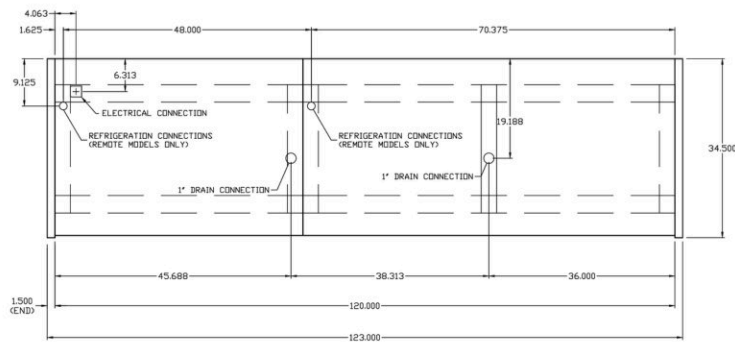

12 FOOT MODEL

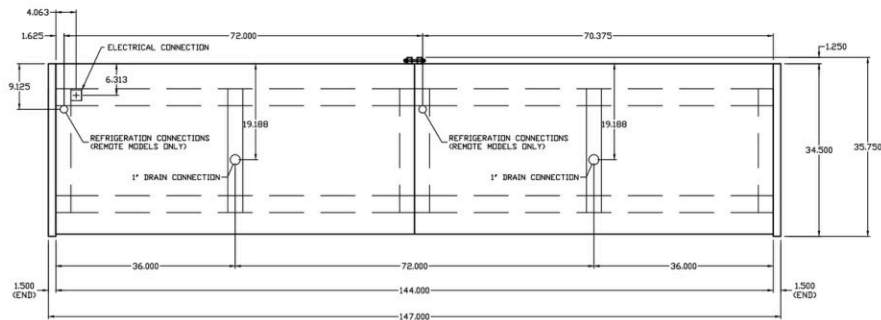

Data code: 09.2026

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com

