


35E SERIES ★


OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED PLEXI - MULTI-PURPOSE

Howard
McCray

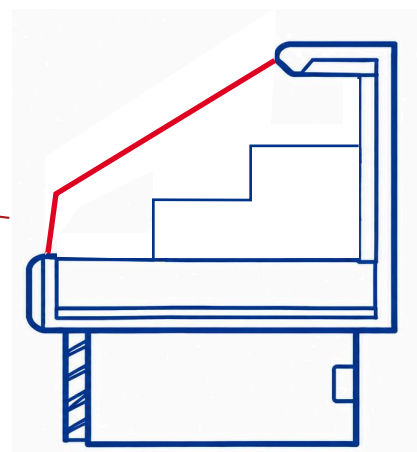

**STRAIGHT
SIDE GLASS**

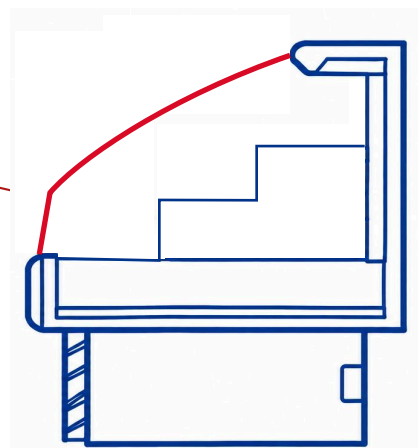

**CURVED
SIDE GLASS**



1-800-344-8222

Fax: (215) 969-4890

E-Mail: sales@howardmccray.com

Website: www.howardmccray.com

831 East Cayuga St. - Philadelphia, PA 19124 USA



35E SERIES

OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED - MULTI-PURPOSE



MODEL SPECIFICATIONS

SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-OS35E-3	39"	34.5"	44"	115	12	1/2	5-15P	358
SC-OS35E-4	51"	34.5"	44"	115	13.1	1/2	5-20P	418
SC-OS35E-5	63"	34.5"	44"	115	16	3/4	5-20P	476
SC-OS35E-6	75"	34.5"	44"	115	16	3/4	5-20P	540

CURVED SIDES

SC-OS35E-3C	39"	34.5"	44"	115	12	1/2	5-15P	358
SC-OS35E-4C	51"	34.5"	44"	115	13.1	1/2	5-20P	418
SC-OS35E-5C	63"	34.5"	44"	115	16	3/4	5-20P	476
SC-OS35E-6C	75"	34.5"	44"	115	16	3/4	5-20P	540

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-OS35E-3	39"	34.5"	44"	115	0.7	3658	Hardwired	287
R-OS35E-4	51"	34.5"	44"	115	1.4	4875	Hardwired	347
R-OS35E-5	63"	34.5"	44"	115	1.4	6096	Hardwired	401
R-OS35E-6	75"	34.5"	44"	115	1.4	7316	Hardwired	465

CURVED SIDES

R-OS35E-3C	39"	34.5"	44"	115	0.7	3658	Hardwired	287
R-OS35E-4C	51"	34.5"	44"	115	1.4	4875	Hardwired	347
R-OS35E-5C	63"	34.5"	44"	115	1.4	6096	Hardwired	401
R-OS35E-6C	75"	34.5"	44"	115	1.4	7316	Hardwired	465

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

SL = Sliding Rear Door SW = Swinging Rear Door

1-800-344-8222

Fax: (215) 969-4890

E-Mail: sales@howardmccray.com

Website: www.howardmccray.com

831 East Cayuga St. - Philadelphia, PA 19124 USA



35E SERIES

OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED - MULTI-PURPOSE



STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Removable black or stainless steel floor pans
- Black or stainless steel end panels
- Black, or stainless steel perforated rear wall (for even air distribution)
- Step shelves
- Condensate pan

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed

FINISHES

- White, black or stainless steel exterior
- White, black or stainless steel interior
- Laminate exterior
- Custom paint exterior

EXTERIOR

- White, black or stainless steel ends and front and back
- White, black or stainless steel color band
- Removable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels Curved or Straight plexi
- Night cover standard

REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remote: Solenoid valve (Required)
- Remote: Temp. control (Required)

OPTIONAL ACCESSORIES

- ☐ LED Lights at top of the unit
- ☐ Plexiglas divider for line ups
- ☐ Digital thermometer
- ☐ Security cover
- ☐ Stainless steel, laminated or paint
- ☐ Insulated divider for line ups
- ☐ Casters
- ☐ Stainless steel interior 2" bumper
- ☐ Special color bumper
- ☐ Legs

35E SERIES

OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED - MULTI-PURPOSE



TECHNICAL DATA

Model No.	SC R	SC-OS35E-3 R-OS35E-3 SC-OS35E-3C R-OS35E-3C	SC-OS35E-4 R-OS35E-4 SC-OS35E-4C R-OS35E-4C	SC-OS35E-5 R-OS35E-5 SC-OS35E-5C R-OS35E-5C	SC-OS35E-6 R-OS35E-6 SC-OS35E-6C R-OS35E-6C
Length with ends		39"	51"	63"	75"
Length without ends		36"	48"	60"	72"
Height with ends		44"	44"	44"	44"
Depth with ends		34"	34"	34"	34"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/2	1/2	3/4	3/4
Refrigeration system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day
BTU's at +20°F Evap. Temp.	R	3658	4875	6096	7316
Voltage	SC	115	115	115	115
Amperage	SC	12	13.1	16	16
Voltage	R	115	115	115	115
Amperage	R	0.7	1.4	1.4	1.4
Cord and plug	SC R	5-15P N/A	5-20P N/A	5-20P N/A	5-20P N/A
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S
Shelves		Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE



- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice




35E SERIES
OPEN MERCHANDISERS - 44" H
STRAIGHT & CURVED - MULTI-PURPOSE



PLAN VIEW

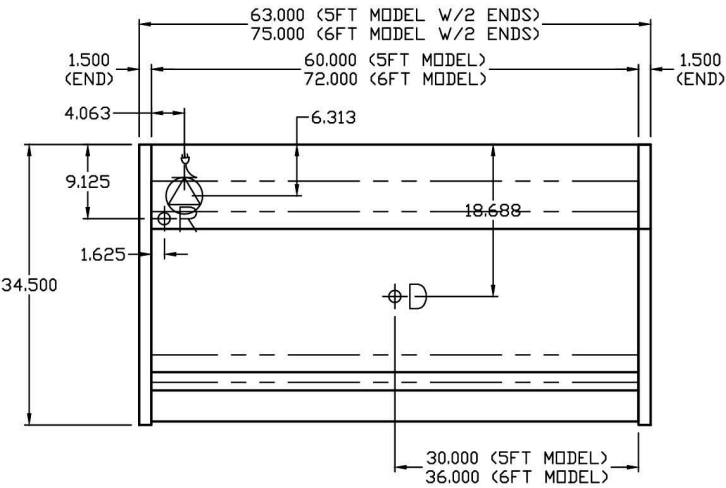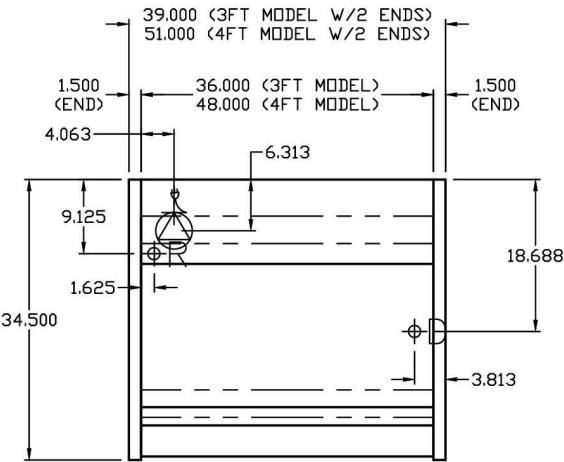

FRONT VIEW

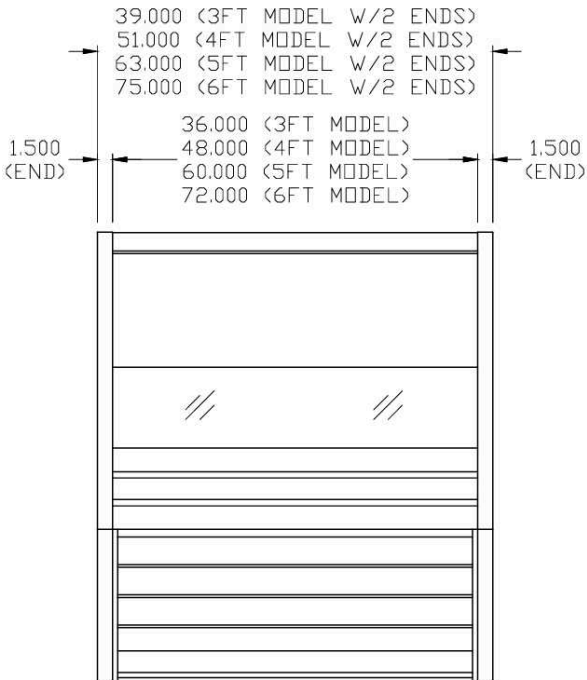

Data code: 09.2026

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com




35E SERIES

OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED - MULTI-PURPOSE



DRAWINGS

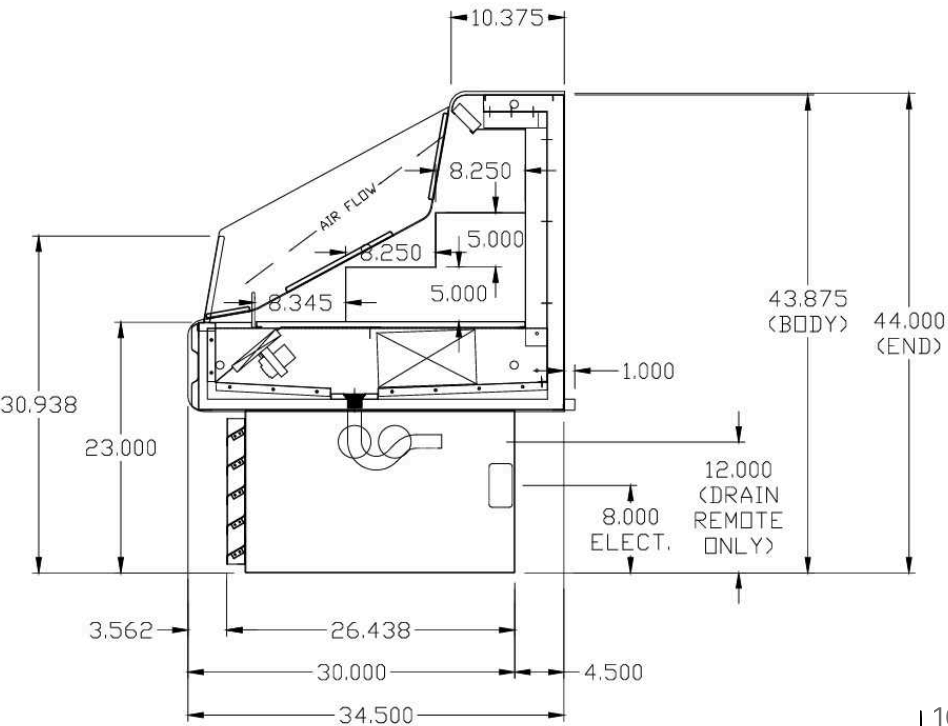

SIDE VIEW
STRAIGHT GLASS

SIDE VIEW
CURVED GLASS

