
35E SERIES ★

OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED PLEXI - MULTI-PURPOSE


Howard McCray



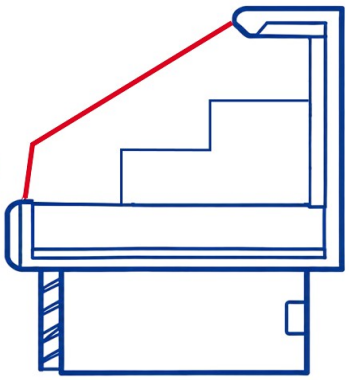

STRAIGHT
SIDE GLASS



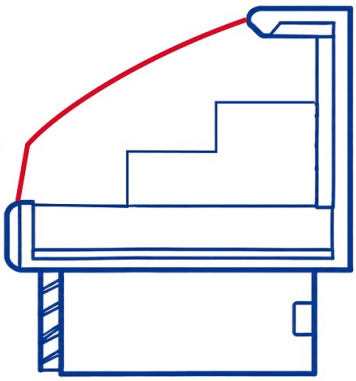

CURVED
SIDE GLASS

1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com
831 East Cayuga St. - Philadelphia, PA 19124 USA

35E SERIES

OPEN MERCHANDISERS - 44'' H

STRAIGHT & CURVED - MULTI-PURPOSE

MODEL SPECIFICATIONS

SELF-CONTAINED

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
SC-OS35E-3	39”	34.5"	44"	115	12	1/2	5-15P	358
SC-OS35E-4	51”	34.5”	44"	115	13.1	1/2	5-20P	418
SC-OS35E-5	63"	34.5"	44"	115	16	3/4	5-20P	476
SC-OS35E-6	75"	34.5"	44"	115	16	3/4	5-20P	540
CURVED SIDES								
SC-OS35E-3C	39”	34.5"	44"	115	12	1/2	5-15P	358
SC-OS35E-4C	51”	34.5”	44"	115	13.1	1/2	5-20P	418
SC-OS35E-5C	63"	34.5"	44"	115	16	3/4	5-20P	476
SC-OS35E-6C	75"	34.5"	44"	115	16	3/4	5-20P	540

REMOTE

MODEL NO.	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
R-OS35E-3	39”	34.5"	44"	115	0.7	4390	NO	287
R-OS35E-4	51”	34.5”	44"	115	1.4	4390	NO	347
R-OS35E-5	63"	34.5"	44"	115	1.4	6640	NO	401
R-OS35E-6	75"	34.5"	44"	115	1.4	6640	NO	465
CURVED SIDES								
R-OS35E-3C	39”	34.5"	44"	115	0.7	4390	NO	287
R-OS35E-4C	51”	34.5”	44"	115	1.4	4390	NO	347
R-OS35E-5C	63"	34.5"	44"	115	1.4	6640	NO	401
R-OS35E-6C	75"	34.5"	44"	115	1.4	6640	NO	465

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

C= Curved Glass

1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com
831 East Cayuga St. - Philadelphia, PA 19124 USA

35E SERIES

OPEN MERCHANDISERS - 44'' H

STRAIGHT & CURVED - MULTI-PURPOSE

Howard McCray

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- Removable black or stainless steel floor pans
- Black or stainless steel end panels
- Black, or stainless steel perforated rear wall (for even air distribution)
- Step shelves
- Condensate pan

EXTERIOR

- White, black or stainless steel ends and front and back
- White, black or stainless steel color band
- Removable front grill allows for cleaning and servicing
- 1" bumper
- Choice of end panels Curved or Straight plexi
- Night cover standard

CONSTRUCTION

- UL Classified to NSF/ANSI 7
- Foamed in place CFC free foam
- Heavy gauge steel super structure
- Multi deck
- Endless design allows for continuous line up

REFRIGERATION

- Low velocity fans located below deck area (to insure even flow of air)
- Electronic Control System with automatic air defrost to maintain balanced temperatures
- New high efficiency air screen technology
- Self contained system
- Copeland hermetic unit
- Remote: Solenoid valve (Required)
- Remote: Temp. control (Required)

ELECTRICAL REQUIREMENTS

- With and without power cord (depends on model number)
- UL/CUL listed

FINISHES

- White, black or stainless steel exterior
- White, black or stainless steel interior
- Laminate exterior
- Custom paint exterior

OPTIONAL ACCESSORIES

- ☐ LED Lights at top of the unit
- ☐ Security cover
- ☐ Casters
- ☐ Legs
- ☐ Plexiglas divider for line ups
- ☐ Stainless steel, laminated or paint
- ☐ Stainless steel interior 2'' bumper
- ☐ Digital thermometer
- ☐ Insulated divider for line ups
- ☐ Special color bumper

35E SERIES

OPEN MERCHANDISERS - 44'' H

STRAIGHT & CURVED - MULTI-PURPOSE

TECHNICAL DATA

Model No.	SC R	SC-OS35E-3 R-OS35E-3 SC-OS35E-3C R-OS35E-3C	SC-OS35E-4 R-OS35E-4 SC-OS35E-4C R-OS35E-4C	SC-OS35E-5 R-OS35E-5 SC-OS35E-5C R-OS35E-5C	SC-OS35E-6 R-OS35E-6 SC-OS35E-6C R-OS35E-6C
Length with ends		39"	51"	63"	75"
Length without ends		36"	48"	60"	72"
Height with ends		44"	44"	44"	44"
Depth with ends		34"	34"	34"	34"
Endless design (Dimensions are +/- 1/4")		YES	YES	YES	YES
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor size HP	SC	1/2	1/2	3/4	3/4
Refrigration system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day	Electronic controlled 6 per day
BTU's at +20°F Evap. Temp.	R	3658	4875	6096	7316
Voltage	SC	115	115	115	115
Amperage	SC	12	13.1	16	16
Voltage	R	115	115	115	115
Amperage	R	0.7	1.4	1.4	1.4
Cord and plug	SC R	5-15P N/A	5-20P N/A	5-20P N/A	5-20P N/A
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S
Shelves		Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth	Step shelf (2) 8.25" depth

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE


- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice

35E SERIES


OPEN MERCHANDISERS - 44" H

STRAIGHT & CURVED - MULTI-PURPOSE

DRAWINGS

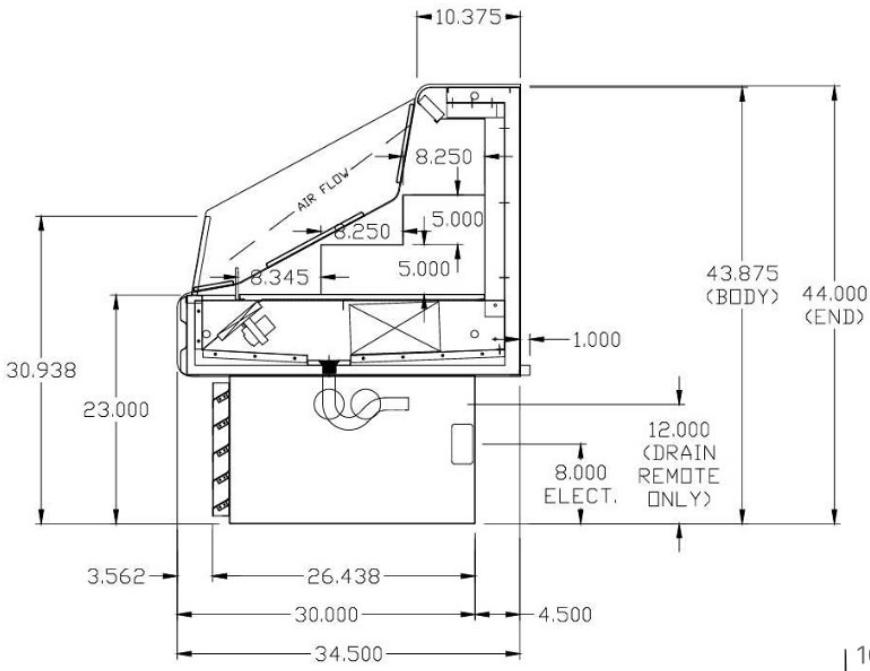

SIDE VIEW STRAIGHT GLASS

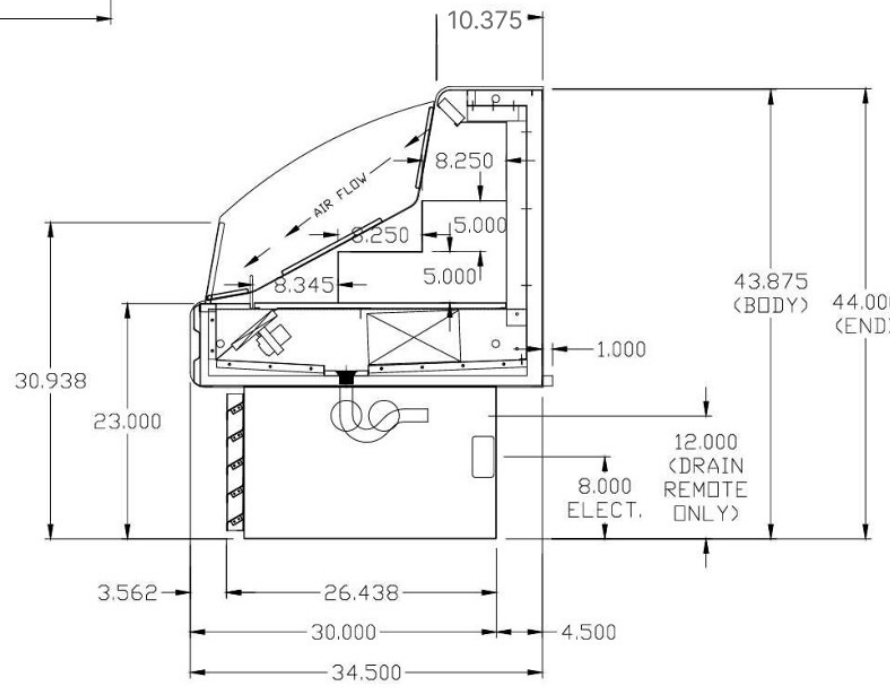


SIDE VIEW CURVED GLASS


35E SERIES

OPEN MERCHANDISERS - 44" H


STRAIGHT & CURVED - MULTI-PURPOSE

PLAN VIEW

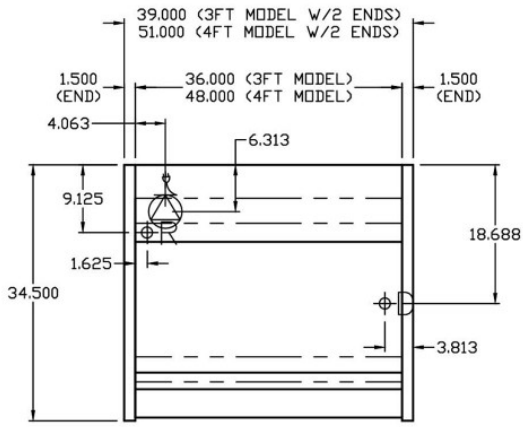

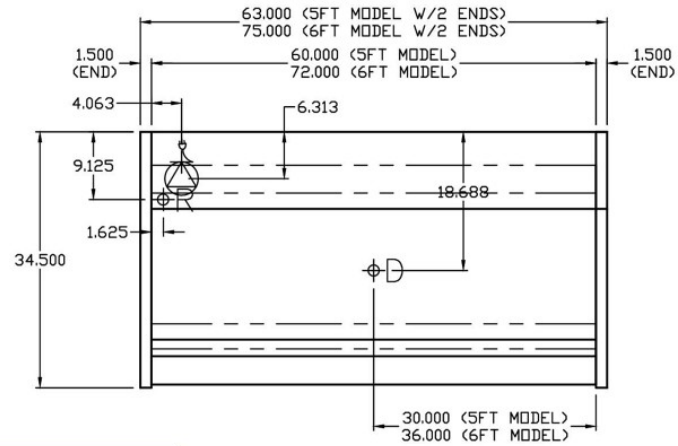

FRONT VIEW

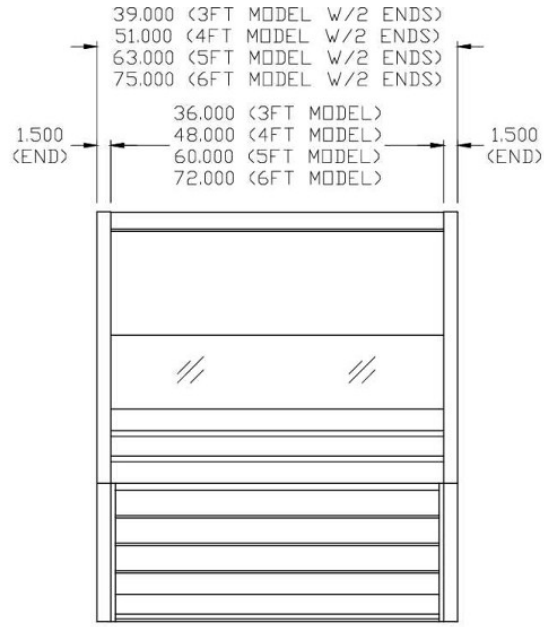

Data code: 09.2026

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com