

GSR Series - Sliding Glass Doors Top Mount Refrigerators - 83"H



Model No.	Description	Length	Depth	Height	Voltage	Amps	HP/BTUs	Power Cord	Est. Ship Weight
GSR48	Two Door	52.25"	34.75"	83"	115	10.1	1/3 / 2300	5-15P	490
GSR75	Three Door	78.00"	34.75"	83"	115	13	1/2 / 4400	5-20P	715
GSR102	Four Door	103.75"	34.75"	83"	115/208-230	6.4/7.1	3/4 / 5920	L14-20P	950

MODEL NUMBER PREFIX - SC = Self Contained R = Remote
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
 • Cases are equipped with drains; check your local building codes for connection requirements.
 • Specification subject to change without notice
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



GSR Series - Sliding Glass Doors Top Mount Refrigerators - 83"H

Standard Specifications and Optional Features

CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Heavy Duty Construction
- Foamed in place CFC free foam
- Removable front grille for easy servicing
- 2, 3, or 4 door models available

INTERIOR

- White aluminum ends and back (optional black and stainless steel)
- White aluminum floors (optional black and stainless steel)
- Aluminum evaporator fan housing
- 4 heavy duty epoxy coated shelves per door
- Mounted thermometer

EXTERIOR

- White aluminum ends and fronts
- Triple pane glass doors
(provides wide view display)

FINISHES

- Doors - Style 101 - chrome finish

LIGHTING

- Vertical light behind mullion
- 2 Dr = 1 light
- 3 Dr = 2 light
- 4 Dr = 3 light

ELECTRICAL REQUIREMENTS

- Cord and Plug
- UL/CUL listed
- 115V/208-230V

REFRIGERATION

- R134A expansion valve system
- 2, 3, and 4 door expansion valve
- Remote available

OPTIONAL FEATURES

- Extra shelf with clips
- Door locks
- Stainless steel, laminated or paint
- 5" casters
- 6" legs

Important Note:

**All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.
Product must be cooled before being displayed within the case.**

DRAIN IS REQUIRED

GSR Series - Sliding Glass Doors Top Mount Refrigerators - 83"H

Technical Data

Model No.	SC R	GSR48 R-GSR48	GSR75 R-GSR75	GSR102 R-GSR102
Length		52.25"	78.00"	103.75"
Height w/ 5" casters		83.00"	83.00"	83.00"
Depth with drain cover		34.75"	34.75"	34.75"
<i>(Dimensions are +/- 1/4")</i>				
Operating temperature		358°F to 39°F	358°F to 39°F	358°F to 39°F
Refrigerant (expansion valve)	SC	R134a	R134a	R134a
System type		Capillary tube	Capillary tube	Expansion valve
Compressor size HP	SC	1/3	1/2	3/4
Refrigeration		Temp. control	Temp. control	Pressure control
Defrost per day (24 hours)	Air Defrost	1 per day	1 per day	1 per day
BTU's at +20°F Evap. Temp.	R	2300	4400	5920
Voltage	SC	115	115	115/208-230
Amperage	SC	10.1	13	6.4/7.1
Amps - lights, fans, remotes	R	2.5	3.3	4.9
Cord and plug	SC	5-15P	5-20P	L14-20P
	R	NO	NO	NO
Exterior color		W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S
Inside end panels		W, B, S	W, B, S	W, B, S
Floors		W, B, S	W, B, S	W, B, S
Drain electric condensate		YES	YES	YES
Total Shelves		8	12	16
Door Size		(2) 23.88" x 59.50"	(2) 23.68" x 59.50" (1) 27.00" x 59.50"	(4) 23.88" x 59.50"
Cubic Capacity		48	75	102
Shipping Info				
Height		86"	86"	86"
Depth		44"	44"	44"
Length		58"	84"	109"
Gross weight SC/R		490/375	715/590	950/800
Cubic feet		118	171	223

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)

Prefix

SC = Self Contained
R = Remote


Suffix

B = Black
W = White
S = Stainless Steel
LS = T8 lighting
LED = LED lighting

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

GSR Series - Sliding Glass Doors Top Mount Refrigerators - 83"H

Technical Data • Side View • Plan View

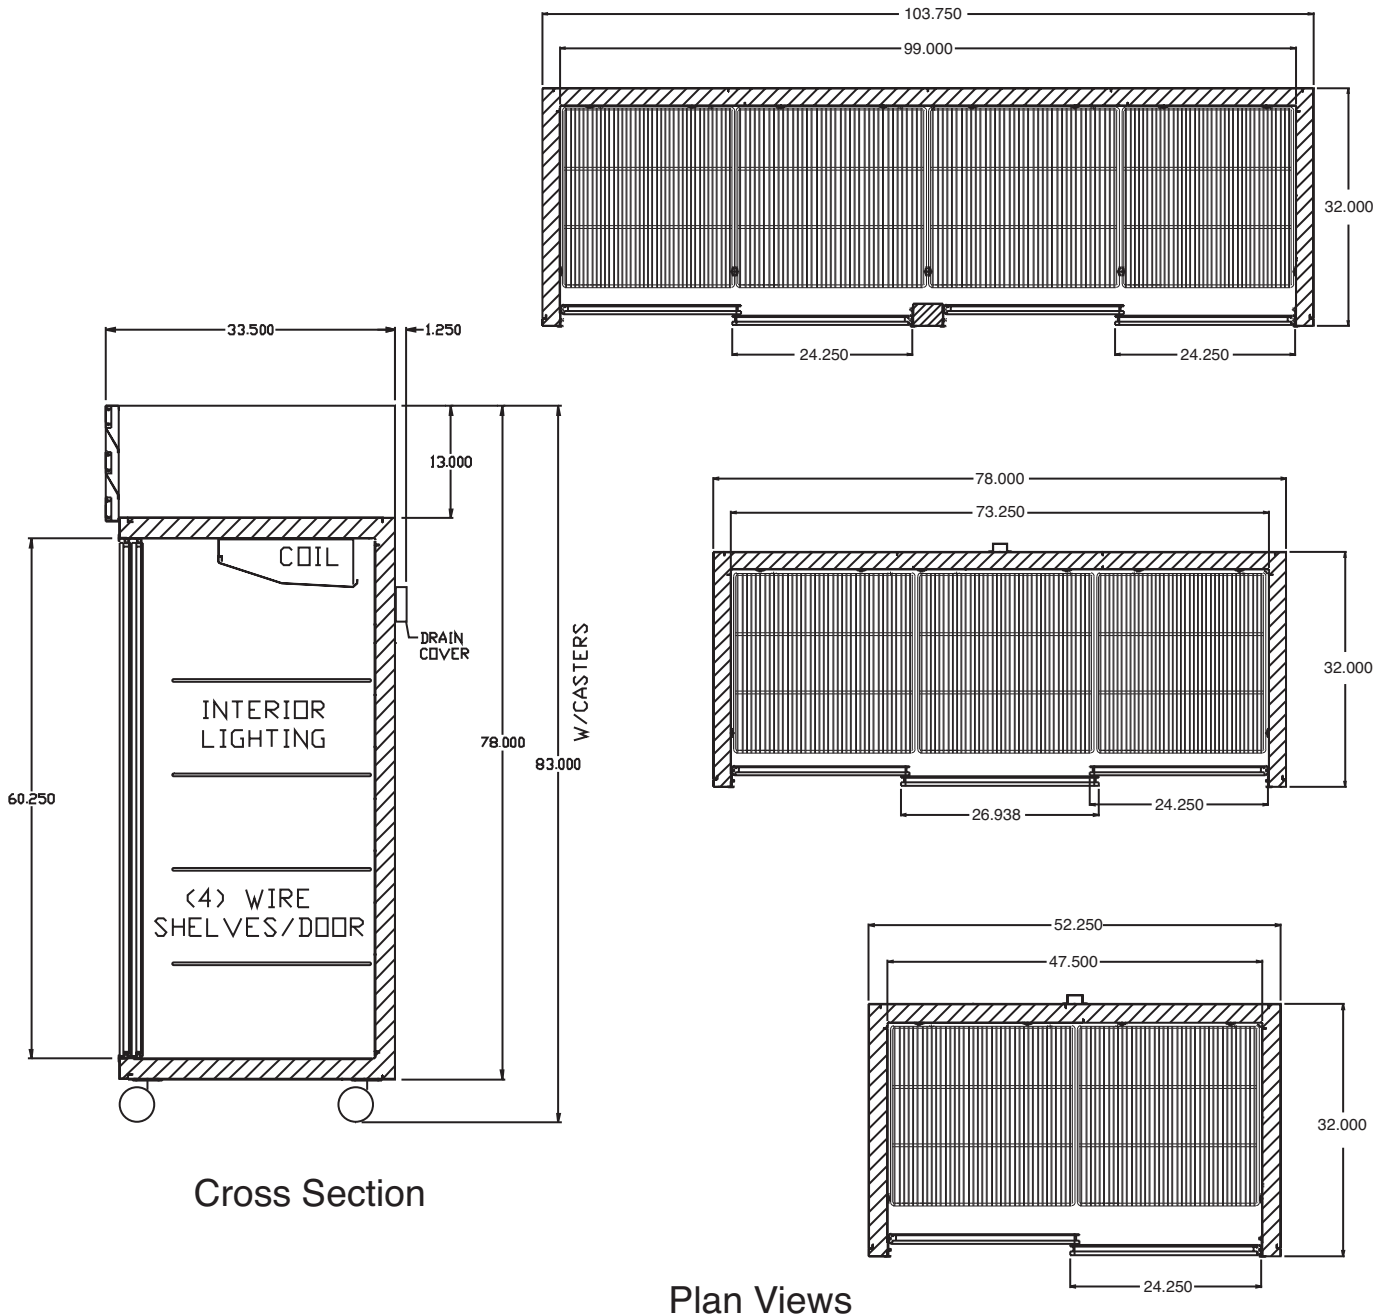

Cross Section

Plan Views